Full - Bridge MOSFET Power Module

V_{DSS} = 500V
R_{DSon} = 75mΩ typ @ Tj = 25°C
I_D = 46A @ Tc = 25°C

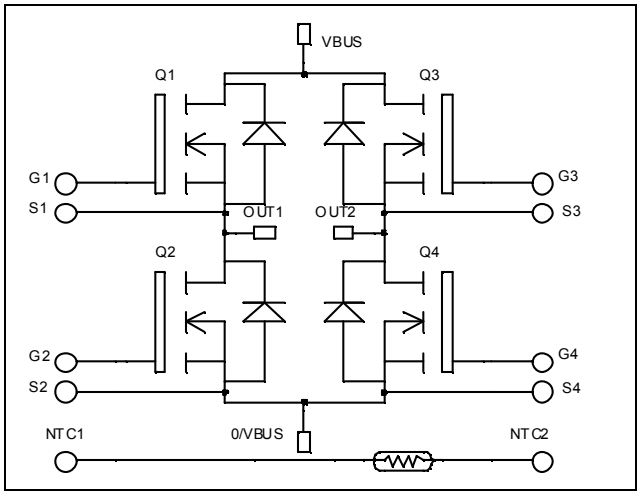

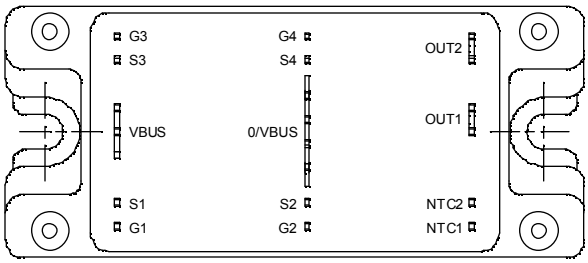

Application

- Welding converters
- Switched Mode Power Supplies
- Uninterruptible Power Supplies

Features

- Power MOS 7® FREDFETs
  - Low R_{DSon}
  - Low input and Miller capacitance
  - Low gate charge
  - Fast intrinsic reverse diode
  - Avalanche energy rated
  - Very rugged
- Kelvin source for easy drive
- Very low stray inductance
  - Symmetrical design
  - Lead frames for power connections
- Internal thermistor for temperature monitoring
- High level of integration

Benefits

- Outstanding performance at high frequency operation
- Direct mounting to heatsink (isolated package)
- Low junction to case thermal resistance
- Solderable terminals both for power and signal for easy PCB mounting
- Low profile
- RoHS Compliant

Absolute maximum ratings

Symbol	*Parameter*		*Max ratings*	*Unit*
V_{DSS}	Drain - Source Breakdown Voltage		500	V
I_D	Continuous Drain Current	T_c = 25°C	46	A
		T_c = 80°C	34	
I_{DM}	Pulsed Drain current		184	
V_{GS}	Gate - Source Voltage		±30	V
R_{DSon}	Drain - Source ON Resistance		90	mΩ
P_D	Maximum Power Dissipation	T_c = 25°C	357	W
I_{AR}	Avalanche current (repetitive and non repetitive)		46	A
E_{AR}	Repetitive Avalanche Energy		50	mJ
E_{AS}	Single Pulse Avalanche Energy		2500	

CAUTION: These Devices are sensitive to Electrostatic Discharge. Proper Handing Procedures Should Be Followed. See application note APT0502 on www.microsemi.com

All ratings @ T_j = 25°C unless otherwise specified

Electrical Characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
I_{DSS}	Zero Gate Voltage Drain Current	V_{GS} = 0V, V_{DS} = 500V	T_j = 25°C			100	µA
		V_{GS} = 0V, V_{DS} = 400V	T_j = 125°C			500	
$R_{DS(on)}$	Drain – Source on Resistance	V_{GS} = 10V, I_D = 23A			75	90	mΩ
$V_{GS(th)}$	Gate Threshold Voltage	V_{GS} = V_{DS}, I_D = 2.5mA		3		5	V
I_{GSS}	Gate – Source Leakage Current	V_{GS} = ±30 V, V_{DS} = 0V				±100	nA

Dynamic Characteristics

Symbol	*Characteristic*	*Test Conditions*	*Min*	*Typ*	*Max*	*Unit*
C_{iss}	Input Capacitance	V_{GS} = 0V V_{DS} = 25V f = 1MHz		5600		pF
C_{oss}	Output Capacitance			1200		
C_{rss}	Reverse Transfer Capacitance			90		
Q_g	Total gate Charge	V_{GS} = 10V V_{Bus} = 250V I_D = 46A		123		nC
Q_{gs}	Gate – Source Charge			33		
Q_{gd}	Gate – Drain Charge			65		
$T_{d(on)}$	Turn-on Delay Time	**Inductive switching @ 125°C** V_{GS} = 15V V_{Bus} = 333V I_D = 46A R_G = 5Ω		18		ns
T_r	Rise Time			35		
$T_{d(off)}$	Turn-off Delay Time			87		
T_f	Fall Time			77		
E_{on}	Turn-on Switching Energy	**Inductive switching @ 25°C** V_{GS} = 15V, V_{Bus} = 333V I_D = 46A, R_G = 5Ω		755		µJ
E_{off}	Turn-off Switching Energy			726		
E_{on}	Turn-on Switching Energy	**Inductive switching @ 125°C** V_{GS} = 15V, V_{Bus} = 333V I_D = 46A, R_G = 5Ω		1241		µJ
E_{off}	Turn-off Switching Energy			846		

Source - Drain diode ratings and characteristics

Symbol	*Characteristic*	*Test Conditions*		*Min*	*Typ*	*Max*	*Unit*
I_S	Continuous Source current (Body diode)		Tc = 25°C			46	A
			Tc = 80°C			34	
V_{SD}	Diode Forward Voltage	V_{GS} = 0V, I_S = - 46A				1.3	V
dv/dt	Peak Diode Recovery ❶					15	V/ns
t_{rr}	Reverse Recovery Time	I_S = - 46A V_R = 333V di_S/dt = 100A/µs	T_j = 25°C		233		ns
			T_j = 125°C		499		
Q_{rr}	Reverse Recovery Charge		T_j = 25°C		1.9		µC
			T_j = 125°C		5.7		

❶ dv/dt numbers reflect the limitations of the circuit rather than the device itself.
$I_S \le$ - 46A di/dt ≤ 700A/µs $V_R \le V_{DSS}$ $T_j \le$ 150°C

Thermal and package characteristics

Symbol	Characteristic			Min	Typ	Max	Unit
R_{thJC}	Junction to Case Thermal Resistance					0.35	°C/W
V_{ISOL}	RMS Isolation Voltage, any terminal to case t =1 min, I isol<1mA, 50/60Hz			2500			V
T_J	Operating junction temperature range			-40		150	°C
T_{STG}	Storage Temperature Range			-40		125	
T_C	Operating Case Temperature			-40		100	
Torque	Mounting torque	To Heatsink	M5	2.5		4.7	N.m
Wt	Package Weight					160	g

Temperature sensor NTC (see application note APT0406 on www.microsemi.com for more information).

Symbol	Characteristic	Min	Typ	Max	Unit
R_{25}	Resistance @ 25°C		50		kΩ
$B_{25/85}$	T_{25} = 298.15 K		3952		K

$$R_T = \frac{R_{25}}{\exp\left[B_{25/85}\left(\frac{1}{T_{25}} - \frac{1}{T}\right)\right]}$$

T: Thermistor temperature
R_T: Thermistor value at T

SP4 Package outline (dimensions in mm)

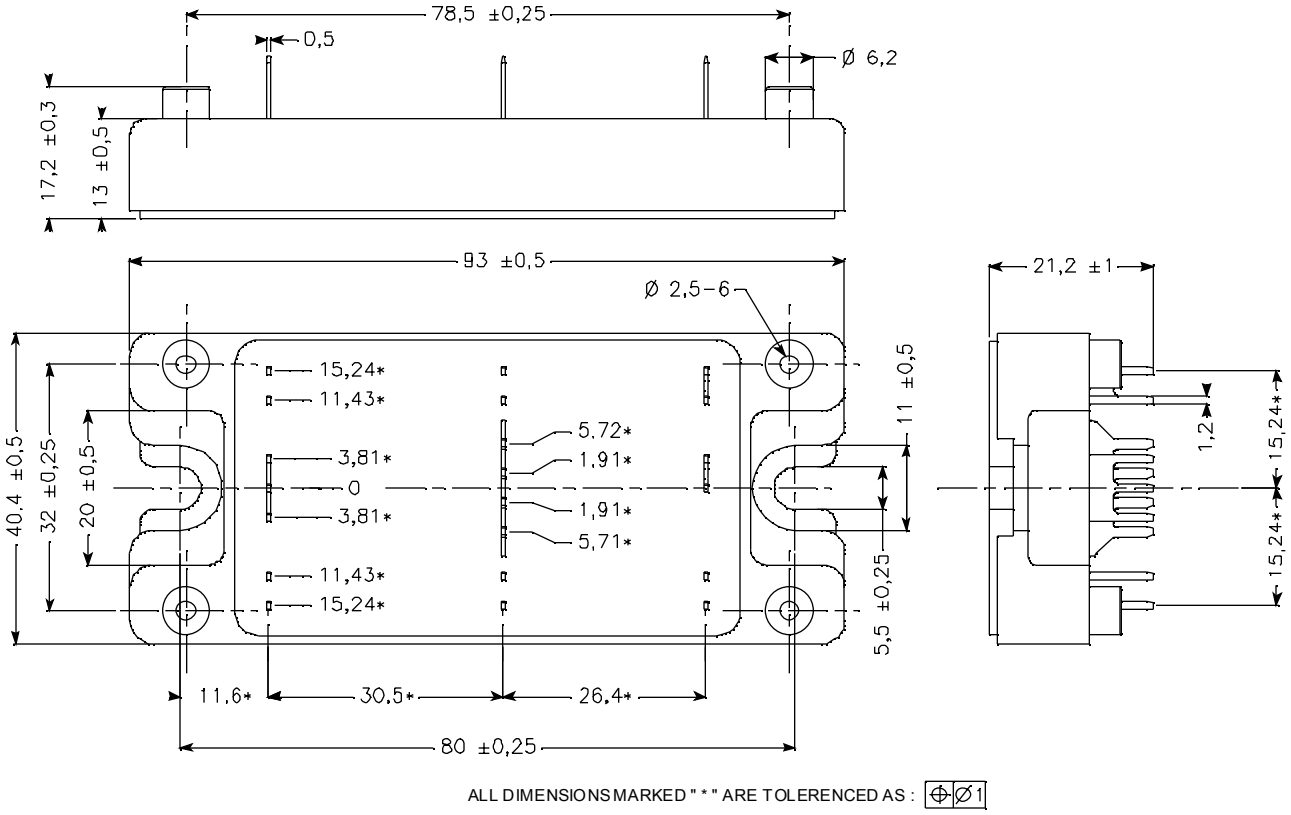

ALL DIMENSIONS MARKED " * " ARE TOLERENCED AS : ⌖ Ø 1

See application note APT0501 - Mounting Instructions for SP4 Power Modules on www.microsemi.com

Typical Performance Curve

Maximum Effective Transient Thermal Impedance, Junction to Case vs Pulse Duration

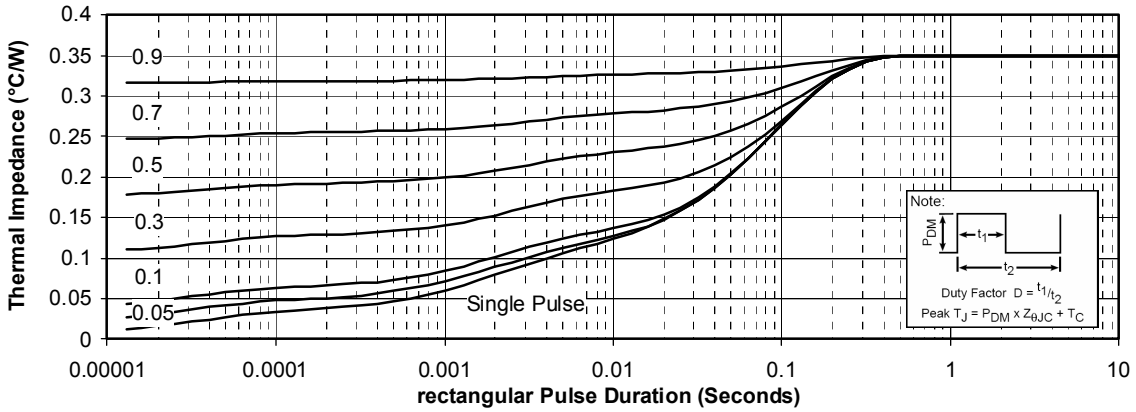

Low Voltage Output Characteristics

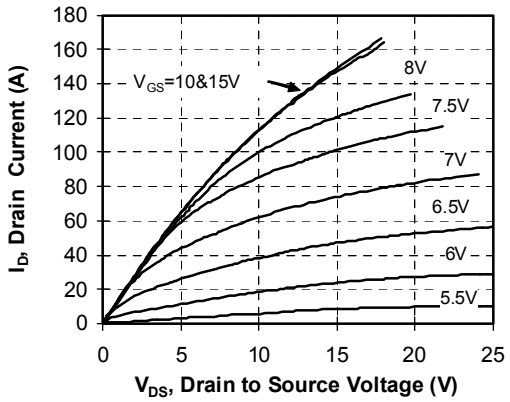

Transfert Characteristics

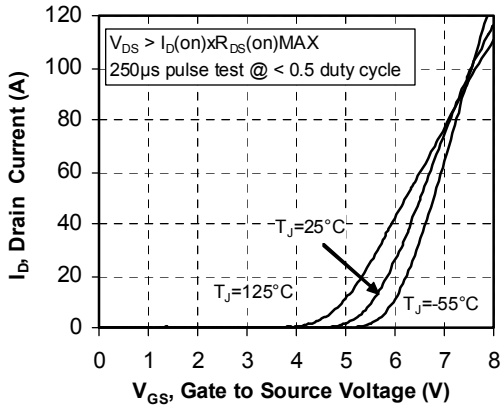

R_{DS}(on) vs Drain Current

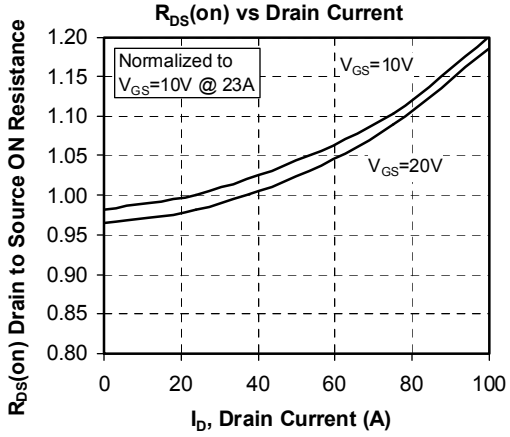

DC Drain Current vs Case Temperature

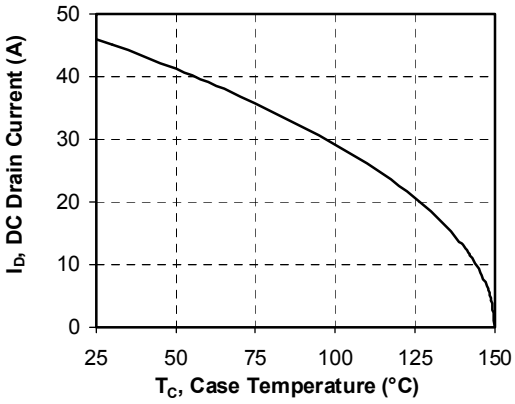

Breakdown Voltage vs Temperature

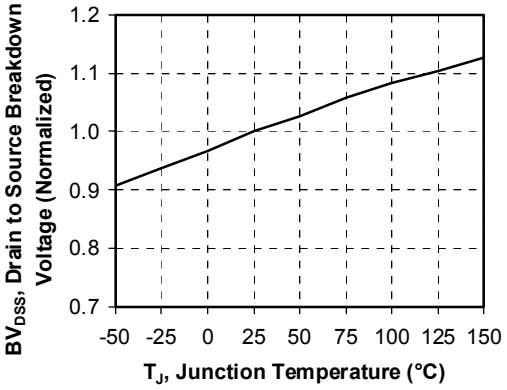

ON resistance vs Temperature

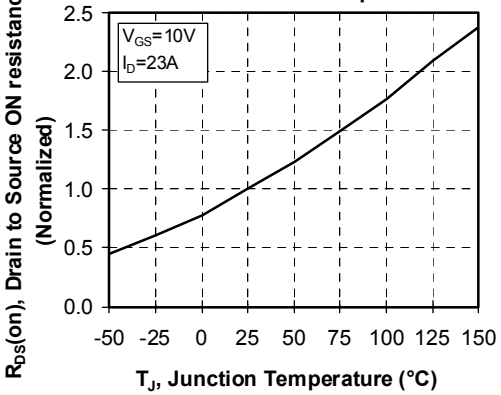

Threshold Voltage vs Temperature

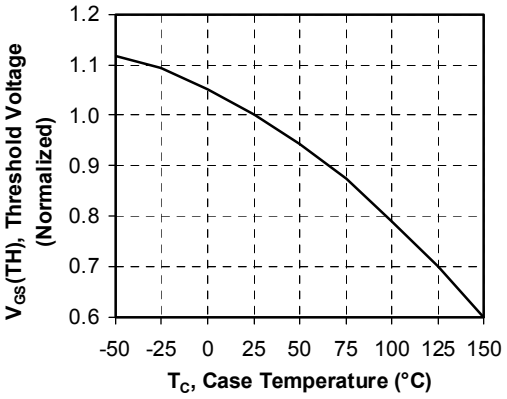

Maximum Safe Operating Area

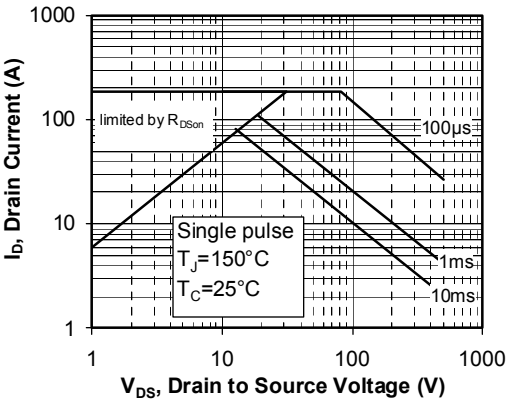

Capacitance vs Drain to Source Voltage

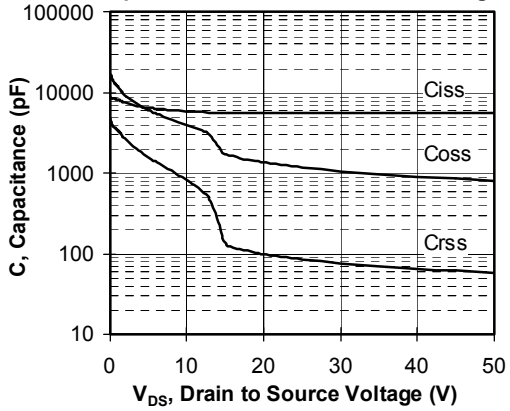

Gate Charge vs Gate to Source Voltage

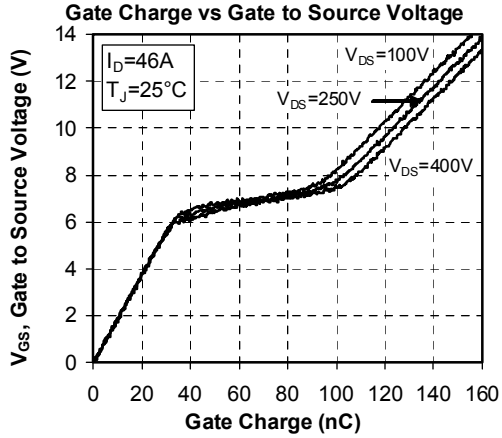

Delay Times vs Current

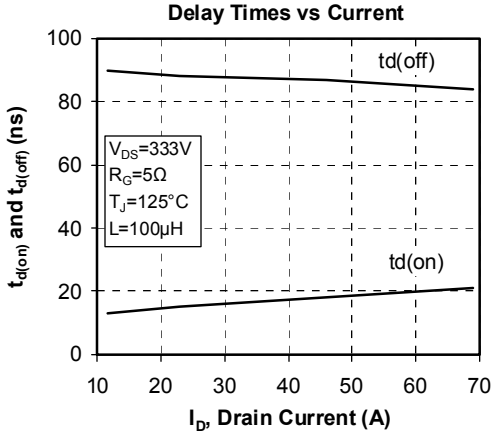

Rise and Fall times vs Current

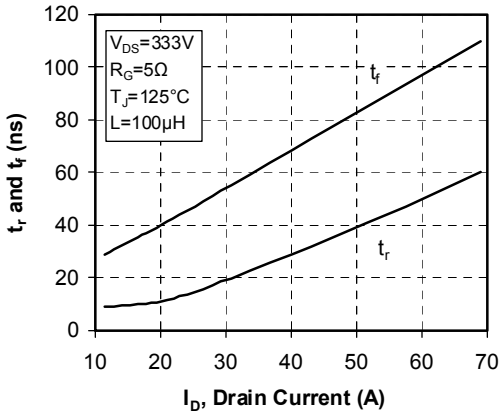

Switching Energy vs Current

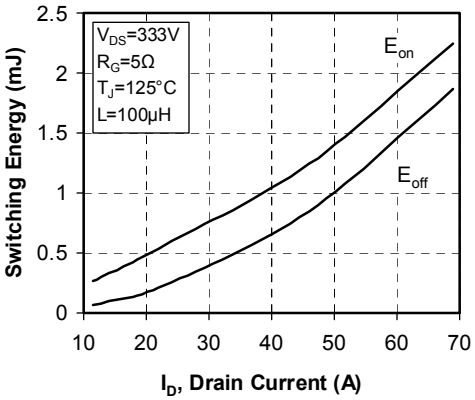

Switching Energy vs Gate Resistance

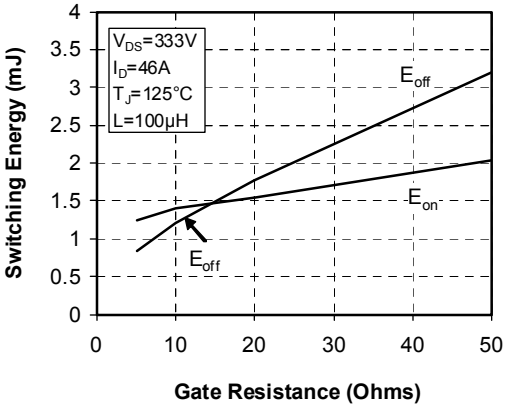

Operating Frequency vs Drain Current

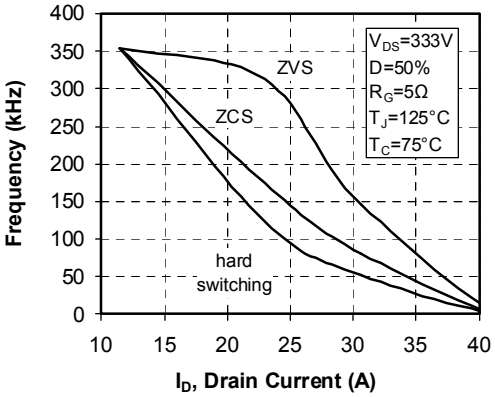

Source to Drain Diode Forward Voltage

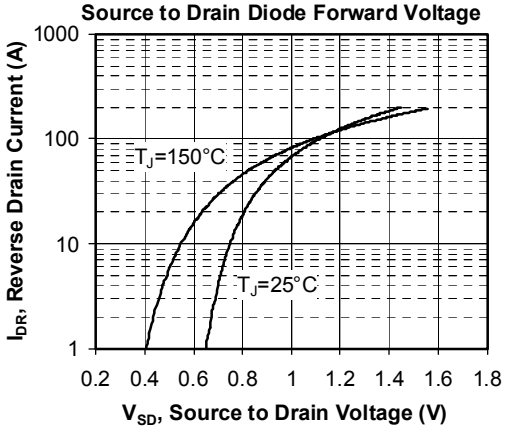

Microsemi reserves the right to change, without notice, the specifications and information contained herein

Microsemi's products are covered by one or more of U.S patents 4,895,810 5,045,903 5,089,434 5,182,234 5,019,522 5,262,336 6,503,786 5,256,583 4,748,103 5,283,202 5,231,474 5,434,095 5,528,058 and foreign patents. U.S and Foreign patents pending. All Rights Reserved.