


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/16/09	

APPROVED: _____


DATE: _____ TITLE: _____

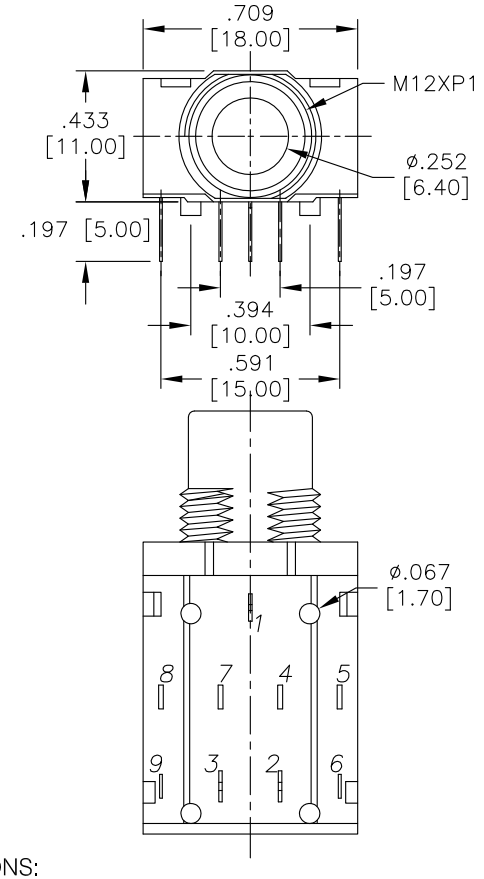

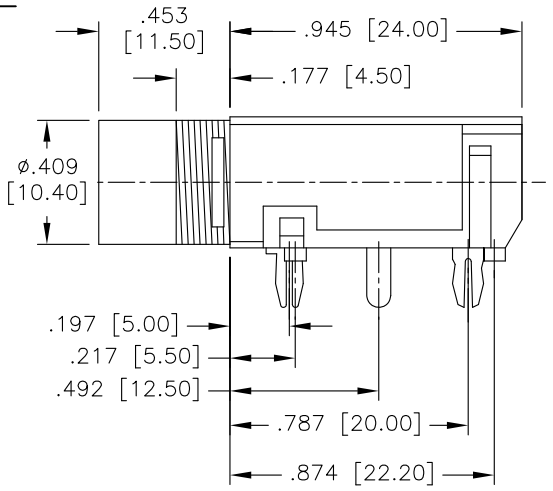

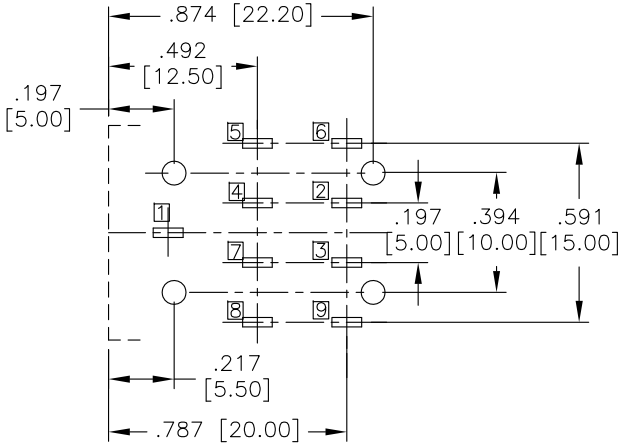

RECOMMENDED PCB LAYOUT
(COPPER–SIDED VIEW)

PART NO.	ASJ–119–A
Schematic	

SPECIFICATIONS:

Material:

Insulator: PBT, rated UL 94V–0

Insulator color: Black

Contacts: Copper Alloy

Plating:

Tin over Copper underplate

Electrical:

Operating voltage: 30 VDC max.

Current rating: 1.0 Amp max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: –65°C to +125°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	12/16/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 6.3 PHONE JACK

SIZE	PART NO.	REV.
X	ASJ-119-A	-

REF:	SCALE:	SHEET
S00002C	NTS	1 OF 1