


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/14/11	


APPROVED: _____

DATE: _____ TITLE: _____

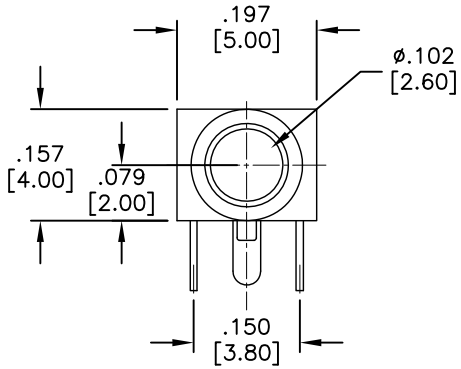


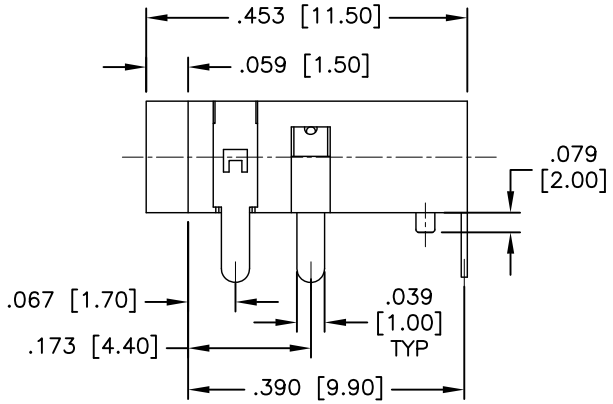

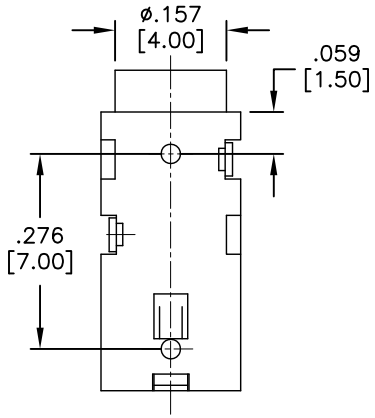

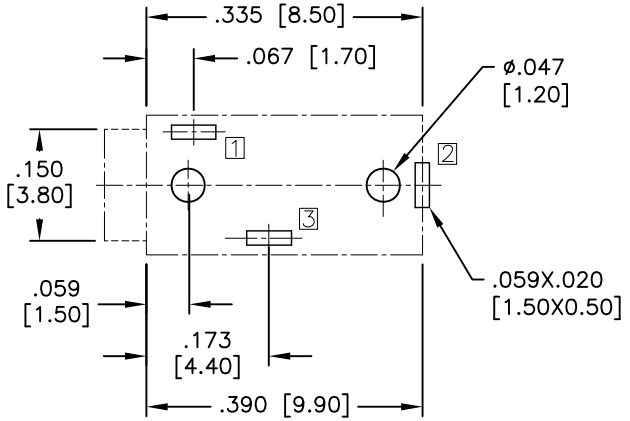

RECOMMENDED PCB LAYOUT
(COMPONENT SIDE)



SPECIFICATIONS:

Material:

Insulator: PA46, rated UL 94V-0

Insulator color: Black

Contacts: Phosphor Bronze

Plating:

Silver over Nickel underplate overall

Electrical:

Operating voltage: 30 VDC max.

Current rating: 0.5 Amp max.

Contact resistance: 30 mohms max. initial

Insulation resistance: 100 Mohms min.

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -30°C to +70°C

Environmental:

Lead free, RoHS Compliant

Recommended soldering temp. 235°C. for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	AY	1/14/11
CHECKED	SC	1/14/11
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: STEREO PHONE JACK, 2.5MM

SIZE	PART NO.	REV.
X	ASJ-135-3	-

REF: S00002C | SCALE: NTS | SHEET 1 OF 1