


Rev	AWO #	Description	Date	Appr
-	11026	RELEASED	1/14/11	

APPROVED: _____


DATE: _____ TITLE: _____

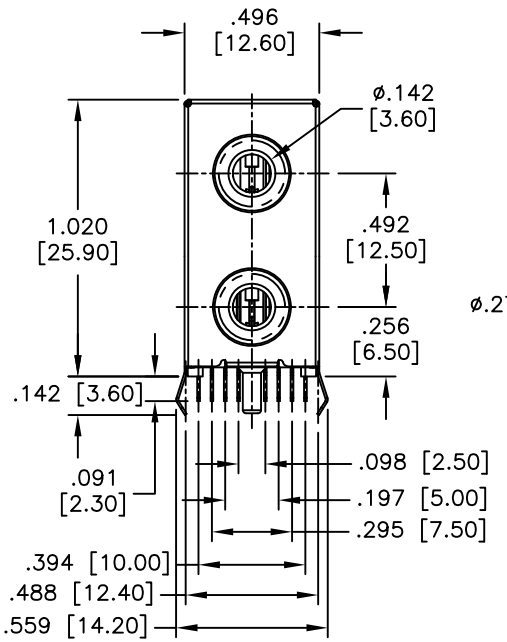


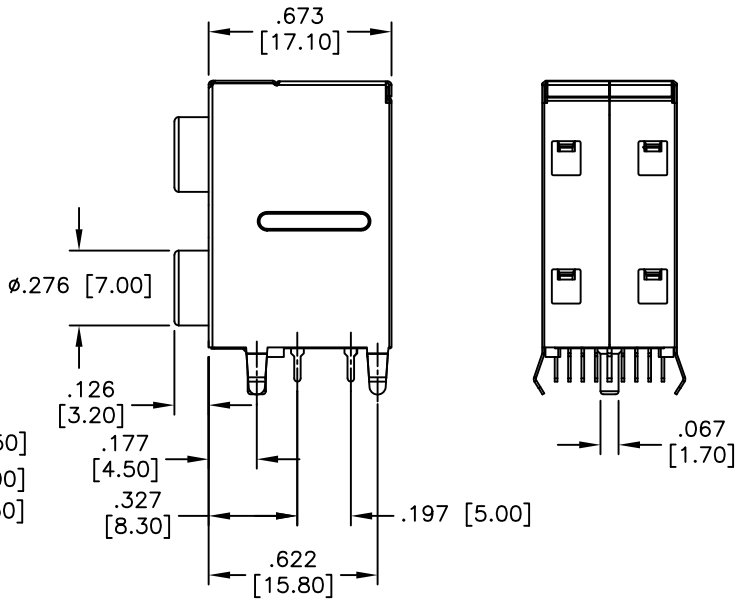


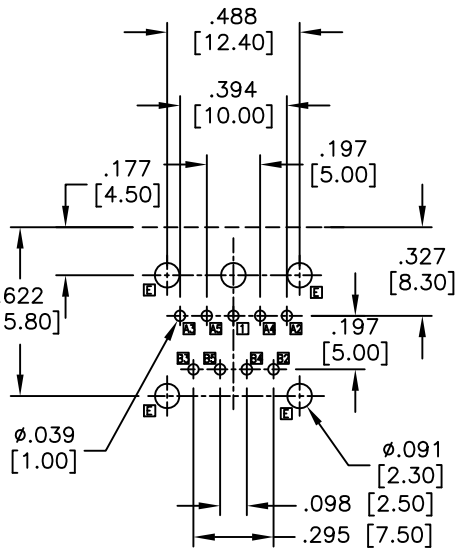

RECOMMENDED PCB LAYOUT





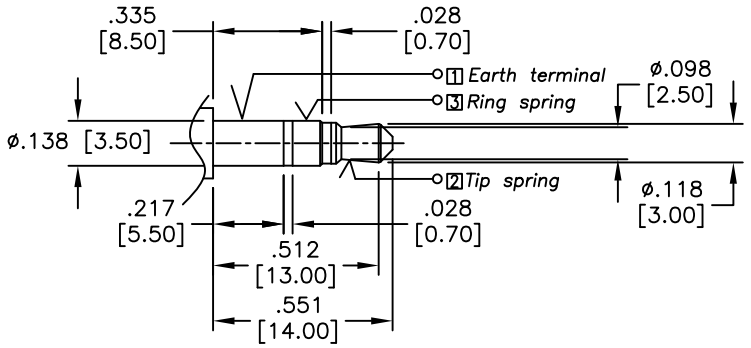

MATCHING PLUG

SPECIFICATIONS:

Material:
Insulator: PBT, glass reinforced, rated UL 94V–0
Insulator color: Black
Contacts: Copper Alloy
Plating:
Gold flash over Nickel underplate overall

Electrical:
Rating: DC 30V, 0.5A
Contact resistance: 30 mohms max
Insulation resistance: 100 Mohms min (500VDC)
Dielectric withstanding voltage: 500 VAC for 1 minute

Environmental:
Temperature Rating:
Operating temperature: –25°C to +80°C
Lead free, RoHS compliant
Recommended soldering temp. 235°C for 5 seconds.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	1/14/11
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: 3.5 DUAL STEREO JACK

SIZE	PART NO.	REV.
X	ASJ-DP-02-5A	-

REF: S00002C | SCALE: NTS | SHEET 1 OF 1