## SPECIFICATIONS


| PARAMETERS | VALUES | UNITS |
|---|---|---|
| RATED VOLTAGE | 1.5 | Vp-p |
| OPERATING VOLTAGE RANGE | 1 ~ 1.7 | Vp-p |
| RATED CURRENT (MAX) | 40 | mA |
| COIL RESISTANCE | 16 ± 2.4 | OHM |
| MINIMUM SPL @ 10 CM | 85 | dBA |
| RESONANT FREQUENCY | 2,800 ± 500 | Hz |
| OPERATING TEMPERATURE | -30 ~ +70 | °C |
| STORAGE TEMPERATURE | -40 ~ +85 | °C |
| HOUSING MATERIAL | PBT | - |
| TERMINAL MATERIAL | Au PLATED COPPER | - |
| WEIGHT | 2 | grams |


THIS DOCUMENT CONTAINS DATA PROPRIETARY TO PROJECTS UNLIMITED, INC. ANY USE OR REPRODUCTION, IN ANY FORM, WITHOUT PRIOR WRITTEN PERMISSION OF PROJECTS UNLIMITED, INC. IS PROHIBITED.

©2003, Projects Unlimited Inc.

## REVISION HISTORY

| LTR | DESCRIPTION | DATE | APPROVED |
|---|---|---|---|
| - | RELEASED FROM ENGINEERING | 8/11/2005 | |
| A | REVISED TO INVENTOR 3-D DRAWING TEMPLATE | 4/8/2008 | B.R. |

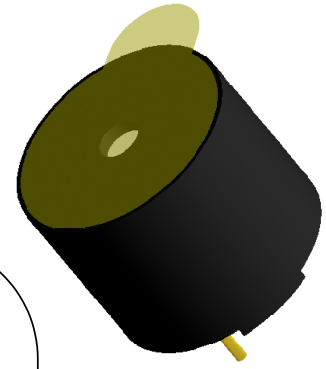

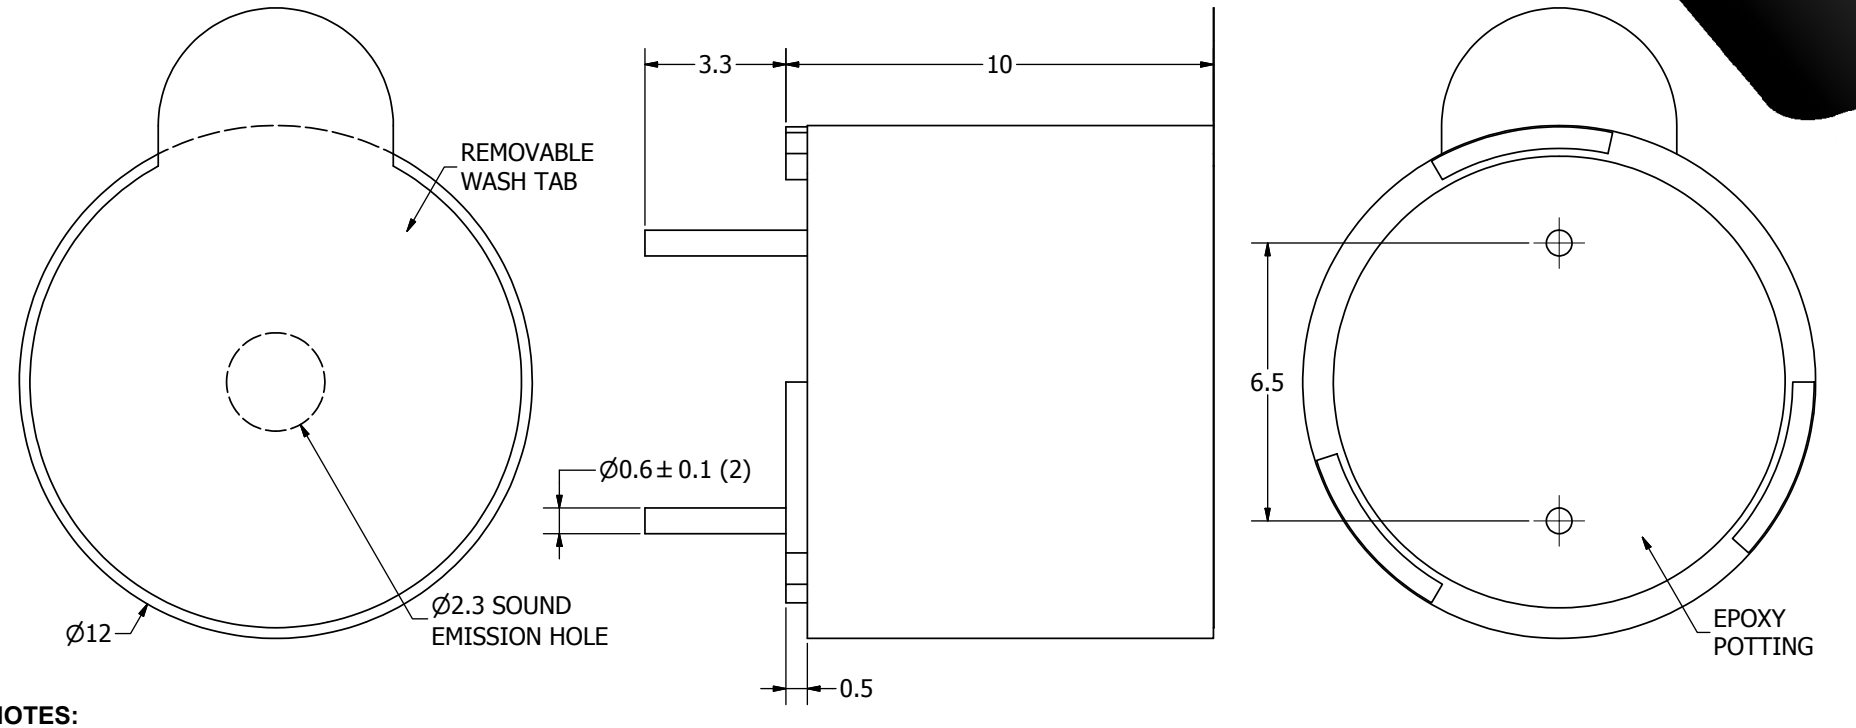


**NOTES:**

1. ALL DIMENSIONS ARE IN MILLIMETERS.
2. SPECIFICATIONS SUBJECT TO CHANGE OR WITHDRAWL WITHOUT NOTICE.
3. THIS PART IS RoHS 2002/95/EC COMPLIANT.

| UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MILLIMETERS, TOLERANCES ARE ±0.5 AND ANGLES ARE ±3°. | SIZE | Designed by | Date | Checked by | Date | Approved by | Date | Drawn Date |
|---|---|---|---|---|---|---|---|---|
| | A3 | J.A.F. | 8/11/2005 | E.P. | 8/11/2005 | B.R. | 8/11/2005 | 4/8/2008 |

AT-1228-TT-R.idw

pui audio inc
a projects unlimited company

# AT-1228-TT-R

Transducer (Electro-Mech)

| Edition | Sheet |
|---|---|
| - | 1 / 1 |