

AT-41486

Up to 6 GHz Low Noise Silicon Bipolar Transistor



Data Sheet

Description


Avago's AT-41486 is a general purpose NPN bipolar transistor that offers excellent high frequency performance. The AT-41486 is housed in a low cost surface mount .085" diameter plastic package. The 4 micron emitter-to-emitter pitch enables this transistor to be used in many different functions. The 14 emitter finger interdigitated geometry yields an intermediate sized transistor with impedances that are easy to match for low noise and moderate power applications. Applications include use in wireless systems as an LNA, gain stage, buffer, oscillator, and mixer. An optimum noise match near 50Ω at 900 MHz, makes this device easy to use as a low noise amplifier.

The AT-41486 bipolar transistor is fabricated using Avago's 10 GHz f_T Self-Aligned-Transistor (SAT) process. The die is nitride passivated for surface protection. Excellent device uniformity, performance and reliability are produced by the use of ion-implantation, self-alignment techniques, and gold metalization in the fabrication of this device.


Features

- Low Noise Figure:
1.4 dB Typical at 1.0 GHz
1.7 dB Typical at 2.0 GHz
- High Associated Gain:
18.0 dB Typical at 1.0 GHz
13.0 dB Typical at 2.0 GHz
- High Gain-Bandwidth Product: 8.0 GHz Typical f_T
- Surface Mount Plastic Package
- Tape-and-Reel Packaging Option Available
- Lead-free Option Available

86 Plastic Package



Pin Connections

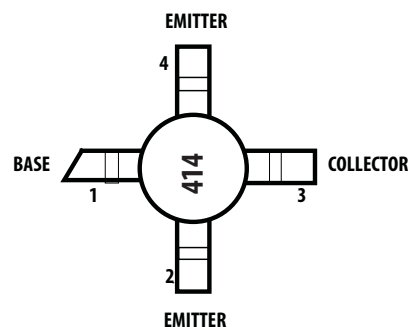

AT-41486 Absolute Maximum Ratings

Symbol	Parameter	Units	Absolute Maximum ^[1]
V_{EBO}	Emitter-Base Voltage	V	1.5
V_{CBO}	Collector-Base Voltage	V	20
V_{CEO}	Collector-Emitter Voltage	V	12
I_C	Collector Current	mA	60
P_T	Power Dissipation ^[2,3]	mW	500
T_J	Junction Temperature	°C	150
T_{STG}	Storage Temperature	°C	-65 to 150

Thermal Resistance^[2,4]:

$$\theta_{jc} = 165^\circ\text{C/W}$$

Notes:

1. Permanent damage may occur if any of these limits are exceeded.
2. $T_{CASE} = 25^\circ\text{C}$.
3. Derate at 6 mW/°C for $T_C > 68^\circ\text{C}$.
4. See MEASUREMENTS section "Thermal Resistance" for more information.

Ordering Information

Part Numbers	No. of Devices	Comments
AT-41486-BLK	100	Bulk
AT-41486-BLKG	100	Bulk
AT-41486-TR1	1000	7" Reel
AT-41486-TR1G	1000	7" Reel
AT-41486-TR2	4000	13" Reel
AT-41486-TR2G	4000	13" Reel

Note: Order part number with a "G" suffix if lead-free option is desired.

Electrical Specifications, $T_A = 25^\circ\text{C}$

Symbol	Parameters and Test Conditions	Units	Min.	Typ.	Max.
$ S_{21E} ^2$	Insertion Power Gain; $V_{CE} = 8\text{ V}$, $I_C = 25\text{ mA}$	f = 1.0 GHz f = 2.0 GHz		17.5 11.5	
$P_{1\text{ dB}}$	Power Output @ 1 dB Gain Compression $V_{CE} = 8\text{ V}$, $I_C = 25\text{ mA}$	f = 2.0 GHz		18.0	
$G_{1\text{ dB}}$	1 dB Compressed Gain; $V_{CE} = 8\text{ V}$, $I_C = 25\text{ mA}$	f = 2.0 GHz		13.5	
NF_0	Optimum Noise Figure; $V_{CE} = 8\text{ V}$, $I_C = 10\text{ mA}$	f = 1.0 GHz f = 2.0 GHz f = 4.0 GHz		1.4 1.7 3.0	1.8
G_A	Gain @ NF_0 ; $V_{CE} = 8\text{ V}$, $I_C = 10\text{ mA}$	f = 1.0 GHz f = 2.0 GHz f = 4.0 GHz	17.0	18.0 13.0 9.0	
f_T	Gain Bandwidth Product; $V_{CE} = 8\text{ V}$, $I_C = 25\text{ mA}$	GHz		8.0	
h_{FE}	Forward Current Transfer Ratio; $V_{CE} = 8\text{ V}$, $I_C = 10\text{ mA}$	—	30	150	270
I_{CBO}	Collector Cutoff Current; $V_{CB} = 8\text{ V}$	μA			0.2
I_{EBO}	Emitter Cutoff Current; $V_{EB} = 1\text{ V}$	μA			1.0
C_{CB}	Collector Base Capacitance ^[1] ; $V_{CB} = 8\text{ V}$, f = 1 MHz	pF		0.25	

Note:

1. For this test, the emitter is grounded.

AT-41486 Typical Performance, $T_A = 25^\circ\text{C}$

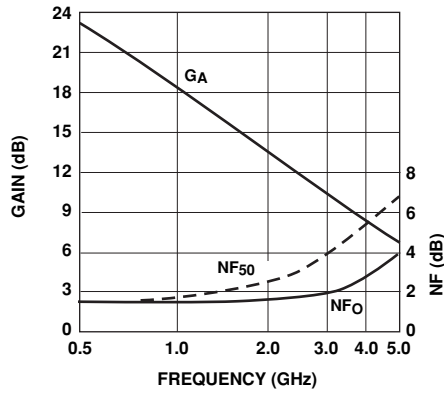


Figure 1. Noise Figure and Associated Gain vs. Frequency. $V_{CE} = 8\text{ V}$, $I_C = 10\text{ mA}$.

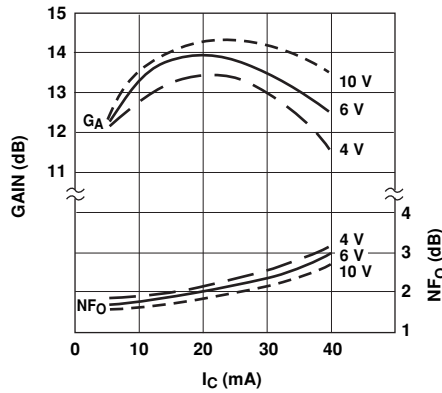


Figure 2. Optimum Noise Figure and Associated Gain vs. Collector Current and Collector Voltage. $f = 2.0\text{ GHz}$.

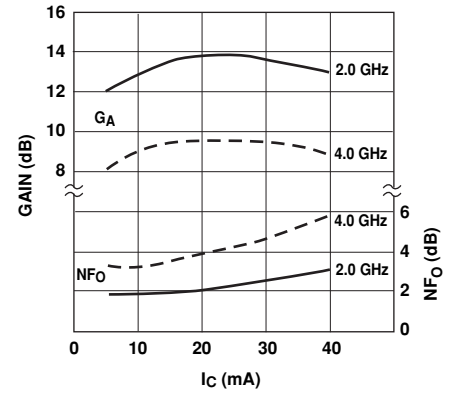


Figure 3. Optimum Noise Figure and Associated Gain vs. Collector Current and Frequency. $V_{CE} = 8\text{ V}$.

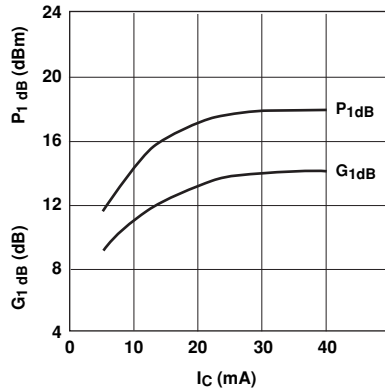


Figure 4. Output Power and 1 dB Compressed Gain vs. Collector Current and Frequency. $V_{CE} = 8\text{ V}$, $f = 2.0\text{ GHz}$.

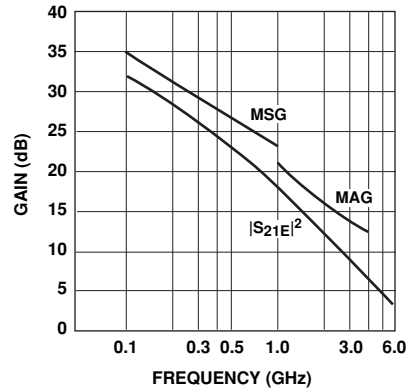


Figure 5. Insertion Power Gain, Maximum Available Gain and Maximum Stable Gain vs. Frequency. $V_{CE} = 8\text{ V}$, $I_C = 25\text{ mA}$.

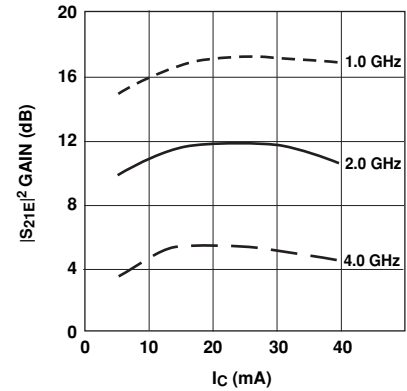


Figure 6. Insertion Power Gain vs. Collector Current and Frequency. $V_{CE} = 8\text{ V}$.

AT-41486 Typical Scattering Parameters, Common Emitter, $Z_0 = 50\ \Omega$, $T_A = 25^\circ\text{C}$, $V_{CE} = 8\text{ V}$, $I_C = 10\text{ mA}$

Freq. GHz	S_{11}			S_{21}			S_{12}		S_{22}	
	Mag.	Ang.	dB	Mag.	Ang.	dB	Mag.	Ang.	Mag.	Ang.
0.1	.74	-38	28.1	25.46	157	-39.6	.011	68	.94	-12
0.5	.59	-127	22.0	12.63	107	-30.2	.031	47	.60	-29
1.0	.56	-168	16.8	6.92	84	-27.7	.041	46	.49	-29
1.5	.57	169	13.5	4.72	69	-26.2	.049	49	.45	-32
2.0	.62	152	11.1	3.61	56	-24.8	.058	43	.42	-39
2.5	.63	142	9.3	2.91	47	-23.4	.068	52	.40	-42
3.0	.64	130	7.6	2.41	37	-22.2	.078	52	.39	-50
3.5	.68	122	6.3	2.06	26	-20.6	.093	51	.37	-60
4.0	.71	113	5.1	1.80	16	-19.5	.106	48	.35	-70
4.5	.74	105	4.0	1.59	7	-18.0	.125	48	.35	-84
5.0	.77	99	3.1	1.42	-4	-17.2	.139	43	.35	-98
5.5	.79	93	2.0	1.27	-13	-16.3	.153	38	.35	-114
6.0	.81	87	1.1	1.13	-22	-15.4	.170	34	.35	-131

AT-41486 Typical Scattering Parameters, Common Emitter, $Z_0 = 50\ \Omega$, $T_A = 25^\circ\text{C}$, $V_{CE} = 8\text{ V}$, $I_C = 25\text{ mA}$


Freq. GHz	S_{11}			S_{21}			S_{12}		S_{22}	
	Mag.	Ang.	dB	Mag.	Ang.	dB	Mag.	Ang.	Mag.	Ang.
0.1	.50	-75	32.0	40.01	142	-41.3	.009	54	.85	-17
0.5	.55	-158	23.2	14.38	97	-34.1	.020	48	.51	-24
1.0	.57	177	17.5	7.50	78	-29.9	.032	61	.46	-24
1.5	.57	161	14.1	5.07	65	-27.3	.043	62	.44	-28
2.0	.59	148	11.5	3.75	53	-24.8	.058	59	.43	-35
2.5	.61	139	9.6	3.02	45	-22.9	.072	58	.40	-41
3.0	.65	128	8.0	2.52	34	-21.6	.083	57	.38	-49
3.5	.70	121	6.7	2.17	24	-20.1	.099	56	.36	-59
4.0	.74	113	5.7	1.92	14	-18.8	.115	52	.34	-72
4.5	.78	107	4.7	1.72	3	-17.6	.132	47	.32	-87
5.0	.78	102	3.7	1.53	-8	-16.6	.149	42	.31	-106
5.5	.78	96	2.7	1.36	-19	-15.4	.169	36	.31	-125
6.0	.76	91	1.6	1.21	-29	-14.5	.188	31	.33	-144

A model for this device is available in the DEVICE MODELS section.

AT-41486 Noise Parameters: $V_{CE} = 8\text{ V}$, $I_C = 10\text{ mA}$

Freq. GHz	NF_0 dB	Γ_{opt}		$R_N/50$
		Mag	Ang	
0.1	1.3	.12	3	0.17
0.5	1.3	.10	16	0.17
1.0	1.4	.04	43	0.16
2.0	1.7	.12	-145	0.16
4.0	3.0	.44	-99	0.40

86 Plastic Package Dimensions

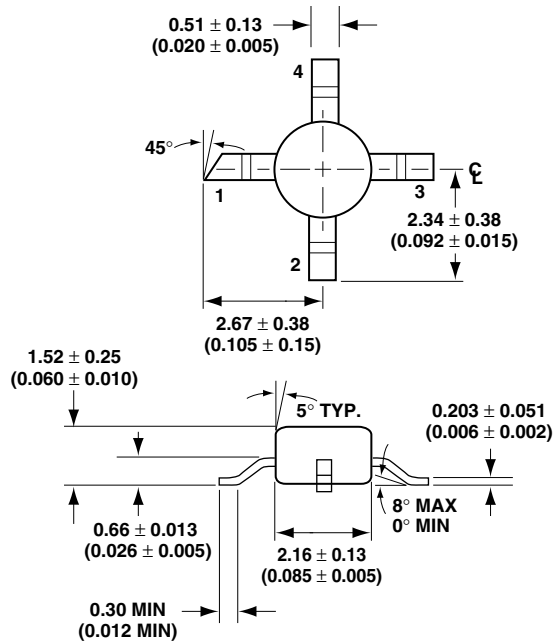

DIMENSIONS ARE IN MILLIMETERS (INCHES)

For product information and a complete list of distributors, please go to our web site: www.avagotech.com

Avago, Avago Technologies, and the A logo are trademarks of Avago Technologies in the United States and other countries. Data subject to change. Copyright © 2005-2012 Avago Technologies. All rights reserved. Obsoletes 5989-2648EN AV02-3624EN - June 14, 2012

Avago
TECHNOLOGIES