


A

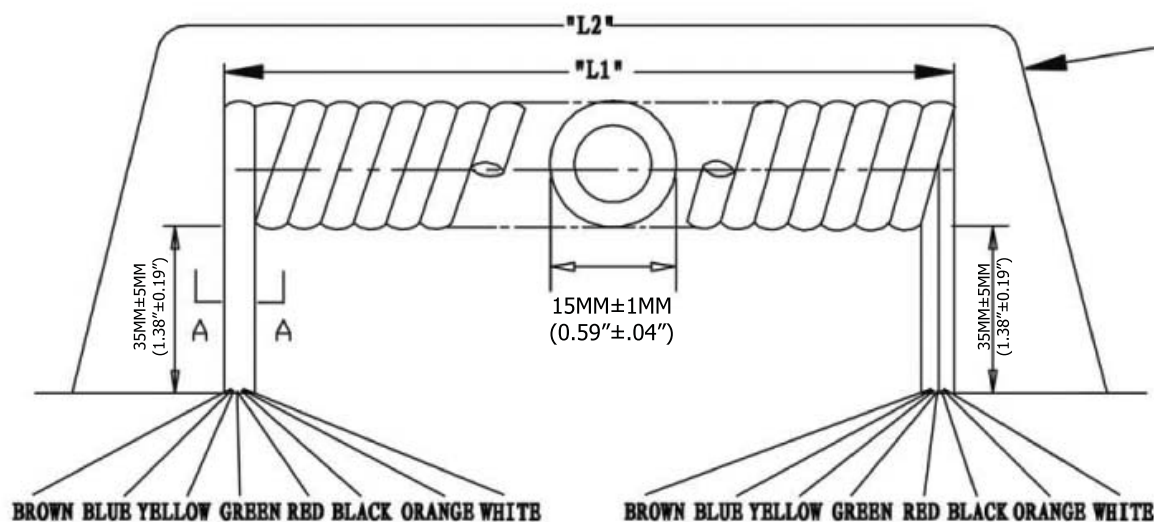

Extended length is with 500g of force

B

C

D

E

F

G


Н

Material:

- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X43): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

Electrical:

- Voltage rating: 30V (DC)

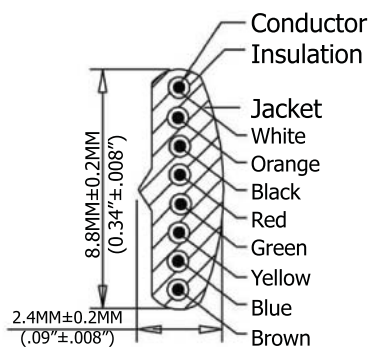

SEC: A=A

Extended Length ("L2")	Typical Retracted Length ("L1")
168.0 Inches - 193.2 Inches	78.0 Inches
4,267.2MM - 4,907.28MM	1,905.0MM

Scale	1:1							Name
TOLERANCE						Drawn	11.21.11	Chappel
X.X	±0.40					Approved		
X.XX	±0.25							
X.XXX	±0.15							
Angle	±3°							
			Modification	Date	Name			

RoHS Complaint

ASSMANN
components

Item No.	Item Description	Unit	Quantity	Rate	Amount
----------	------------------	------	----------	------	--------

AT-K-C-26-8-W/25-R

	Title
--	-------

NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM,
Pre-Cut, 25 Ft., White

Drawing No.

rev00

Replace

	Sheet
--	-------