







MOUNTING PLATE SIZE



SHOWN WITH  
END CAP



SHOWN WITH  
STRAIN RELIEF

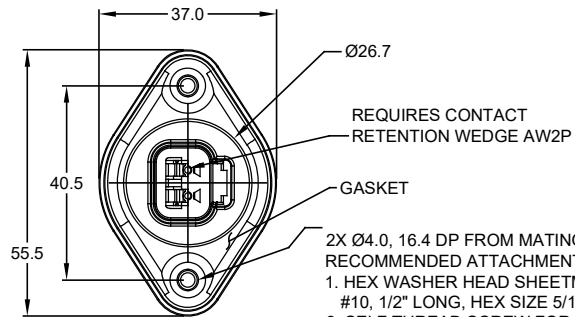

- REQUIRES CONTACT  
RETENTION WEDGE AW2P
- GASKET
- 2X Ø4.0, 16.4 DP FROM MATING SURFACE  
RECOMMENDED ATTACHMENT OPTIONS:  
1. HEX WASHER HEAD SHEETMETAL SCREW,  
#10, 1/2" LONG, HEX SIZE 5/16".  
2. SELF THREAD SCREW FOR PLASTIC SUCH AS ST 4.8

NOTES: UNLESS OTHERWISE SPECIFIED

- MATERIAL:  
HOUSING: THERMOPLASTIC; COLOR: BLACK  
END CAP: THERMOPLASTIC; COLOR: BLACK  
STRAIN RELIEF CAP: THERMOPLASTIC; COLOR: BLACK  
SEALS: SILICONE RUBBER; COLOR: RED
- MODIFICATIONS: FLANGE, GASKET, END CAP (OPT), STRAIN  
RELIEF CAP (OPT), REDUCED DIAMETER SEAL (OPT).
- SPECIFICATIONS:  
3.1 CURRENT RATING: 13 AMPS  
3.2 OPERATING TEMPERATURE: -55°C TO +125°C  
3.3 DIELECTRIC WITHSTANDING VOLTAGE: LESS THAN 2  
MILLIAMPS CURRENT LEAKAGE @ 1500 VOLTS AC.  
3.4 INSULATION RESISTANCE: 1000 MEGOHMS MIN @ 25°C.  
3.5 MOISTURE RESISTANCE: IP67 ( MATED CONDITION )  
3.6 MATING CYCLE DURABILITY: 100 CYCLES  
3.7 RoHS COMPLIANT

- MATING PART: AT06-2S\* PLUG  
(\* = MODIFICATIONS )

- ALL DIMENSIONS ARE FOR REFERENCE USE ONLY.

6 CONTACT SIZE AND REAR SEAL WIRE RANGE:

REDUCED DIAMETER SEAL:

| CONTACT<br>SIZE | MIN. INSUL<br>O.D.   | MAX. INSUL<br>O.D.   | TYPICAL<br>WIRE RANGE |
|-----------------|----------------------|----------------------|-----------------------|
| 16              | 1.35 mm<br>(.053 in) | 3.05 mm<br>(.120 in) | 14 - 20 AWG           |

STANDARD SEAL:

| CONTACT<br>SIZE | MIN. INSUL<br>O.D.   | MAX. INSUL<br>O.D.   | TYPICAL<br>WIRE RANGE |
|-----------------|----------------------|----------------------|-----------------------|
| 16              | 2.24 mm<br>(.088 in) | 3.68 mm<br>(.145 in) | 14 - 20 AWG           |

| REVISIONS |     |                          |         |     |      |
|-----------|-----|--------------------------|---------|-----|------|
| REV       | ECO | DESCRIPTION              | DATE    | BY  | APPR |
| A1        | -   | RELEASED CHARTED DRAWING | 21MAR18 | JAH | -    |

| MODIFICATIONS |              |         |               |
|---------------|--------------|---------|---------------|
| PART NUMBER   | SEAL         | END CAP | STRAIN RELIEF |
| AT04-2P-PM11  | STANDARD     | NO      | NO            |
| AT04-2P-PM12  | REDUCED DIA. | NO      | NO            |
| AT04-2P-PM13  | STANDARD     | YES     | NO            |
| AT04-2P-PM14  | REDUCED DIA. | YES     | NO            |
| AT04-2P-PM15  | STANDARD     | NO      | YES           |
| AT04-2P-PM16  | REDUCED DIA. | NO      | YES           |

|                                                                                                                                                                                    |  |                                                                                                                                                                                                                                                                      |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| AT04-2P-PM1X                                                                                                                                                                       |  |                                                                                                                                                                                                                                                                      |  |
| PART NUMBER                                                                                                                                                                        |  | DESCRIPTION                                                                                                                                                                                                                                                          |  |
| QUANTITY                                                                                                                                                                           |  | ITEM                                                                                                                                                                                                                                                                 |  |
| UNLESS OTHERWISE SPECIFIED:<br>1) All dimensions are in metric (mm).<br>2) Tolerances are as follows:<br>1 PL DEC ±0.30<br>2 PL DEC ±0.15<br>3 PL DEC ±0.08<br>3) Note reference = |  | SIGNATURES<br>DRAWN: J. HEAD<br>CHECKED:<br>ENGINEER:<br>APPROVAL:<br>DATE<br>21MAR2018                                                                                                                                                                              |  |
| MATERIAL SPECIFICATIONS:                                                                                                                                                           |  | CUSTOMER:                                                                                                                                                                                                                                                            |  |
| PROCESS SPECIFICATIONS:                                                                                                                                                            |  | THIS DRAWING IS SUPPLIED FOR INFORMATION ONLY. DESIGN FEATURES, SPECIFICATIONS AND PERFORMANCE DATA SHOWN HEREON ARE THE PROPERTY OF THE AMPHENOL CORPORATION. NO RIGHTS OF REPRODUCTION ARE IMPLIED. ALL DIMENSIONS ARE SUBJECT TO NORMAL MANUFACTURING VARIATIONS. |  |
| NEXT ASSY:                                                                                                                                                                         |  | SCALE: NONE                                                                                                                                                                                                                                                          |  |
| SIZE: B                                                                                                                                                                            |  | TYPE: C                                                                                                                                                                                                                                                              |  |
| DWG NO: AT04-2P-PM1X                                                                                                                                                               |  | REVISION: A1                                                                                                                                                                                                                                                         |  |
| SHEET 1                                                                                                                                                                            |  | OF 1                                                                                                                                                                                                                                                                 |  |

## AT Series™ - Contact Size 16 Options

| Machined Contacts, Sockets & Pins |                                        |      |       |          |
|-----------------------------------|----------------------------------------|------|-------|----------|
| Part Number                       | Description                            | Size | AWG   | Type     |
| AT60-215-1631                     | Male Contact - Pin, Gold-plated        | 16   | 14    | Machined |
| AT62-209-1631                     | Female Contact - Socket, Gold-plated   | 16   | 14    | Machined |
| AT60-215-16141                    | Male Contact - Pin, Nickel-plated      | 16   | 14    | Machined |
| AT62-209-16141                    | Female Contact - Socket, Nickel-plated | 16   | 14    | Machined |
| AT60-202-1631                     | Male Contact - Pin, Gold-plated        | 16   | 16-20 | Machined |
| AT62-201-1631                     | Female Contact - Socket, Gold-plated   | 16   | 16-20 | Machined |
| AT60-202-16141                    | Male Contact - Pin, Nickel-plated      | 16   | 16-20 | Machined |
| AT62-201-16141                    | Female Contact - Socket, Nickel-plated | 16   | 16-20 | Machined |
| AT60-202-1631-22                  | Male Contact - Pin, Gold-plated        | 16   | 22-24 | Machined |
| AT62-201-1631-22                  | Female Contact - Socket, Gold-plated   | 16   | 22-24 | Machined |
| AT60-202-16141-22                 | Male Contact - Pin, Nickel-plated      | 16   | 22-24 | Machined |
| AT62-201-16141-22                 | Female Contact - Socket, Nickel-plated | 16   | 22-24 | Machined |

| Tooling - Machined Contacts                                                       |             |                                                                   |
|-----------------------------------------------------------------------------------|-------------|-------------------------------------------------------------------|
| Part                                                                              | Part Number | Description                                                       |
|  | CA-5D12     | Universal Hand Crimp Tool, Size 12/16/20 (Machined contacts only) |
|  | CA-5E12     | Pneumatic Crimp Tool, Size 12/16/20 (Machined contacts only)      |

| Contact Removal Tools                                                               |               |                                                     |
|-------------------------------------------------------------------------------------|---------------|-----------------------------------------------------|
| Part                                                                                | Part Number   | Description                                         |
|  | ATRT-100      | Used for removal of contacts for A Series™ products |
|  | AT11-310-1605 | Contact Removal Tool, Plastic, Size 16              |
|  | A114017       | Sealing Plug, Size 16, White                        |

| Stamped & Formed Contacts, Sockets & Pins |                                        |      |       |                  |
|-------------------------------------------|----------------------------------------|------|-------|------------------|
| Part Number                               | Description                            | Size | AWG   | Type             |
| AT60-14-0144                              | Male Contact - Pin, Gold-plated        | 16   | 14-16 | Stamped & Formed |
| AT62-14-0144                              | Female Contact - Socket, Gold-plated   | 16   | 14-16 | Stamped & Formed |
| AT60-14-0122                              | Male Contact - Pin, Nickel-plated      | 16   | 14-16 | Stamped & Formed |
| AT62-14-0122                              | Female Contact - Socket, Nickel-plated | 16   | 14-16 | Stamped & Formed |
| AT60-16-0144                              | Male Contact - Pin, Gold-plated        | 16   | 16-18 | Stamped & Formed |
| AT62-16-0144                              | Female Contact - Socket, Gold-plated   | 16   | 16-18 | Stamped & Formed |
| AT60-16-0122                              | Male Contact - Pin, Nickel-plated      | 16   | 16-18 | Stamped & Formed |
| AT62-16-0122                              | Female Contact - Socket, Nickel-plated | 16   | 16-18 | Stamped & Formed |
| AT60-16-0644                              | Male Contact - Pin, Gold-plated        | 16   | 18-20 | Stamped & Formed |
| AT62-16-0644                              | Female Contact - Socket, Gold-plated   | 16   | 18-20 | Stamped & Formed |
| AT60-16-0622                              | Male Contact - Pin, Nickel-plated      | 16   | 18-20 | Stamped & Formed |
| AT62-16-0622                              | Female Contact - Socket, Nickel-plated | 16   | 18-20 | Stamped & Formed |
| AT60-16-0844                              | Male Contact - Pin, Gold-plated        | 16   | 20-22 | Stamped & Formed |
| AT62-16-0844                              | Female Contact - Socket, Gold-plated   | 16   | 20-22 | Stamped & Formed |
| AT60-16-0822                              | Male Contact - Pin, Nickel-plated      | 16   | 20-22 | Stamped & Formed |
| AT62-16-0822                              | Female Contact - Socket, Nickel-plated | 16   | 20-22 | Stamped & Formed |

| Tooling - Stamped & Formed Contacts                                                   |             |                                                          |
|---------------------------------------------------------------------------------------|-------------|----------------------------------------------------------|
| Part                                                                                  | Part Number | Description                                              |
|   | MFX-3950    | Crimp Die - Size 16, 18-20AWG (\$&F contacts only)       |
|                                                                                       | MFX-3953    | Crimp Die - Size 16, 16-18AWG (\$&F contacts only)       |
|                                                                                       | MFX-3975    | Crimp Die - Size 16, 14-16AWG (\$&F contacts only)       |
|                                                                                       | MFX-3990    | Crimp Die - Size 16, 20-22AWG (\$&F contacts only)       |
|  | ATT-16-00   | Hand Crimp Tool - Size 16, 14-16AWG (\$&F contacts only) |
|                                                                                       | ATT-16-01   | Hand Crimp Tool - Size 16, 18-20AWG (\$&F contacts only) |
|                                                                                       | ATT-1612-03 | Hand Crimp Tool - Size 16, 20-22AWG (\$&F contacts only) |

**Amphenol Sine Systems**  
 44724 Morley Drive  
 Clinton Township, MI 48036 USA  
[www.amphenol-sine.com](http://www.amphenol-sine.com)  
 09/2021