


## Features

- 3.0V to 5.5V Operating Range
- Advanced, High-speed, Electrically-erasable Programmable Logic Device
  - Superset of 22V10
  - Enhanced Logic Flexibility
  - Architecturally Compatible with ATF750B and ATF750 Software and Hardware
- D- or T-type Flip-flop
- Product Term or Direct Input Pin Clocking
- 10 ns Maximum Pin-to-pin Delay with 5V Operation
- 15 ns Maximum Pin-to-pin Delay with 3V Operation
- Highest Density Programmable Logic Available in 24-pin Package
  - Advanced Electrically-erasable Technology
  - Reprogrammable
  - 100% Tested
- Increased Logic Flexibility
  - 42 Array Inputs, 20 Sum Terms and 20 Flip-flops
- Enhanced Output Logic Flexibility
  - All 20 Flip-flops Feed Back Internally
  - 10 Flip-flops are also Available as Outputs
- Programmable Pin-keeper Circuits
- Dual-in-line and Surface Mount Package in Standard Pinouts
- Commercial and Industrial Temperature Ranges
- 20-year Data Retention
- 2000V ESD Protection
- 1000 Erase/Write Cycles
- Green Package Options (Pb/Halide-free/RoHS Compliant) Available

## 1. Block Diagram

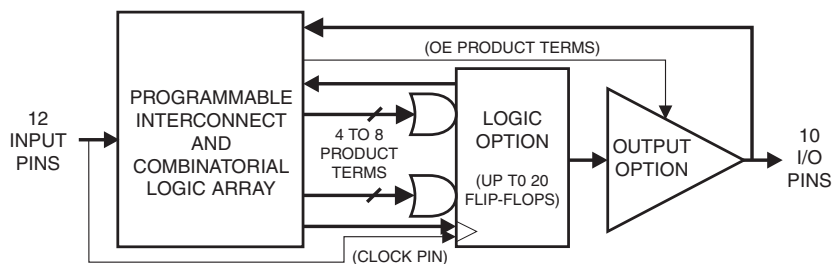

## 2. Description

The Atmel® “750” architecture is twice as powerful as most other 24-pin programmable logic devices. Increased product terms, sum terms, flip-flops and output logic configurations translate into more usable gates. High-speed logic and uniform, predictable delays guarantee fast in-system performance. The ATF750LVC is a high-performance CMOS (electrically-erasable) complex programmable logic device (CPLD) that utilizes Atmel’s proven electrically-erasable technology.



## High-speed Complex Programmable Logic Device

## ATF750LVC

| Pin Name | Function               |
|----------|------------------------|
| CLK      | Clock                  |
| IN       | Logic Inputs           |
| I/O      | Bi-directional Buffers |
| GND      | Ground                 |
| VCC      | 3V to 5.5V Supply      |

| Pin Number | Function |
|------------|----------|
| 1          | IN       |
| 2          | IN       |
| 3          | IN       |
| 4          | IN       |
| 5          | IN       |
| 6          | IN       |
| 7          | IN       |
| 8          | IN       |
| 9          | IN       |
| 10         | IN       |
| 11         | IN       |
| 12         | GND      |
| 13         | IN       |
| 14         | IN       |
| 15         | IN       |
| 16         | I/O      |
| 17         | I/O      |
| 18         | I/O      |
| 19         | I/O      |
| 20         | I/O      |
| 21         | I/O      |
| 22         | I/O      |
| 23         | I/O      |
| 24         | VCC      |

## 4. Absolute Maximum Ratings\*

|                                                                            |                                |
|----------------------------------------------------------------------------|--------------------------------|
| Temperature Under Bias.....                                                | -40°C to +85°C                 |
| Storage Temperature .....                                                  | -65°C to +150°C                |
| Voltage on Any Pin with<br>Respect to Ground .....                         | -2.0V to +7V <sup>(1)</sup>    |
| Voltage on Input Pins<br>with Respect to Ground<br>During Programming..... | -2.0V to +14.0V <sup>(1)</sup> |
| Programming Voltage with<br>Respect to Ground .....                        | -2.0V to +14.0V <sup>(1)</sup> |


**\*NOTICE:** Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

**Note:** 1. Minimum voltage is -0.6V DC, which may undershoot to -2.0V for pulses of less than 20 ns. Maximum output pin voltage is  $V_{CC} + 0.75V$  DC, which may overshoot to 7V for pulses of less than 20 ns with VCC at VCC max.



## 5. DC and AC Operating Conditions

|                                 | Commercial  | Industrial    |
|---------------------------------|-------------|---------------|
| Operating Temperature (Ambient) | 0°C - 70°C  | -40°C - +85°C |
| V <sub>CC</sub> Power Supply    | 3.0 - 5.25V | 3.0 - 5.5V    |

## 6. Clock Mux

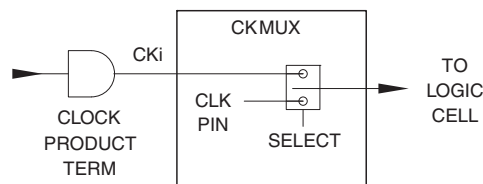

## 7. Output Options

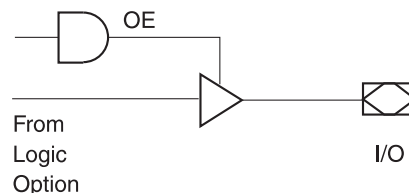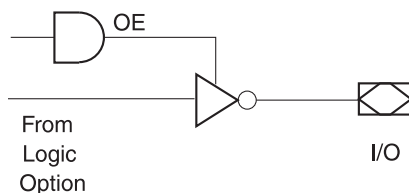

## 8. Bus-friendly Pin-keeper Input and I/Os

All input and I/O pins on the ATF750LVC have programmable “pin-keeper” circuits. If activated, when any pin is driven high or low and then subsequently left floating, it will stay at that previous high or low level.


This circuitry prevents unused input and I/O lines from floating to intermediate voltage levels, which cause unnecessary power consumption and system noise. The keeper circuits eliminate the need for external pull-up resistors and eliminate their DC power consumption.

Enabling or disabling of the pin-keeper circuits is controlled by the device type chosen in the logic compiler device selection menu. Please refer to the software compiler table for more details. Once the pin-keeper circuits are disabled, normal termination procedures are required for unused inputs and I/Os.


**Table 1.** Software Compiler Mode Selection

| Synario         | WinCupl  | Pin-keeper Circuit |
|-----------------|----------|--------------------|
| ATF750LVC       | V750C    | Disabled           |
| ATF750LVC (PPK) | V750CPPK | Enabled            |

## 9. Input Diagram

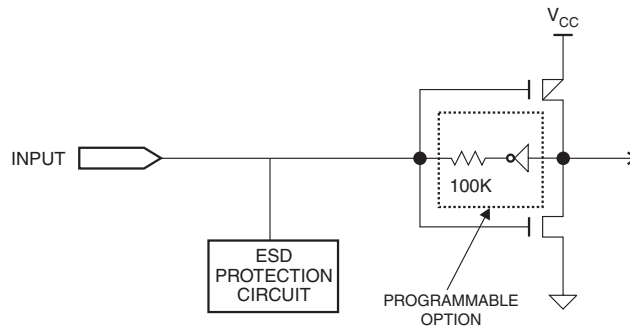

## 10. I/O Diagram

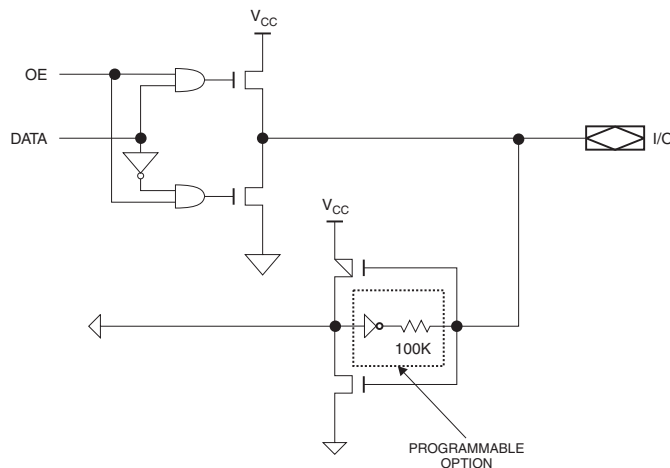


## 11. DC Characteristics


| Symbol                            | Parameter                     | Condition                                                                       |                           |            | Min        | Typ | Max                    | Units |
|-----------------------------------|-------------------------------|---------------------------------------------------------------------------------|---------------------------|------------|------------|-----|------------------------|-------|
| V <sub>CC</sub>                   | Power Supply Voltage          | 3V Operation                                                                    |                           |            | 3.0        | 3.3 | 3.6                    | V     |
|                                   |                               | 5V Operation                                                                    | Com.                      |            | 4.75       | 5.0 | 5.25                   | V     |
|                                   |                               |                                                                                 | Ind.                      |            | 4.5        | 5.0 | 5.5                    | V     |
| I <sub>LI</sub>                   | Input Load Current            | V <sub>IN</sub> = -0.1V to V <sub>CC</sub> + 1V                                 |                           |            |            |     | 10                     | μA    |
| I <sub>LO</sub>                   | Output Leakage Current        | V <sub>OUT</sub> = -0.1V to V <sub>CC</sub> + 0.1V                              |                           |            |            |     | 10                     | μA    |
| I <sub>CC</sub>                   | Power Supply Current, Standby | V <sub>CC</sub> = 3.6V<br>V <sub>IN</sub> = 3.6V<br>Outputs Open                | C-15                      | Com.       |            | 65  | 90                     | mA    |
|                                   |                               |                                                                                 |                           | Ind.       |            | 70  | 100                    | mA    |
| I <sub>CC</sub>                   | Power Supply Current, Standby | V <sub>CC</sub> = 5.25V<br>V <sub>IN</sub> = 5.25V<br>Outputs Open              | C-15                      | Com.       |            | 100 | 180                    | mA    |
|                                   |                               |                                                                                 |                           | Ind.       |            | 110 | 190                    | mA    |
| I <sub>OS</sub> <sup>(1)(2)</sup> | Output Short Circuit Current  | V <sub>OUT</sub> = 0.5V                                                         |                           |            |            |     | -120                   | mA    |
| V <sub>IL</sub>                   | Input Low Voltage             | Min ≤ V <sub>CC</sub> ≤ Max                                                     |                           |            | -0.6       |     | 0.8                    | V     |
| V <sub>IH</sub>                   | Input High Voltage            |                                                                                 |                           |            | 2.0        |     | V <sub>CC</sub> + 0.75 | V     |
| V <sub>OL</sub>                   | Output Low Voltage            | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> ,<br>V <sub>CC</sub> = Min | I <sub>OL</sub> = 16 mA   | Com., Ind. |            |     | 0.5                    | V     |
|                                   |                               |                                                                                 | I <sub>OL</sub> = 12 mA   | Mil.       |            |     | 0.5                    | V     |
|                                   |                               |                                                                                 | I <sub>OL</sub> = 24 mA   | Com.       |            |     | 0.8                    | V     |
| V <sub>OH</sub>                   | Output High Voltage           | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> ,<br>V <sub>CC</sub> = Min | I <sub>OH</sub> = -100 μA |            | VCC - 0.3V |     |                        | V     |
|                                   |                               |                                                                                 | I <sub>OH</sub> = -2.0 mA |            | 2.4        |     |                        | V     |

Notes: 1. Not more than one output at a time should be shorted. Duration of short circuit test should not exceed 30 sec.  
2. This test is performed at initial characterisation only.


## 12. Input Test Waveforms and Measurement Levels

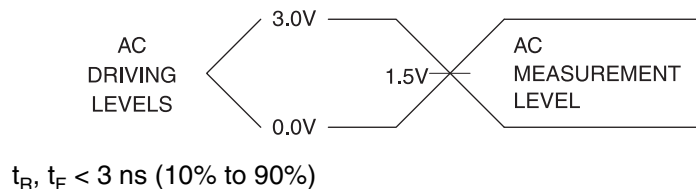

## 13. Output Test Load



## 14. AC Waveforms, Product Term Clock<sup>(1)</sup>

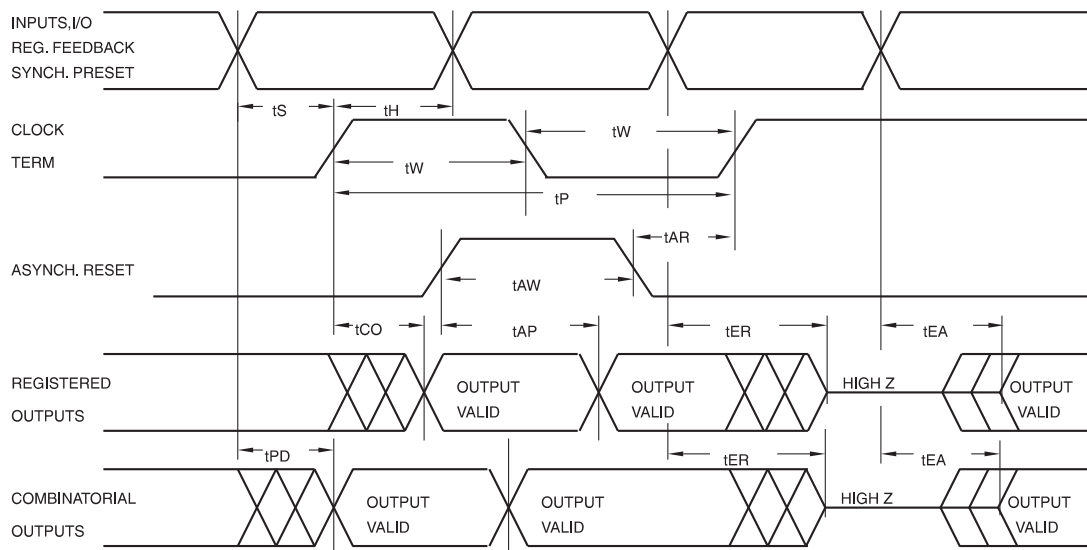


Note: 1. Timing measurement reference is 1.5V. Input AC driving levels are 0.0V and 3.0V, unless otherwise specified.

## 15. AC Characteristics, Product Term Clock<sup>(1)</sup>

| Symbol    | Parameter                                     | -15 (5V Operation) |     | -15 (3V Operation) |     | Units |
|-----------|-----------------------------------------------|--------------------|-----|--------------------|-----|-------|
|           |                                               | Min                | Max | Min                | Max |       |
| $t_{PD}$  | Input or Feedback to Non-registered Output    |                    | 10  |                    | 15  | ns    |
| $t_{EA}$  | Input to Output Enable                        |                    | 10  |                    | 15  | ns    |
| $t_{ER}$  | Input to Output Disable                       |                    | 10  |                    | 15  | ns    |
| $t_{CO}$  | Clock to Output                               | 4                  | 10  | 5                  | 12  | ns    |
| $t_{CF}$  | Clock to Feedback                             | 4                  | 7.5 | 5                  | 9   | ns    |
| $t_S$     | Input Setup Time                              | 4                  |     | 8                  |     | ns    |
| $t_{SF}$  | Feedback Setup Time                           | 4                  |     | 7                  |     | ns    |
| $t_H$     | Hold Time                                     | 2                  |     | 5                  |     | ns    |
| $t_P$     | Clock Period                                  | 11                 |     | 14                 |     | ns    |
| $t_W$     | Clock Width                                   | 5.5                |     | 7                  |     | ns    |
| $f_{MAX}$ | External Feedback $1/(t_S + t_{CO})$          |                    | 71  |                    | 50  | MHz   |
|           | Internal Feedback $1/(t_{SF} + t_{CF})$       |                    | 86  |                    | 62  | MHz   |
|           | No Feedback $1/(t_P)$                         |                    | 90  |                    | 71  | MHz   |
| $t_{AW}$  | Asynchronous Reset Width                      | 10                 |     | 15                 |     | ns    |
| $t_{AR}$  | Asynchronous Reset Recovery Time              | 10                 |     | 15                 |     | ns    |
| $t_{AP}$  | Asynchronous Reset to Registered Output Reset |                    | 12  |                    | 15  | ns    |
| $t_{SP}$  | Setup Time, Synchronous Preset                | 7                  |     | 8                  |     | ns    |

Note: 1. See ordering information for valid part numbers.

## 16. AC Waveforms, Input Pin Clock<sup>(1)</sup>

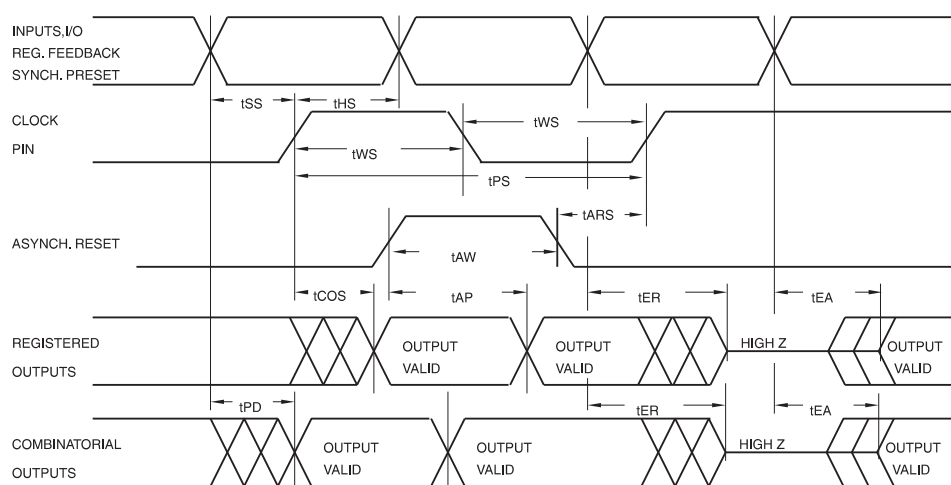


Note: 1. Timing measurement reference is 1.5V. Input AC driving levels are 0.0V and 3.0V, unless otherwise specified.


## 17. AC Characteristics, Input Pin Clock

| Symbol     | Parameter                                     | -15 (5V Operation) |     | -15 (3V Operation) |     | Units |
|------------|-----------------------------------------------|--------------------|-----|--------------------|-----|-------|
|            |                                               | Min                | Max | Min                | Max |       |
| $t_{PD}$   | Input or Feedback to Non-registered Output    |                    | 10  |                    | 15  | ns    |
| $t_{EA}$   | Input to Output Enable                        |                    | 10  |                    | 15  | ns    |
| $t_{ER}$   | Input to Output Disable                       |                    | 10  |                    | 15  | ns    |
| $t_{COS}$  | Clock to Output                               | 0                  | 7   | 0                  | 10  | ns    |
| $t_{CFS}$  | Clock to Feedback                             | 0                  | 5   | 0                  | 5.5 | ns    |
| $t_{SS}$   | Input Setup Time                              | 5                  |     | 8                  |     | ns    |
| $t_{SFS}$  | Feedback Setup Time                           | 5                  |     | 7                  |     | ns    |
| $t_{HS}$   | Hold Time                                     | 0                  |     | 5                  |     | ns    |
| $t_{PS}$   | Clock Period                                  | 10                 |     | 14                 |     | ns    |
| $t_{WS}$   | Clock Width                                   | 5                  |     | 7                  |     | ns    |
| $f_{MAXS}$ | External Feedback $1/t_{SS} + t_{COS}$        |                    | 83  |                    | 55  | MHz   |
|            | Internal Feedback $1/t_{SFS} + t_{CFS}$       |                    | 100 |                    | 80  | MHz   |
|            | No Feedback $1/t_{PS}$                        |                    | 100 |                    | 83  | MHz   |
| $t_{AW}$   | Asynchronous Reset Width                      | 10                 |     | 15                 |     | ns    |
| $t_{ARS}$  | Asynchronous Reset Recovery Time              | 10                 |     | 15                 |     | ns    |
| $t_{AP}$   | Asynchronous Reset to Registered Output Reset |                    | 10  |                    | 15  | ns    |
| $t_{SPS}$  | Setup Time, Synchronous Preset                | 5                  |     | 11                 |     | ns    |

## 18. Functional Logic Diagram ATF750LVC, Upper Half

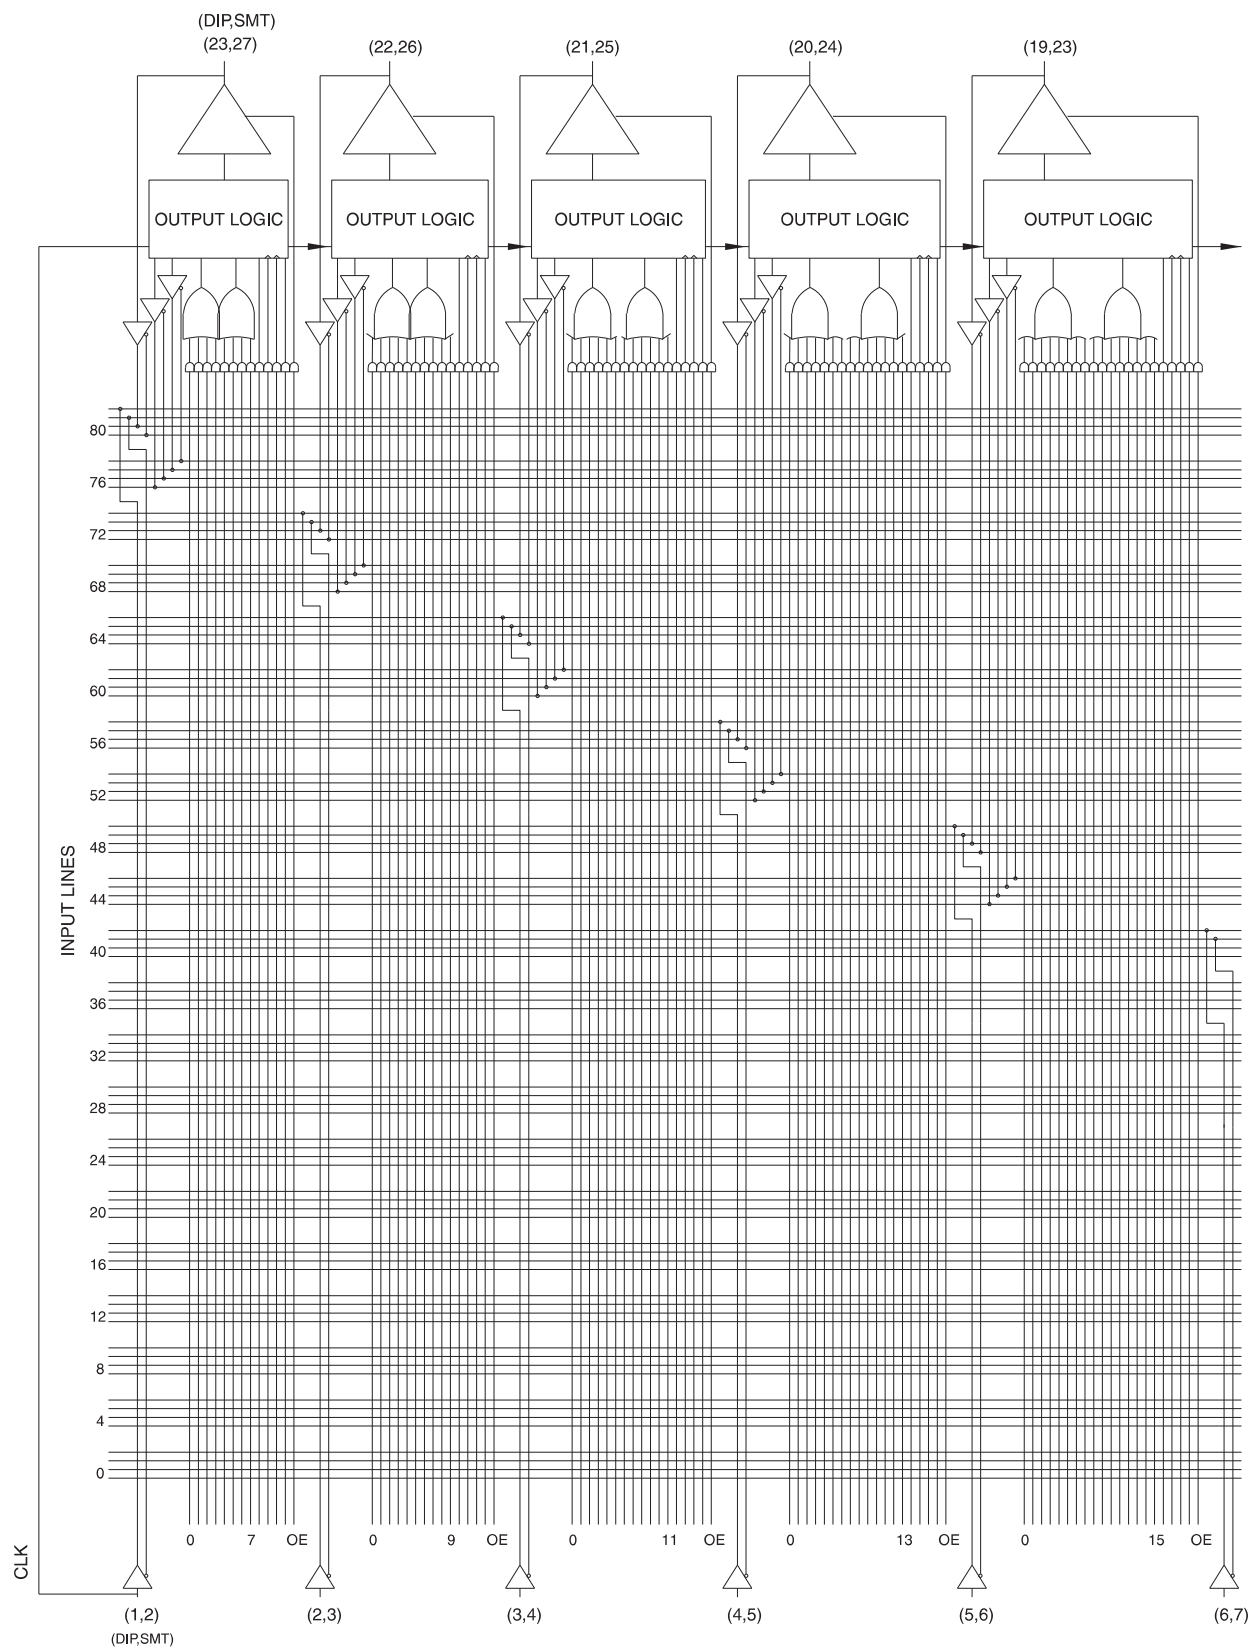

## 19. Functional Logic Diagram ATF750LVC, Lower Half

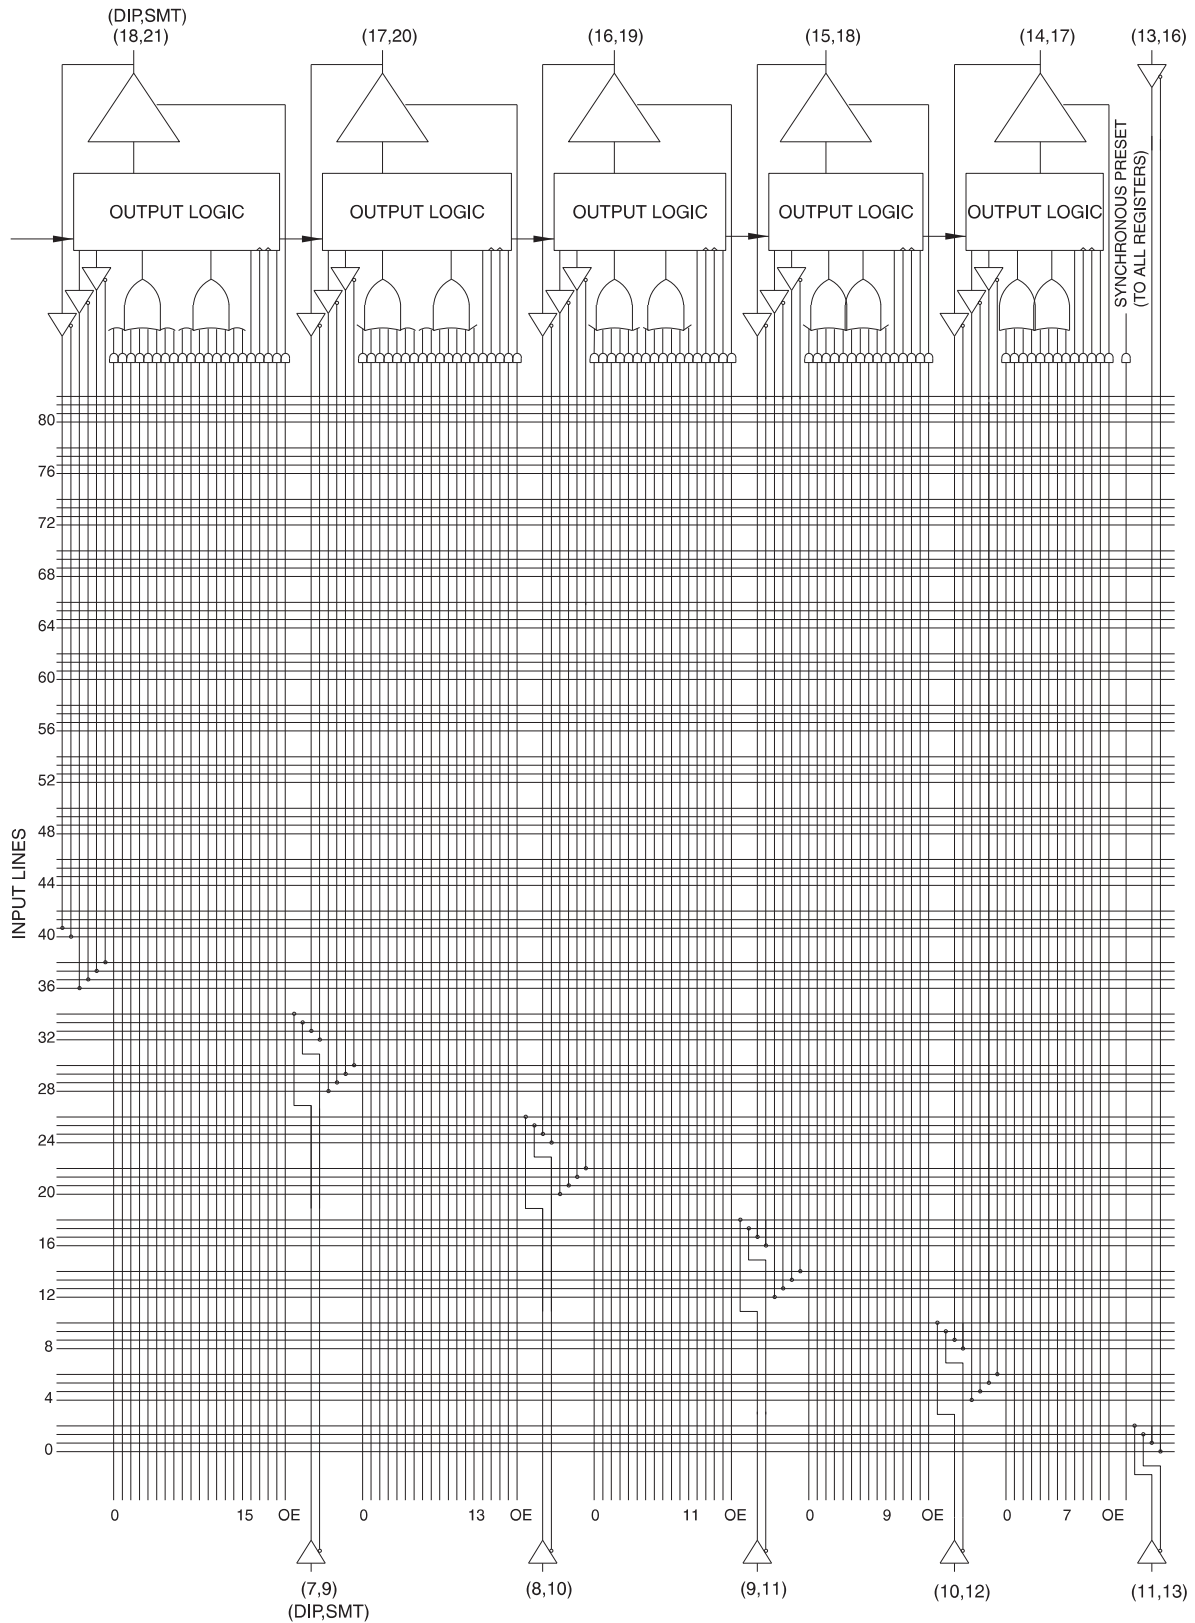

## 20. Using the ATF750LVC's Many Advanced Features

The ATF750LVC's advanced flexibility packs more usable gates into 24-pins than any other logic device. The ATF750LVCs start with the popular 22V10 architecture, and add several enhanced features:

- **Selectable D- and T-type Registers**

Each ATF750LVC flip-flop can be individually configured as either D- or T-type. Using the T-type configuration, JK and SR flip-flops are also easily created. These options allow more efficient product term usage.

- **Selectable Asynchronous Clocks**

Each of the ATF750LVC's flip-flops may be clocked by its own clock product term or directly from Pin 1 (SMD Lead 2). This removes the constraint that all registers must use the same clock. Buried state machines, counters and registers can all coexist in one device while running on separate clocks. Individual flip-flop clock source selection further allows mixing higher performance pin clocking and flexible product term clocking within one design.

- **A Full Bank of Ten More Registers**

The ATF750LVC provides two flip-flops per output logic cell for a total of 20. Each register has its own sum term, its own reset term and its own clock term.

- **Independent I/O Pin and Feedback Paths**

Each I/O pin on the ATF750LVC has a dedicated input path. Each of the 20 registers has its own feedback terms into the array as well. This feature, combined with individual product terms for each I/O's output enable, facilitates true bi-directional I/O design.

## 21. Synchronous Preset and Asynchronous Reset

One synchronous preset line is provided for all 20 registers in the ATF750LVC. The appropriate input signals to cause the internal clocks to go to a high state must be received during a synchronous preset. Appropriate setup and hold times must be met, as shown in the switching waveform diagram.


An individual asynchronous reset line is provided for each of the 20 flip-flops. Both master and slave halves of the flip-flops are reset when the input signals received force the internal resets high.

## 22. Security Fuse Usage


A single fuse is provided to prevent unauthorized copying of the ATF750LVC fuse patterns. Once the security fuse is programmed, all fuses will appear programmed during verify.

The security fuse should be programmed last, as its effect is immediate.


**ATF750LVC OUTPUT SOURCE CURRENT  
VS. SUPPLY VOLTAGE ( $V_{OH} = 2.4V$ )**

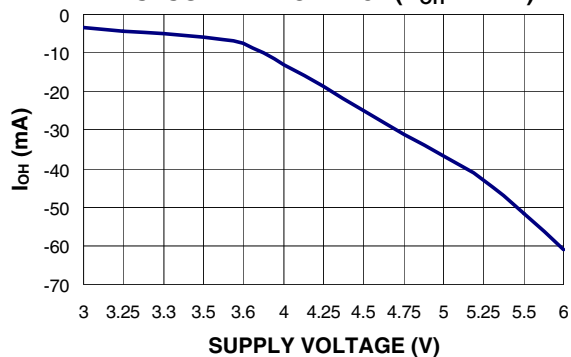


**ATF750LVC OUTPUT SINK CURRENT  
VS. SUPPLY VOLTAGE ( $V_{OL} = 0.5V$ )**

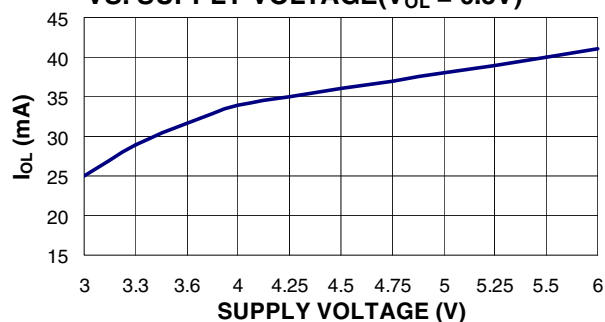


**ATF750LVC INPUT CURRENT VS. INPUT VOLTAGE  
( $T_A = 25^\circ C$ ) WITH PIN KEEPER**

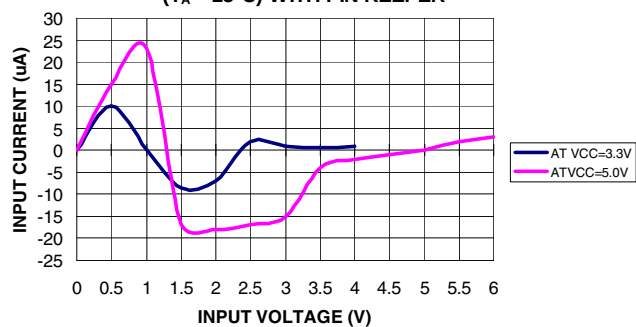


**ATF750LVC INPUT CLAMP CURRENT  
VS. INPUT VOLTAGE ( $T_A = 25^\circ C$ )**

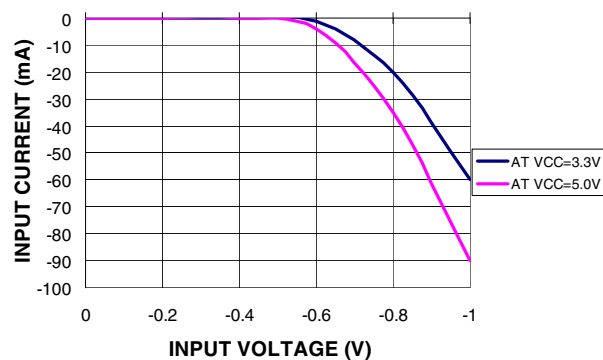


**ATF750LVC SUPPLY CURRENT  
VS. SUPPLY VOLTAGE ( $T_A = 25^\circ C$ )**

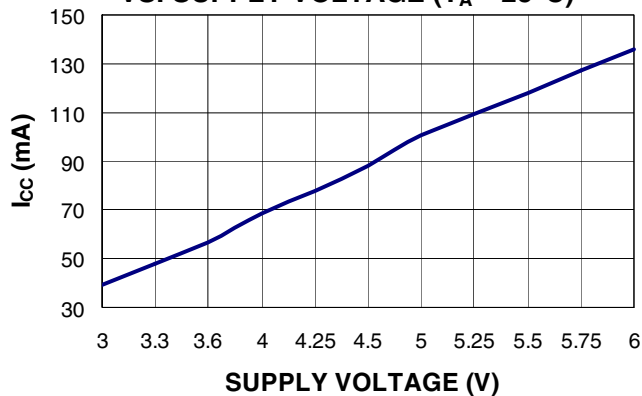


**ATF750LVC OUTPUT SOURCE CURRENT  
VS. OUTPUT VOLTAGE ( $T_A = 25^\circ\text{C}$ )**

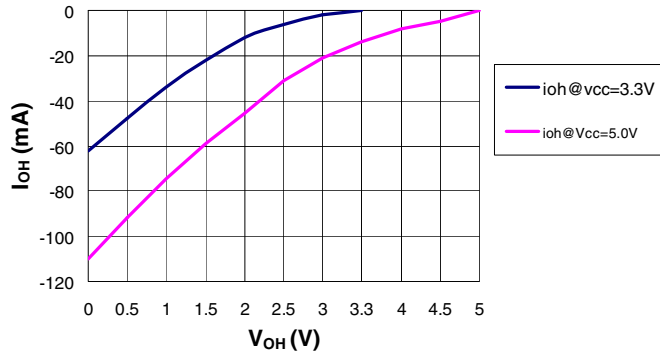


**ATF750LVC OUTPUT SINK CURRENT VS.  
OUTPUT VOLTAGE ( $T_A = 25^\circ\text{C}$ )**

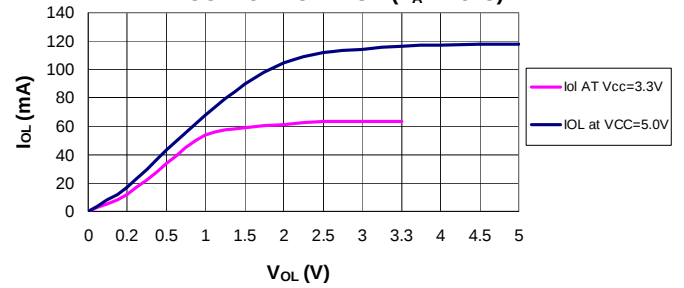

**ATF750LVC SUPPLY CURRENT  
VS. INPUT FREQUENCY ( $T_A = 25^\circ\text{C}$ )**

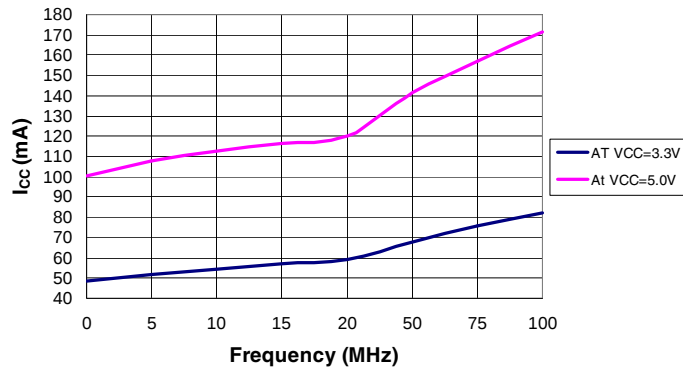

**NORMALIZED SUPPLY CURRENT  
OVER TEMPERATURE (AT  $V_{CC} = 3.3V$  &  $5.0V$ )**

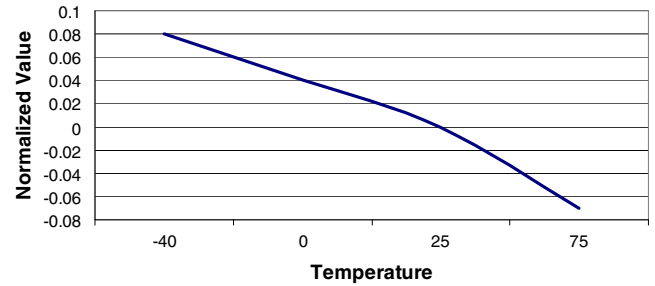

## 23. ATF750LVC Ordering Information

### 23.1 ATF750LVC Green Package Options (Pb/Halide-free/RoHS Compliant)


| $t_{PD}$<br>(ns) | $t_{COS}$<br>(ns) | Ext. $f_{MAXS}$<br>(MHz) | Ordering Code                                                                       | Package                   | Operation Range               |
|------------------|-------------------|--------------------------|-------------------------------------------------------------------------------------|---------------------------|-------------------------------|
| 15               | 10                | 55                       | ATF750LVC-15JU<br>ATF750LVC-15PU<br>ATF750LVC-15SU<br>ATF750LVC-15XU <sup>(1)</sup> | 28J<br>24P3<br>24S<br>24X | Industrial<br>(-40°C to 85°C) |

Note: 1. Special order only; TSSOP package requires special thermal management.

| Package Type |                                                              |
|--------------|--------------------------------------------------------------|
| <b>28J</b>   | 28-Lead, Plastic J-leaded Chip Carrier (PLCC)                |
| <b>24P3</b>  | 24-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP)     |
| <b>24S</b>   | 24-lead, 0.300" Wide, Plastic Gull Wing Small Outline (SOIC) |
| <b>24X*</b>  | 24-lead, 0.173" Wide, Thin Shrink Small Outline (TSSOP)      |

## 24. Package Information

### 24.1 28J – PLCC

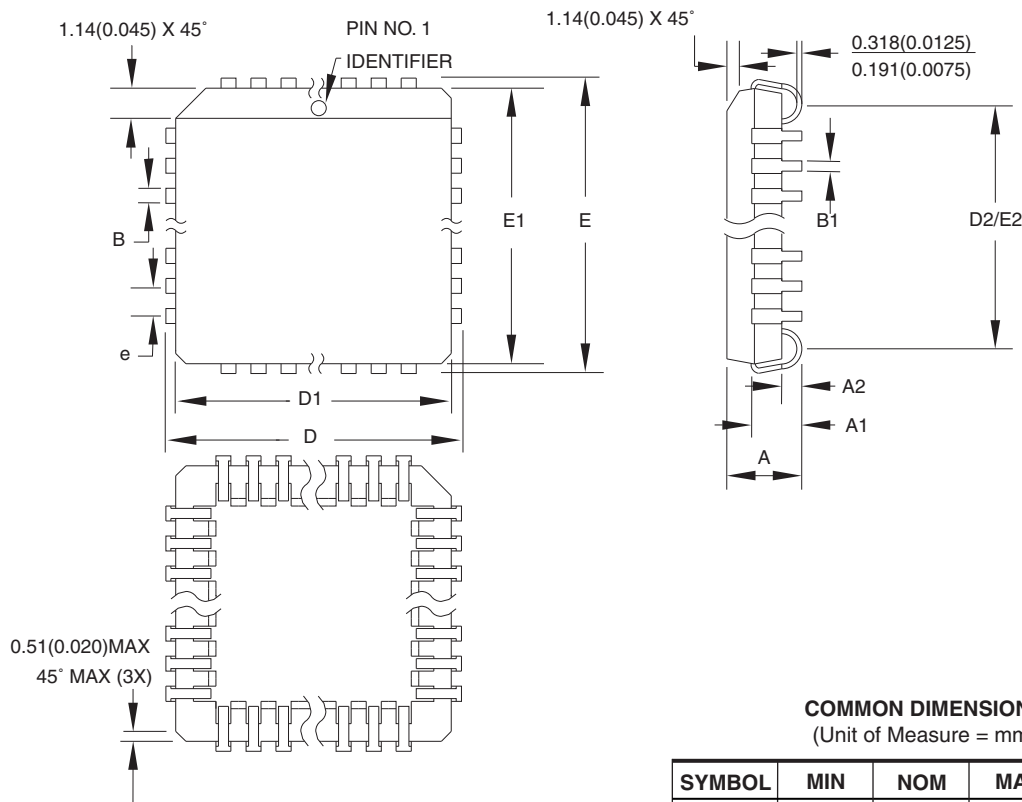

**COMMON DIMENSIONS**  
(Unit of Measure = mm)

| SYMBOL | MIN       | NOM | MAX    | NOTE   |
|--------|-----------|-----|--------|--------|
| A      | 4.191     | –   | 4.572  |        |
| A1     | 2.286     | –   | 3.048  |        |
| A2     | 0.508     | –   | –      |        |
| D      | 12.319    | –   | 12.573 |        |
| D1     | 11.430    | –   | 11.582 | Note 2 |
| E      | 12.319    | –   | 12.573 |        |
| E1     | 11.430    | –   | 11.582 | Note 2 |
| D2/E2  | 9.906     | –   | 10.922 |        |
| B      | 0.660     | –   | 0.813  |        |
| B1     | 0.330     | –   | 0.533  |        |
| e      | 1.270 TYP |     |        |        |

- Notes:
1. This package conforms to JEDEC reference MS-018, Variation AB.
  2. Dimensions D1 and E1 do not include mold protrusion. Allowable protrusion is .010" (0.254 mm) per side. Dimension D1 and E1 include mold mismatch and are measured at the extreme material condition at the upper or lower parting line.
  3. Lead coplanarity is 0.004" (0.102 mm) maximum.

10/04/01



2325 Orchard Parkway  
San Jose, CA 95131

#### TITLE

**28J**, 28-lead, Plastic J-leaded Chip Carrier (PLCC)


#### DRAWING NO.

28J

#### REV.

B

## 24.2 24P3 – PDIP

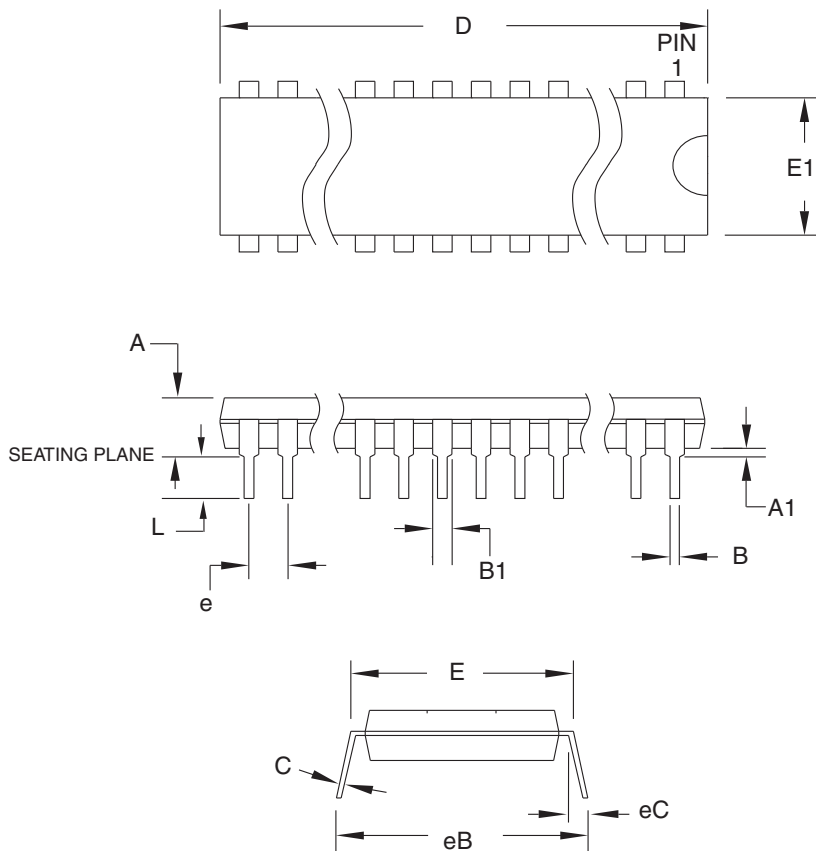

**COMMON DIMENSIONS**  
(Unit of Measure = mm)

| SYMBOL | MIN       | NOM | MAX    | NOTE   |
|--------|-----------|-----|--------|--------|
| A      | –         | –   | 5.334  |        |
| A1     | 0.381     | –   | –      |        |
| D      | 31.623    | –   | 32.131 | Note 2 |
| E      | 7.620     | –   | 8.255  |        |
| E1     | 6.096     | –   | 7.112  | Note 2 |
| B      | 0.356     | –   | 0.559  |        |
| B1     | 1.270     | –   | 1.651  |        |
| L      | 2.921     | –   | 3.810  |        |
| C      | 0.203     | –   | 0.356  |        |
| eB     | –         | –   | 10.922 |        |
| eC     | 0.000     | –   | 1.524  |        |
| e      | 2.540 TYP |     |        |        |

- Notes:
1. This package conforms to JEDEC reference MS-001, Variation AF.
  2. Dimensions D and E1 do not include mold Flash or Protrusion. Mold Flash or Protrusion shall not exceed 0.25 mm (0.010").

6/1/04



2325 Orchard Parkway  
San Jose, CA 95131

**TITLE**

**24P3**, 24-lead (0.300"/7.62 mm Wide) Plastic Dual  
Inline Package (PDIP)


**DRAWING NO.**

24P3

**REV.**

D

## 24.3 24S – SOIC

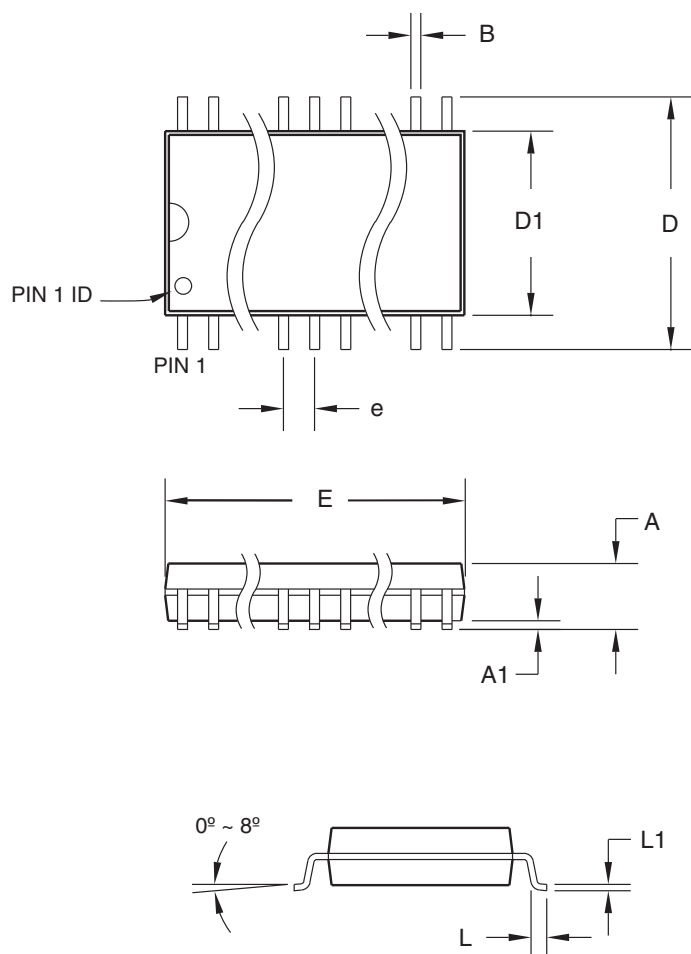

**COMMON DIMENSIONS**  
(Unit of Measure = mm)

| SYMBOL | MIN      | NOM | MAX   | NOTE |
|--------|----------|-----|-------|------|
| A      | –        | –   | 2.65  |      |
| A1     | 0.10     | –   | 0.30  |      |
| D      | 10.00    | –   | 10.65 |      |
| D1     | 7.40     | –   | 7.60  |      |
| E      | 15.20    | –   | 15.60 |      |
| B      | 0.33     | –   | 0.51  |      |
| L      | 0.40     | –   | 1.27  |      |
| L1     | 0.23     | –   | 0.32  |      |
| e      | 1.27 BSC |     |       |      |

06/17/2002



2325 Orchard Parkway  
San Jose, CA 95131

### TITLE

**24S**, 24-lead (0.300" body) Plastic Gull Wing Small Outline (SOIC)

### DRAWING NO.


24S

### REV.

B

# 24.4 24X – TSSOP

Dimensions in Millimeter and (Inches)\*  
JEDEC STANDARD MO-153 AD  
Controlling dimension: millimeters

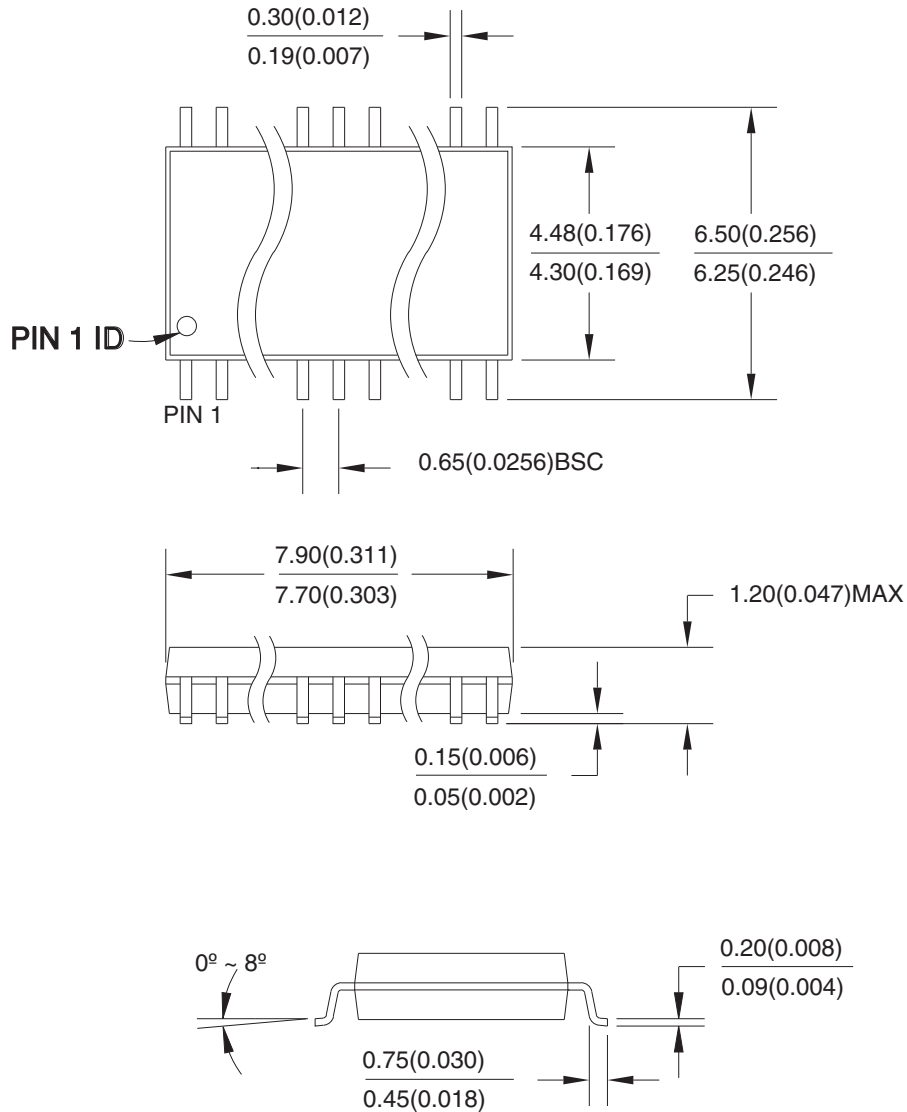

04/11/2001



2325 Orchard Parkway  
San Jose, CA 95131

## TITLE

**24X**, 24-lead (4.4 mm body width) Plastic Thin Shrink Small Outline Package (TSSOP)

## DRAWING NO.

24X

## REV.

A



## 25. Revision History

| Revision Level – Release Date | History                                                                                       |
|-------------------------------|-----------------------------------------------------------------------------------------------|
| F – November 2008             | Updated datasheet with extended voltage range offering.<br>Removed the leaded parts offering. |



## Headquarters

---

**Atmel Corporation**  
2325 Orchard Parkway  
San Jose, CA 95131  
USA  
Tel: 1(408) 441-0311  
Fax: 1(408) 487-2600

## International

---

**Atmel Asia**  
Unit 1-5 & 16, 19/F  
BEA Tower, Millennium City 5  
418 Kwun Tong Road  
Kwun Tong, Kowloon  
Hong Kong  
Tel: (852) 2245-6100  
Fax: (852) 2722-1369

**Atmel Europe**  
Le Krebs  
8, Rue Jean-Pierre Timbaud  
BP 309  
78054 Saint-Quentin-en-  
Yvelines Cedex  
France  
Tel: (33) 1-30-60-70-00  
Fax: (33) 1-30-60-71-11

**Atmel Japan**  
9F, Tonetsu Shinkawa Bldg.  
1-24-8 Shinkawa  
Chuo-ku, Tokyo 104-0033  
Japan  
Tel: (81) 3-3523-3551  
Fax: (81) 3-3523-7581

## Product Contact

---

**Web Site**  
[www.atmel.com](http://www.atmel.com)

**Technical Support**  
[PLD@atmel.com](mailto:PLD@atmel.com)

**Sales Contact**  
[www.atmel.com/contacts](http://www.atmel.com/contacts)

**Literature Requests**  
[www.atmel.com/literature](http://www.atmel.com/literature)

---

**Disclaimer:** The information in this document is provided in connection with Atmel products. No license, express or implied, by estoppel or otherwise, to any intellectual property right is granted by this document or in connection with the sale of Atmel products. **EXCEPT AS SET FORTH IN ATMEL'S TERMS AND CONDITIONS OF SALE LOCATED ON ATMEL'S WEB SITE, ATMEL ASSUMES NO LIABILITY WHATSOEVER AND DISCLAIMS ANY EXPRESS, IMPLIED OR STATUTORY WARRANTY RELATING TO ITS PRODUCTS INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, OR NON-INFRINGEMENT. IN NO EVENT SHALL ATMEL BE LIABLE FOR ANY DIRECT, INDIRECT, CONSEQUENTIAL, PUNITIVE, SPECIAL OR INCIDENTAL DAMAGES (INCLUDING, WITHOUT LIMITATION, DAMAGES FOR LOSS OF PROFITS, BUSINESS INTERRUPTION, OR LOSS OF INFORMATION) ARISING OUT OF THE USE OR INABILITY TO USE THIS DOCUMENT, EVEN IF ATMEL HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.** Atmel makes no representations or warranties with respect to the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Atmel does not make any commitment to update the information contained herein. Unless specifically provided otherwise, Atmel products are not suitable for, and shall not be used in, automotive applications. Atmel's products are not intended, authorized, or warranted for use as components in applications intended to support or sustain life.

© 2008 Atmel Corporation. All rights reserved. Atmel®, Atmel logo and combinations thereof, and others are registered trademarks or trademarks of Atmel Corporation or its subsidiaries. Other terms and product names may be trademarks of others.