High Performance ASIC Cooling Solutions w/Thermal Tape Attachment



*Image above is for illustration purpose only.

ATS Part#: **ATS-56004-C1-R0**

Description: maxiFLOW™ Heat Sink, T412, BLACK-ANODIZED

Heat Sink Type: maxiFLOW

Heat Sink Attachment: THERMAL TAPE

Equivalent Part Number: ATS-56004-C3-R0

Features & Benefits

- **maxiFLOW™** design features a low profile, spread fin array that maximizes surface area for more effective convection (air) cooling
- Designed specifically for ASIC package and their unique cooling requirements
- Comes pre-assembled with high performance thermal interface material

Thermal Performance

AIR VELOCITY		@200 LFM 1.0 M/S	@300 LFM 1.5 M/S	@400 LFM 2.0 M/S	@500 LFM 2.5 M/S	@600 LFM 3.0 M/S	@700 LFM 3.5 M/S	@800 LFM 4.0 M/S
THERMAL RESISTANCE	Unducted Flow	7.90 °C/W	6.60 °C/W	5.40 °C/W	4.70 °C/W	4.00 °C/W	3.60 °C/W	3.30 °C/W
	Ducted Flow	4.80	n/a	n/a	n/a	n/a	n/a	n/a

Product Detail

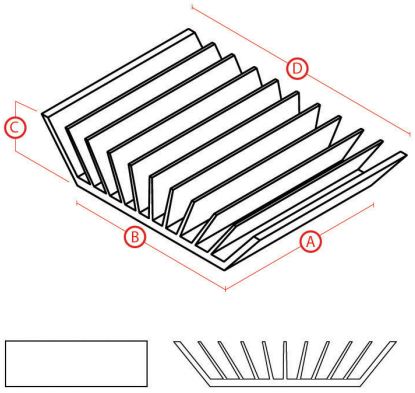
Schematic Image	Dimension A	Dimension B	Dimension C	Dimension D	TIM	Finish
	40.0 mm	30.0 mm	5.0 mm	36.8 mm	T412	BLACK-ANODIZED

*Image above is for illustration purpose only.

Notes:

- Dimension A and B refer to heat sink length and width
- Dimension C is the heat sink height from the bottom of the base to the top of the fin field.
- ATS-56004-C3-R0 is the exact heat sink assembly with an equivalent thermal interface material (Saint Gobain C675).
- Thermal performance data are provided for reference only. Actual performance may vary by application.
- ATS reserves the right to update or change its products without notice to improve the design or performance.
- ATS certifies that this heat sink assembly is RoHS-6 and REACH compliant.
- Contact ATS to learn about custom options available.

For more information, to find a distributor or to place an order, please contact us at 781-769-2800 (North America), sales@qats.com or www.qats.com.

© 2012 Advanced Thermal Solutions, Inc. | 89-27 Access Road | Norwood MA | 02062 | USA

ATS ADVANCED THERMAL SOLUTIONS, INC. Innovations in Thermal Management®

Rev - 121101