



■ Features :

- Universal AC input / Full range
- 3 pole AC inlet IEC320-C14
- Built-in active PFC function, PF>0.95
- Class I power (with earth pin)
- Protections: Short circuit / Overload / Over voltage / Over temperature
- Fully enclosed plastic case
- LED indicator for power on
- No load power consumption < 1W @240VAC
- 2 years warranty




SPECIFICATION

MODEL		ATX-100					
OUTPUT	OUTPUT NUMBER	CH1	CH2	CH3	CH4	CH5	
	DC VOLTAGE	3.3V	5V	12V	-12V	5VSB	
	RATED CURRENT	5A	6A	3.75A	0.3A	1A	
	CURRENT RANGE	0 ~ 6A	0 ~ 8A	1 ~ 7A	0 ~ 0.5A	0 ~ 2A (Note.7)	
	RATED POWER	50W		-----			
	Note.8,9	100W(continue), 125W(7min.), 150W(3min.)					
	RIPPLE & NOISE (max.)	Note.2	100mVp-p	100mVp-p	120mVp-p	120mVp-p	100mVp-p
	VOLTAGE TOLERANCE	Note.3	±5.0%	±5.0%	±5.0%	±10%	±5.0%
	LINE REGULATION		±1.0%	±1.0%	±1.0%	±1.0%	±1.0%
	LOAD REGULATION		±5.0%	±5.0%	±5.0%	±10%	±5.0%
	SETUP, RISE TIME	3000ms, 80ms at full load					
HOLD UP TIME(Typ.)	40ms at full load						
INPUT	VOLTAGE RANGE	Note.10	90 ~ 264VAC 127 ~ 370VDC				
	FREQUENCY RANGE	47 ~ 63Hz					
	POWER FACTOR (Typ.)	PF>0.95 at full load					
	EFFICIENCY(Typ.)	80%					
	AC CURRENT (Typ.)	1.4A/115AVC 0.7A/230VAC					
	INRUSH CURRENT (Typ.)	COLD START < 60A at 230VAC					
	LEAKAGE CURRENT (max.)	<2mA / 240VAC					
PROTECTION	OVERLOAD	6.2A min.		8.2A min.	7.2A min.	-----	-----
	Protection type : Shut down o/p voltage(except for 5VSB), re-power on to recover						
	OVER VOLTAGE	3.7 ~ 4.1V		5.7 ~ 6.5V	13.2 ~ 14.4V	-----	-----
	Protection type : Shut down o/p voltage(except for 5VSB), re-power on to recover						
	OVER TEMPERATURE	100℃ ±5℃ (TSW1:detect on heatsink of power transistor)					
Protection type : Shut down o/p voltage(except for 5VSB), re-power on to recover							
SIGNAL FUNCTION	POWER OK	TTL compatible signal with 100 ~ 500ms delay after set up					
	PS-ON	Power ON:PS-ON="Low" or "<0.8V"; Power OFF:PS-ON="Hi" or ">2V"					
ENVIRONMENT	WORKING TEMP.	0 ~ +50℃ (Refer to output load derating curve)					
	WORKING HUMIDITY	20 ~ 90% RH non-condensing					
	STORAGE TEMP., HUMIDITY	-20 ~ +85℃, 10 ~ 95% RH					
	TEMP. COEFFICIENT	±0.05%/℃ (0 ~ 60℃)					
	VIBRATION	10 ~ 500Hz, 2G 10min./1cycle, period for 60min. each along X, Y, Z axes					
SAFETY & EMC (Note 6)	SAFETY STANDARDS	Design refer to UL60950-1, IEC60950-1 CB approved by TUV					
	WITHSTAND VOLTAGE	I/P-O/P:3KVAC					
	ISOLATION RESISTANCE	I/P-O/P:>100M Ohms/500VDC 25℃ 70%RH					
	EMI CONDUCTION & RADIATION	Compliance to EN55022 (CISPR22) Class B, EN61204-3					
	HARMONIC CURRENT	Compliance to EN61000-3-2,-3					
	EMS IMMUNITY	Compliance to EN61000-4-2,3,4,5,6,8,11; ENV50204, EN55024, light industry level, criteria A					
OTHERS	MTBF	152Khrs min. MIL-HDBK-217F (25℃)					
	DIMENSION	210*85*46mm(L*W*H)					
	PACKING	1.12Kg; 12pcs/14.5Kg/0.95CUFT					
NOTE	1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25℃ of ambient temperature. 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. 3. Tolerance : includes set up tolerance, line regulation and load regulation. 4. Line regulation is measured from low line to high line at rated load. 5. Each output power up to maximum current, but total load cannot exceed maximum output power(100W). 6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. 7. 5VSB peak load 2A< 10sec. 8. Total power of 5V, 3.3V should less than 50W. 9. 125W peak load duty 7min./hr, 150W peak load duty 3min./hr. 10. Derating may be needed under low input voltage. Please check the derating curve for more details. 11. 2 years warranty is based on 12hrs/day of operating time for the unit.						

Mechanical Specification


Case No.961A

Unit:mm

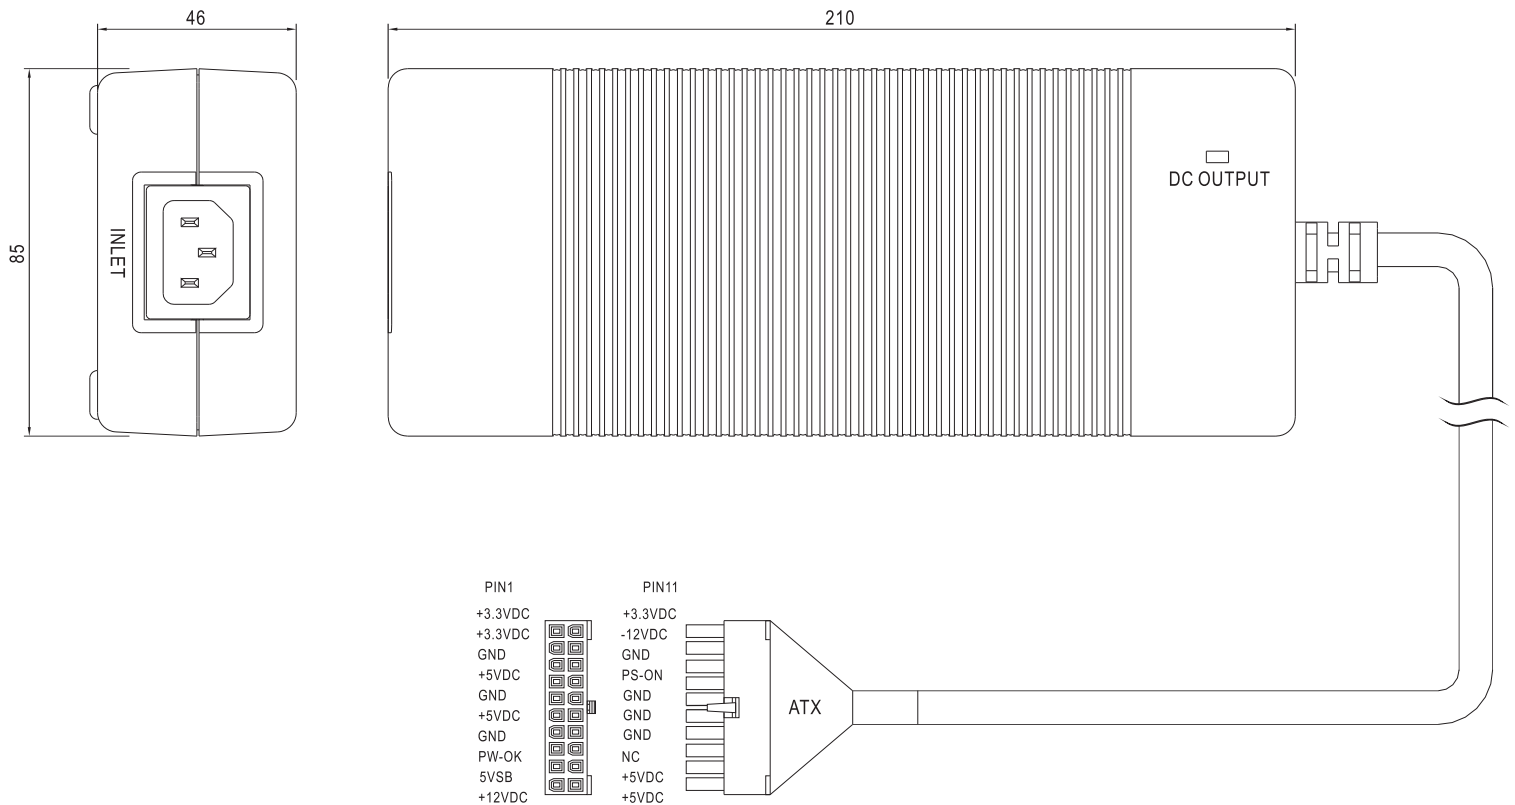


Block Diagram

fosc : 88KHz

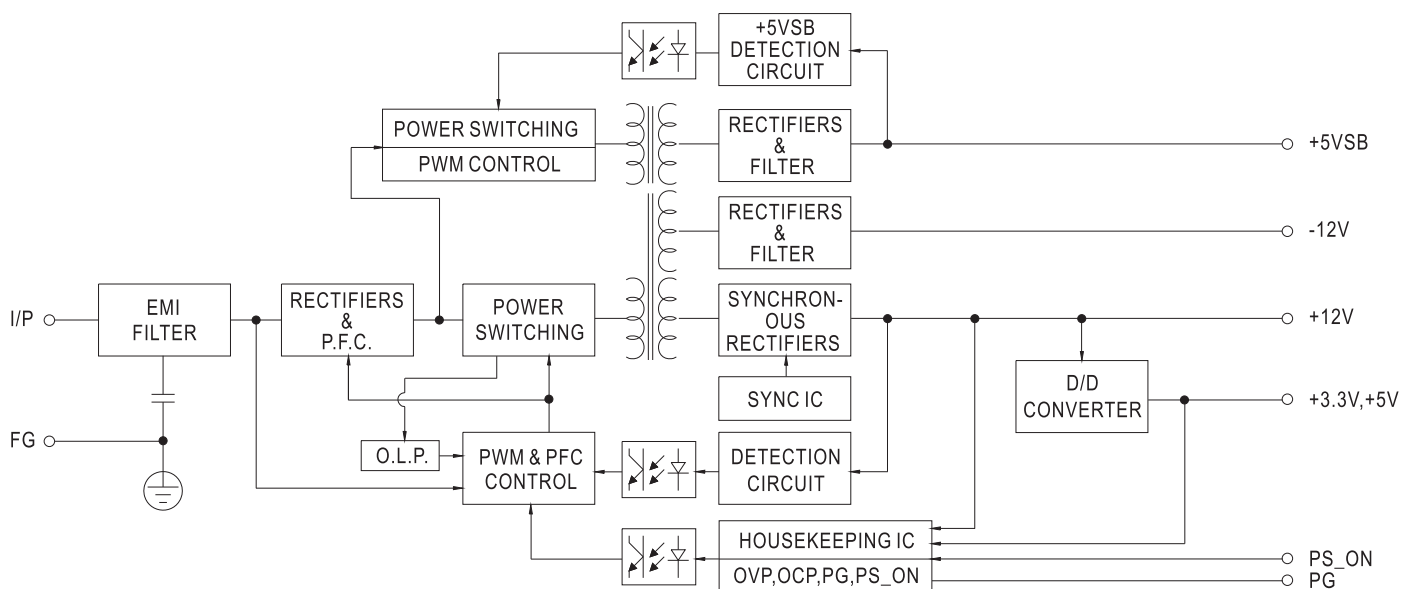


Sequence

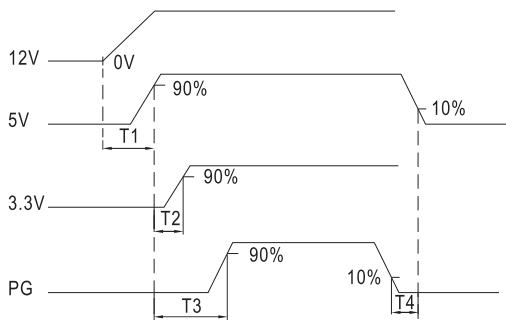

T1 : 0~20ms ($\pm 20\%$)
T2 : 0~15ms ($\pm 20\%$)
T3 : 100~500ms
T4 : 0~30ms

Derating Curve

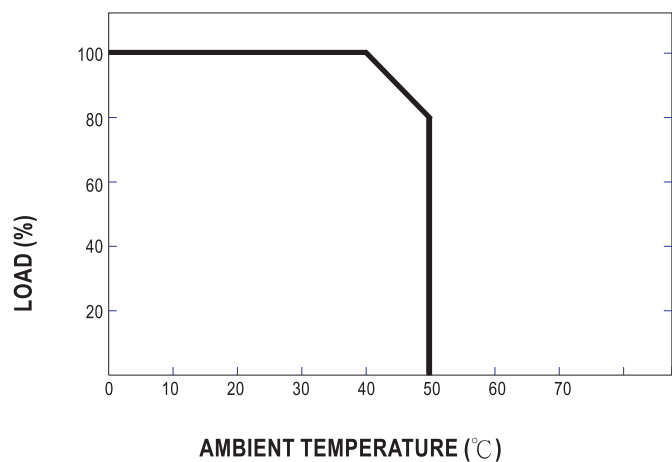

Output Load VS Input Voltage

