POSEICO SPA
Via Pillea 42-44, 16153 Genova - ITALY
Tel. + 39 010 8599400 - Fax + 39 010 8682006
Sales Office:
Tel. + 39 010 8599400 - sales@poseico.com

RECTIFIER DIODE

AUS301

Repetitive voltage up to **600 V**
Mean forward current **2815 A**
Surge current **16 kA**

FINAL SPECIFICATION
Mar. 17 - Issue: 4


Symbol	Characteristic	Conditions	Tj [°C]	Value	Unit
BLOCKING					
V_{RRM}	Repetitive peak reverse voltage		190	600	V
V_{RSM}	Non-repetitive peak reverse voltage		190	700	V
I_{RRM}	Repetitive peak reverse current	V=VRRM	190	50	mA
CONDUCTING					
$I_{F(AV)}$	Mean forward current	180° sin, 50 Hz, Th=85°C, double side cooled		2815	A
$I_{F(AV)}$	Mean forward current	180° sin, 50 Hz, Tc=55°C, double side cooled		4658	A
I_{FSM}	Surge forward current	Sine wave, 10 ms without reverse voltage	190	16	kA
I^2t	I^2t			1280 x 10^3	A^2s
V_{FM}	Forward voltage	Forward current = 1200 A	25	1,05	V
$V_{F(TO)}$	Threshold voltage		190	0,75	V
r_F	Forward slope resistance		190	0,250	mohm
SWITCHING					
t_{rr}	Reverse recovery time		190		µs
Q_{rr}	Reverse recovery charge				µC
I_{rr}	Peak reverse recovery current				A
MOUNTING					
$R_{th(j-c)}$	Thermal impedance, DC	Junction to case, double side cooled		15,0	°C/kW
$R_{th(c-h)}$	Thermal impedance	Case to heatsink, double side cooled		7,0	°C/kW
T_j	Operating junction temperature			-30 / 190	°C
F	Mounting force			8.0 / 9.0	kN
	Mass			85	g


ORDERING INFORMATION : AUS301 S 06

standard specification — VRRM/100

DISSIPATION CHARACTERISTICS


SQUARE WAVE

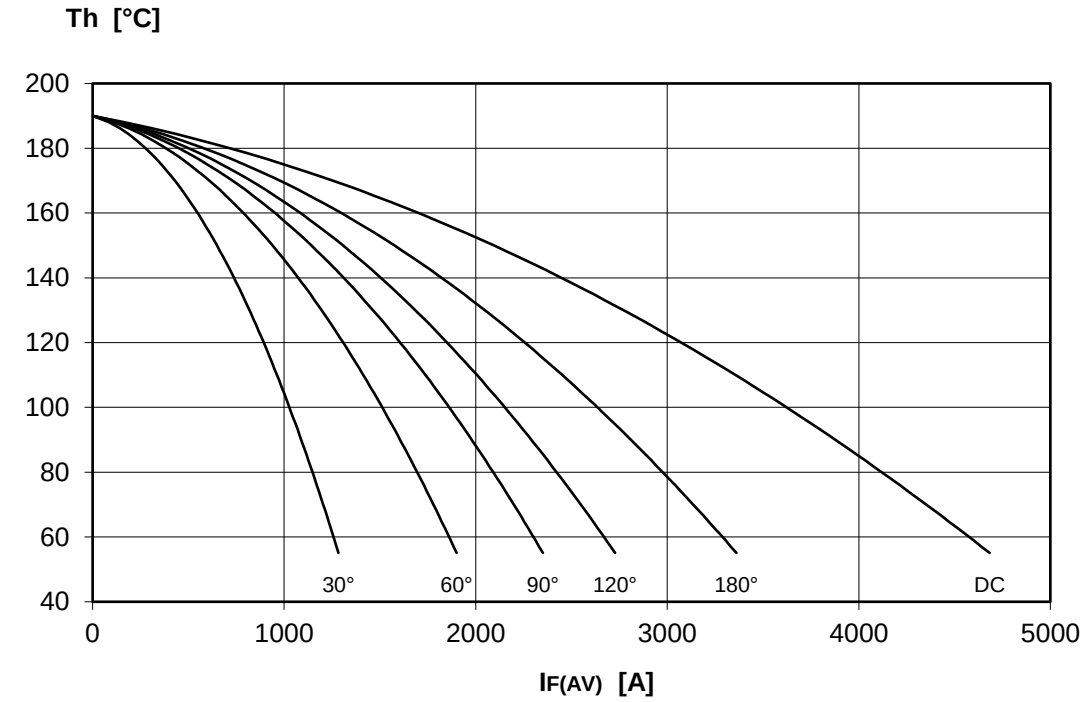


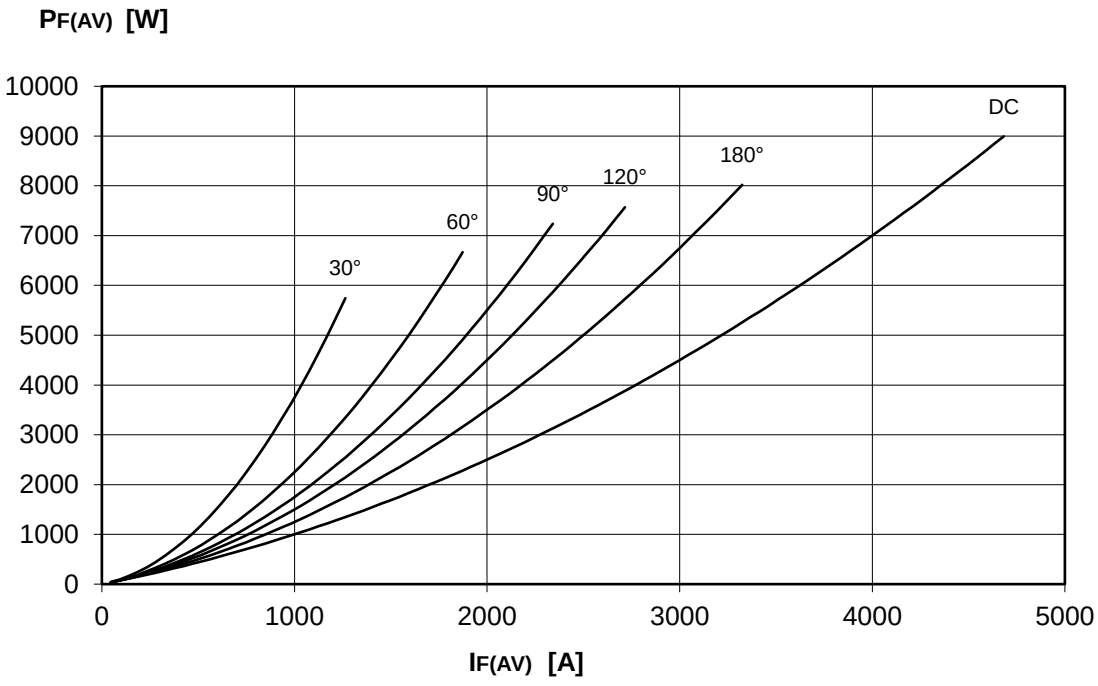

DISSIPATION CHARACTERISTICS

SINE WAVE

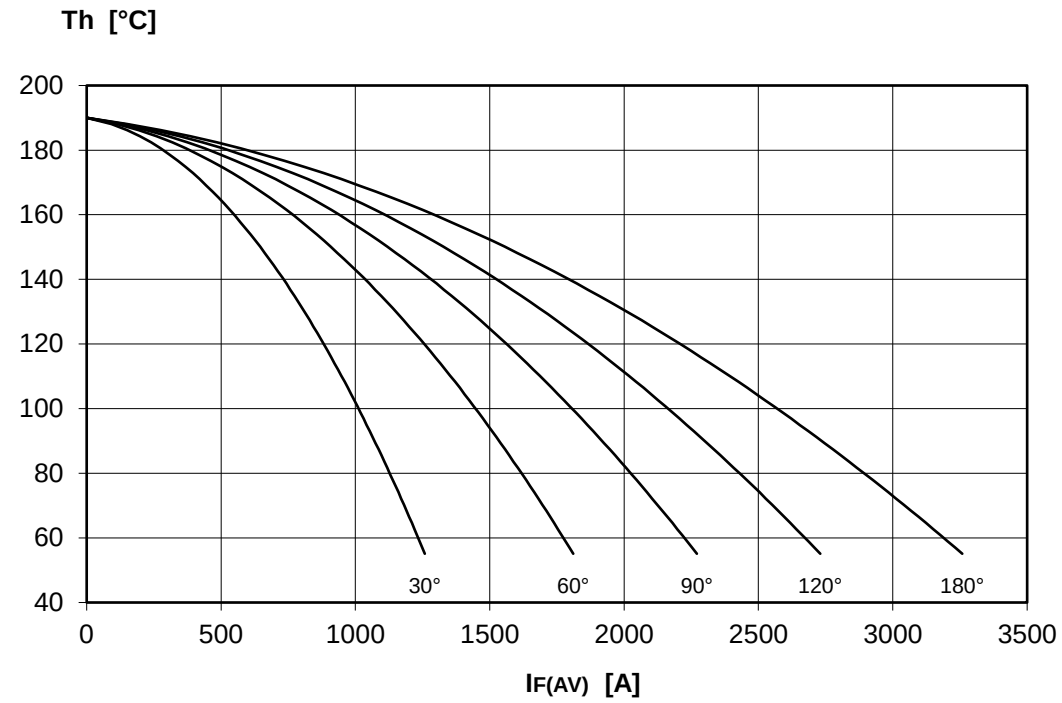

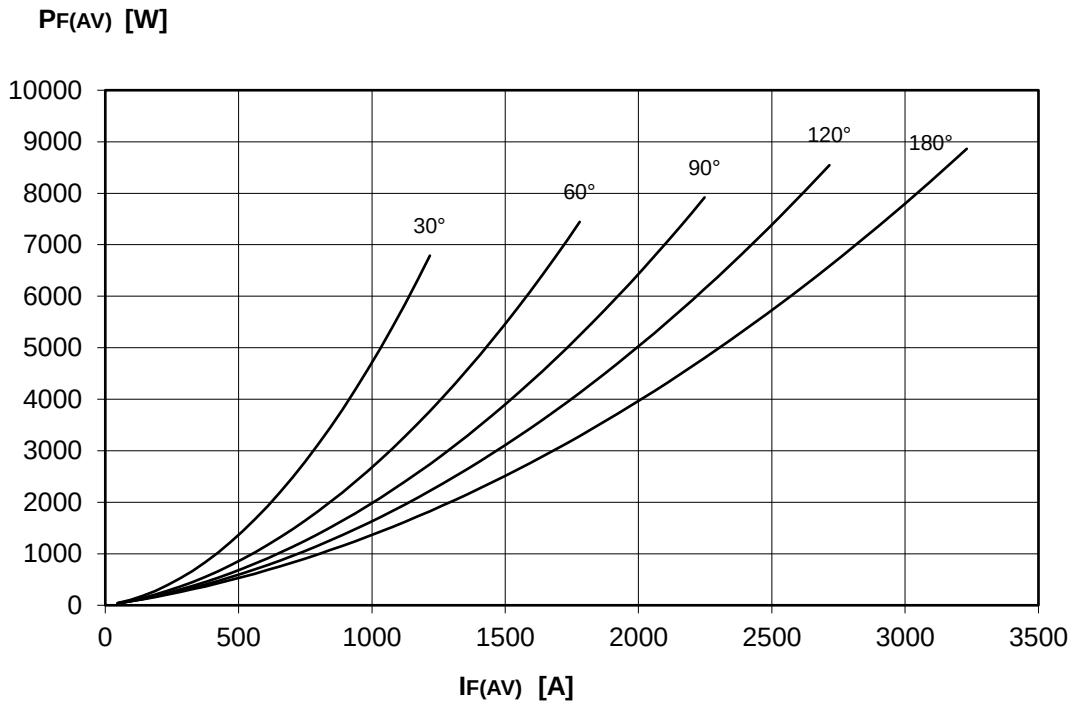


AUS301 RECTIFIER DIODE


POSEICO POWER ELECTRONICS

FINAL SPECIFICATION Mar. 17 - Issue: 4


FORWARD CHARACTERISTIC
Tj = 190 °C

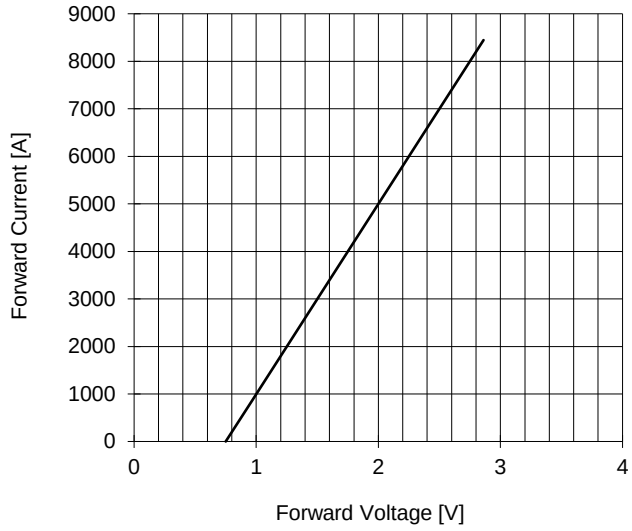


SURGE CHARACTERISTIC
Tj = 190 °C

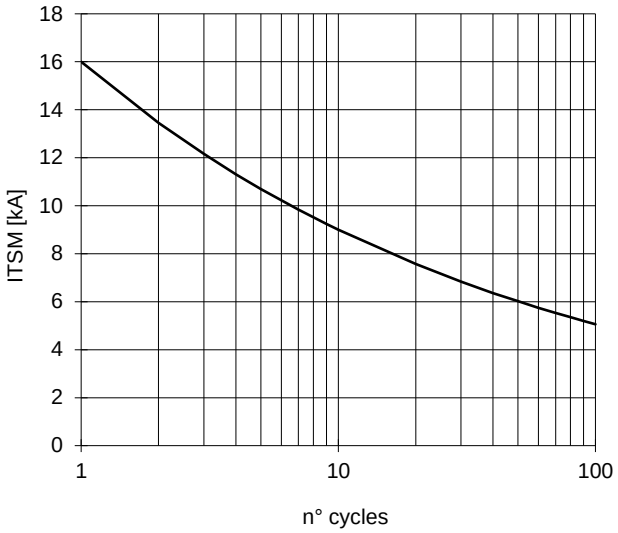

TRANSIENT THERMAL IMPEDANCE
DOUBLE SIDE COOLED

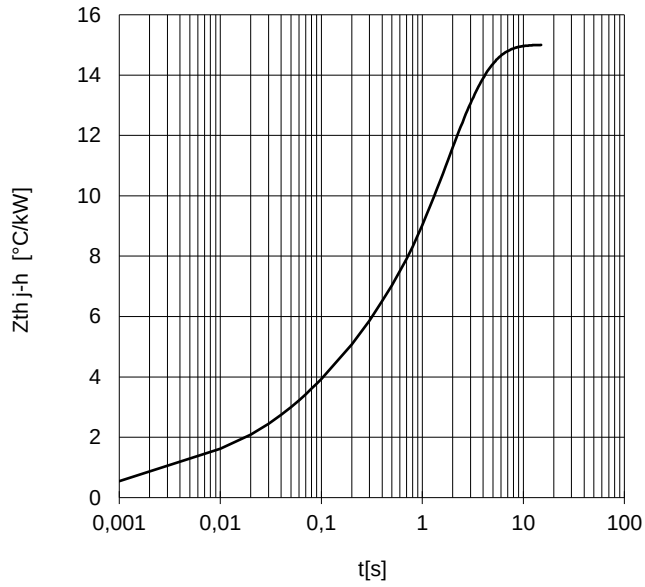

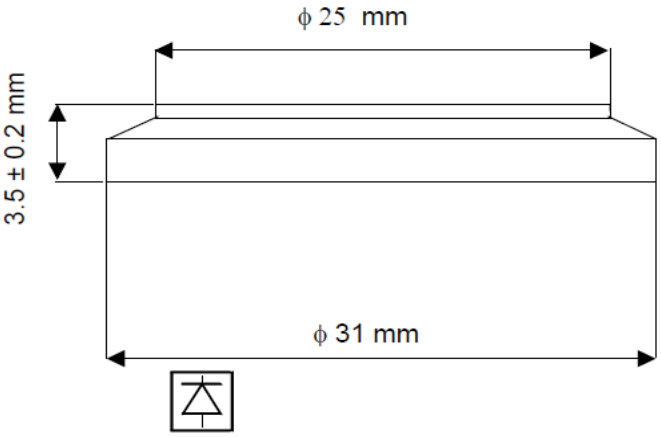

All the characteristics given in this data sheet are guaranteed only with uniform clamping force, cleaned and lubricated heatsink, surfaces with flatness < .03 mm and roughness < 2 µm.
In the interest of product improvement POSEICO SpA reserves the right to change any data given in this data sheet at any time without previous notice.
If not stated otherwise the maximum value of ratings (simbols over shaded background) and characteristics is reported.

Distributed by