

AVE300 Series

198 Watts

Data Sheet

Total Power: 198 Watts
Input Voltage: 36 - 75 V
of Outputs: Single

SPECIAL FEATURES

- 2:1 Wide input range
- Optimised for high density, small space applications
- Low ripple and noise
- Fixed switching frequency
- Super high efficiency
- High capacitive load capability
- Basic insulation system
- Aluminium Substrate design

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950



Electrical Specifications

Input	
Input range:	36 - 75 VDC
Efficiency ² :	92%
Output	
Voltage tolerance:	+/-1%
Line regulation:	5 mV
Load regulation:	10 mV
Noise/ripple:	1.2 Vo, 1.5 Vo, 1.8 Vo = 75 mV 2.5 Vo = 100 mV, 3.3 Vo = 150 mV
Over voltage protection:	Hiccup: Auto-restart
Over temperature protection:	Auto-restart
Switching frequency:	220 kHz - 280 kHz
Temperature coefficient:	±0.02/°C
Isolation	
I/O isolation:	1500 VDC min.

Environmental Specifications

Operating ambient temperature range:	-40 °C to +85 °C
Storage temperature:	-55 °C to +125 °C
Humidity:	5% to 95% (non-condensing)
MTBF:	2 Million hours
RoHS Compliant	


Ordering Information

Model number	Input voltage	Output voltage	Power
AVE300-48S1V2-4	36 - 75 Vin	1.2 V @ 60 A	72 W
AVE300-48S1V2B-4	36 - 75 Vin	1.2 V @ 60 A	72 W
AVE300-48S1V2P-4	36 - 75 Vin	1.2 V @ 60 A	72 W
AVE300-48S1V2PB-4	36 - 75 Vin	1.2 V @ 60 A	72 W
AVE300-48S1V5B-4	36 - 75 Vin	1.5 V @ 60 A	90 W
AVE300-48S1V8B-4	36 - 75 Vin	1.8 V @ 60 A	108 W
AVE300-48S2V5-4	36 - 75 Vin	2.5 V @ 60 A	150 W
AVE300-48S2V5B-4	36 - 75 Vin	2.5 V @ 60 A	150 W
AVE300-48S2V5P-4	36 - 75 Vin	2.5 V @ 60 A	150 W
AVE300-48S2V5PB-4	36 - 75 Vin	2.5 V @ 60 A	150 W
AVE300-48S3V3B-4	36 - 75 Vin	3.3 V @ 60 A	198 W
AVE300-48S3V3B-6	36 - 75 Vin	3.3 V @ 60 A	198 W

- Standard version is negative enable
- "-6" = 3.8 mm pin length
- "-4" = 4.8 mm pin length
- "L" = RoHS6 compliance
- "P" = Positive enable
- "B" = Baseplate


Mechanical Drawings

With no base plate:

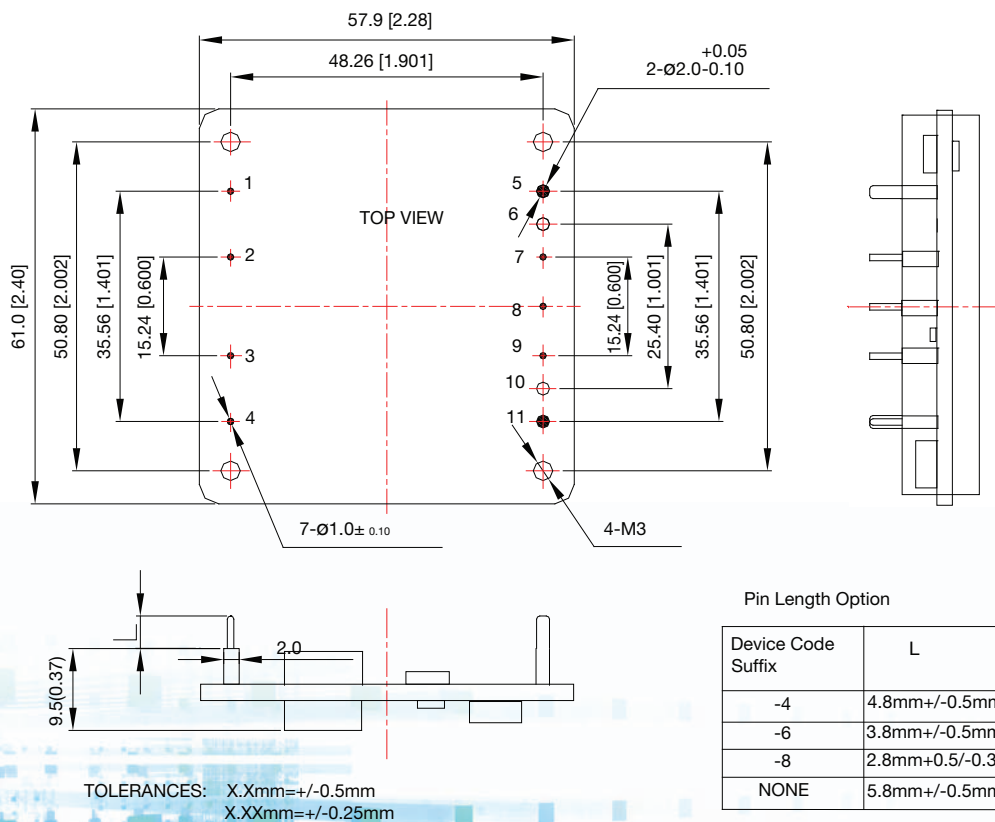

Mechanical Drawings

With base plate:

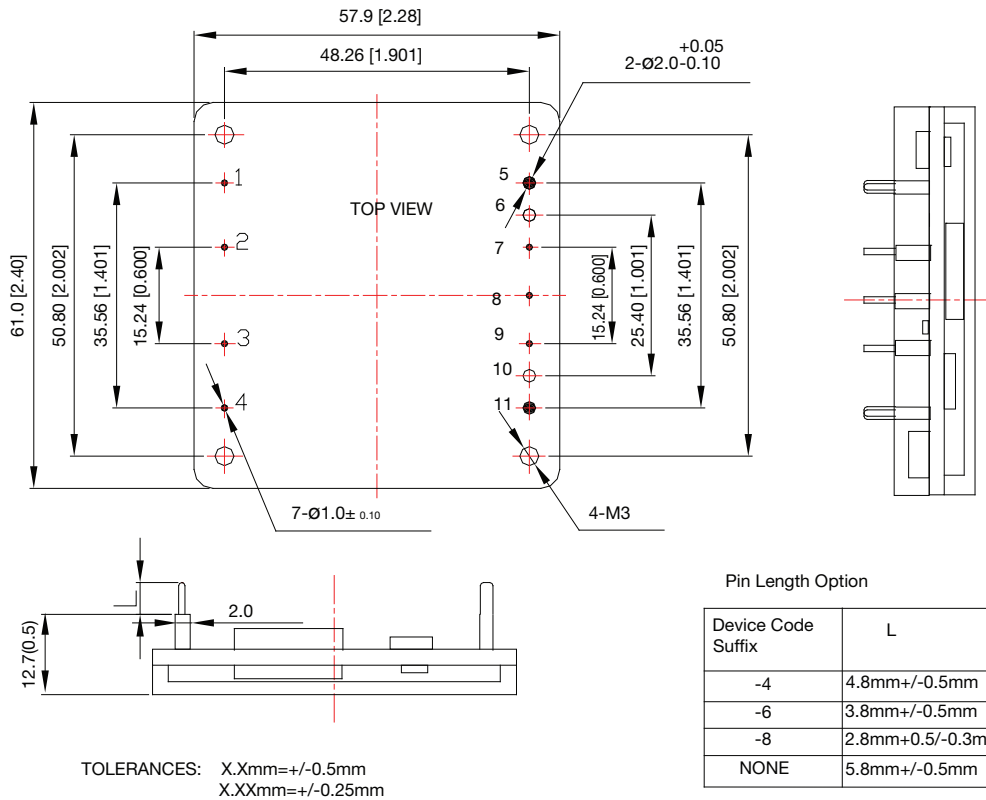

Pin Designations

Pin No.	Function
P1	Vin(+)
P2	CNT
P3	NC
P4	Vi(-)
P5	Vo(+)
P6	NC
P7	+Sense
P8	Trim
P9	-Sense
P10	NC
P11	Vo(-)

Notes: Un-dimensioned components are for visual reference only.

WORLDWIDE OFFICES

Americas

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN
EMBEDDED TECHNOLOGIES

www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners. © 2014 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com