


AV050 Series

50 Watts

Data Sheet

Total Power: 50 Watts
Input Voltage: 36 - 75V
of Outputs: Single

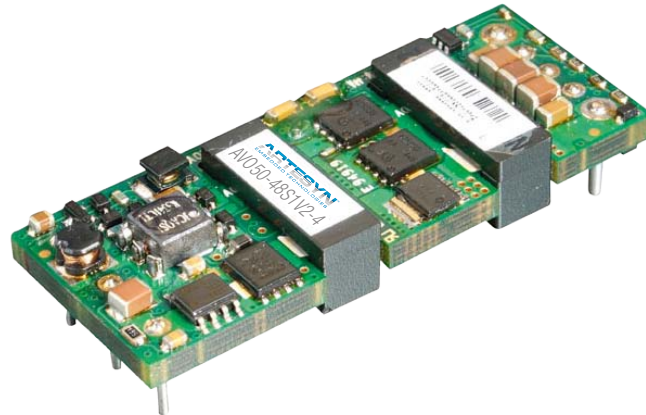

SPECIAL FEATURES

- 2:1 Wide input range
- Optimised for High density, small space applications
- Low ripple and noise
- Fixed switching frequency
- High efficiency
- High capacitive load capability
- Basic insulation system
- Pre-bias start-up capability
- Open-frame structure

SAFETY

- UL, cUL: UL60950
- TUV/CE: IEC/EN60950

Electrical Specifications

Input	
Input range:	36 - 75 VDC
Efficiency:	91% @ 3.3V, 5V and 12V
Output	
Maximum power:	+/-1% to +/-1.6%
Line regulation:	5V: 4mV; 12V: 9mV; Others: 1mV
Load regulation:	5V and 12V: 5mV; Others: 1mV
Noise/ripple:	1.2V, 2.5V, 3.3V: 50mV; 1.5V, 5V, 12V: 55mV; 1.8V: 45mV
Over voltage protection: Over temperature protection:	Auto-restart
Switching frequency:	310KHz
Temperature coefficient:	±0.02 /°C
Isolation	
I/O isolation:	1500 VDC min.

Environmental Specifications

Operating ambient temperature range:	-40°C to +85°C
Storage temperature:	-55°C to +125°C
Humidity:	5% to 95% (non-condensing)
MTBF:	2.5 Million hours
RoHS Compliant	

Notes:

- Standard version is negative enable
- "-6" = 3.8mm pin length
- "-4" = 4.8mm pin length
- "-P" = Positive enable

Mechanical Drawings



1. All specifications are subject to change without notice. Mechanical drawings are for reference only.
2. Warranty: 2 yr
3. Label and logo appearance may vary from what is shown on mechanical drawings.

Pin Assignments

Pin #	Function
1	+V in
2	Enable
3	-V in
4	-V out
5	- Sense
6	Trim
7	+Sense
8	+V out

WORLDWIDE OFFICES**Americas**

2900 S.Diablo Way
Tempe, AZ 85282
USA
+1 888 412 7832

Europe (UK)

Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX
United Kingdom
+44 (0) 1384 842 211

Asia (HK)

14/F, Lu Plaza
2 Wing Yip Street
Kwun Tong, Kowloon
Hong Kong
+852 2176 3333

ARTESYN[™]
EMBEDDED TECHNOLOGIES

www.artesyn.com

While every precaution has been taken to ensure accuracy and completeness in this literature, Artesyn Embedded Technologies assumes no responsibility, and disclaims all liability for damages resulting from use of this information or for any errors or omissions. Artesyn Embedded Technologies, Artesyn and the Artesyn Embedded Technologies logo are trademarks and service marks of Artesyn Embedded Technologies, Inc. All other names and logos referred to are trade names, trademarks, or registered trademarks of their respective owners.
© 2014 Artesyn Embedded Technologies, Inc.

For more information: www.artesyn.com/power
For support: productsupport.ep@artesyn.com

AV050 Series-DS Rev. 05.19.14