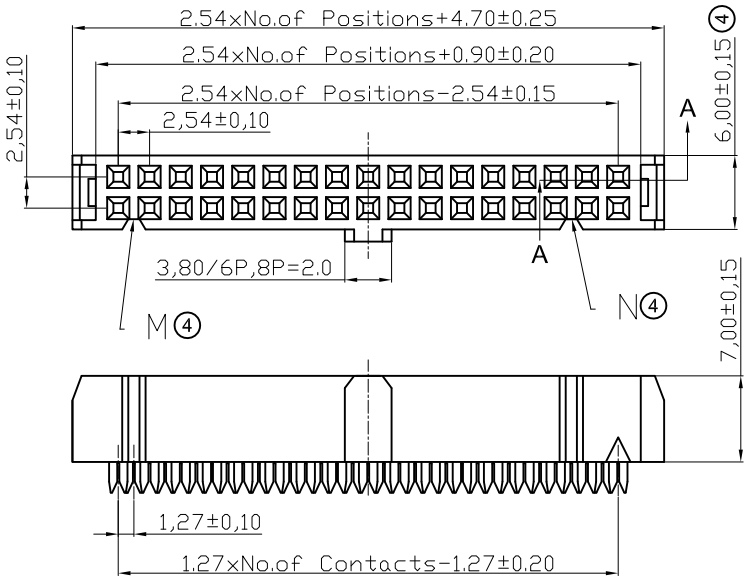



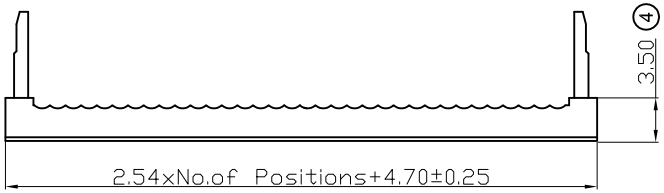



NOTES:

MATERIAL
1.Insulator Material:PBT+30%GF(UL94V-0)
2.Contact Material : Brass
3.Contact Plating :
AWP xx-7240-T : Gold flash over Ni
AWP xx-7540-T : Tin over NI

ELECTRICAL
1.Current Rating : 3AMP
2.Withstand Voltage : 1000V AC/DC
3.Contact Resistance : 20mΩ max
4.Insulation Resistance: 1000MΩ min

ENVIRONMENTAL
1.Operation Temperature: -40°C to +105°C
2.Packing: Tray

④ 6P-8P Without Slot "M" and "N"
10P-12P With Slot "M" ,Without Slot "N"
14P-64P With Slot "M" and "N"

⑥ Wire Spec: AWG28



Section A-A

RoHS compliant

File No.: E198287 ⑤

Scale	Free
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°

Id.	Modification	Date	Name		Date	Name
⑥	Add wire spec	14.02.2014	Amy			
⑤	Add the UL-File No	13.12.2013	Winnie	Drawn	25.01.2006	Alex
④	Update	27.03.2013	Winnie	Approved	14.02.2014	Amy
③	New p/n added	21.12.2009	Dean			
②	Redraw	13.03.2009	Dean			
①	Drawn	25.01.2006	Alex			

ASSMANN WSW components

Customer-No.

ASSMANN WSW-No.
AWP xx-7x40-T

Drawing-No.
ASS 1194C CO

rev06

Replace

Sheet