
# CRYSTAL/CRYSTAL OSCILLATOR TEST & BURN IN SOCKET



AXS-5032-04-07

Precision test socket for 5X3.2mm, 4 pad crystal and oscillator packages.

Pb RoHS Compliant


## FEATURES:

- Accurate and reliable testing of frequency control devices
- Contact force ideal for avoiding measurement error
- Highest quality socket available
- Clam shell design for easy open and close
- Reliable gold plated POGO pins
- Suitable for high temperature burn-in test
- Operating Temperature: -30 ~ +150˚C


## APPLICATIONS:

- Design stage component engineering evaluation
- Supplier comparison tests
- High temperature burn-in board testing
- Prototyping


## SIDE VIEW (OPEN):

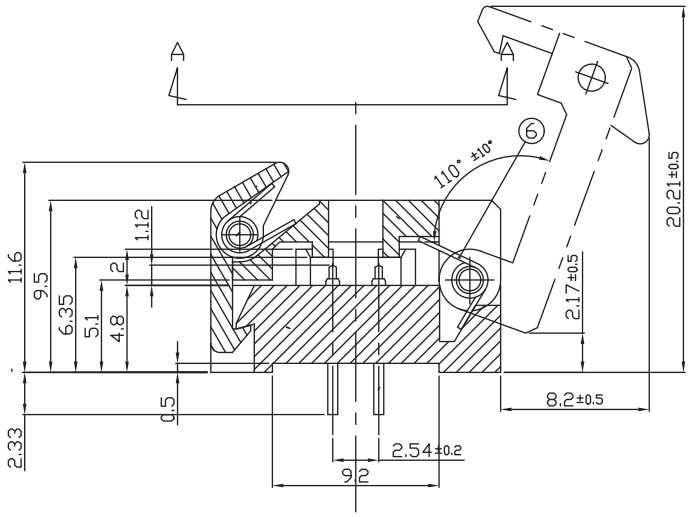



## POCKET TOP VIEW:

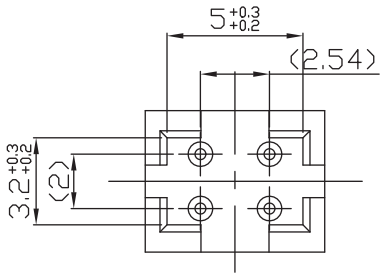



## PIN DIMENSIONS:




## END VIEW:

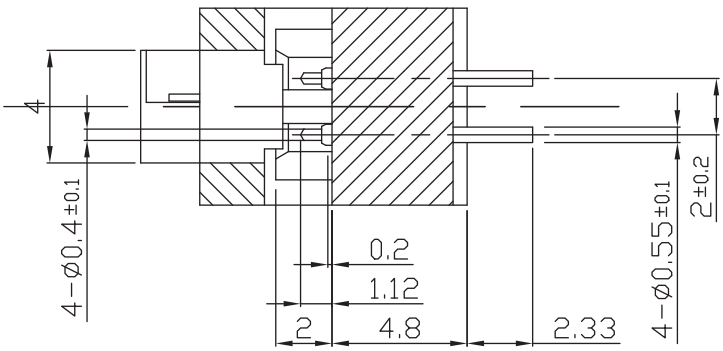


## SUITABLE CRYSTAL/CRYSTAL OSCILLATOR PACKAGE DIMENSIONS:

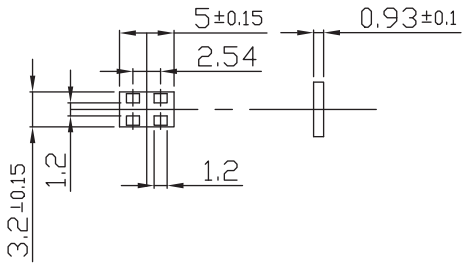


Dimensions: mm

## ORDERING INFORMATION:

When ordering, please refer to part number

**AXS-5032-04-07**

## RECOMMENED FOR USE WITH DEVICE PACKAGE DIMENSIONS:

**5.0 x 3.2 x 0.93mm**

## COMPATIBLE ABRACON SURFACE MOUNT CRYSTAL/OSCILLATOR

ABM3B, ASFLM

(for a pdf download go to http://www.abracon.com/oscillators.htm)

** ABRACON test and burn in sockets are compatible with all industry standard frequency control packages.*

ABRACON IS ISO 9001 / QS 9000 CERTIFIED

ABRACON CORPORATION


Visit www.abracon.com for Terms & Conditions of Sale **Revised: 07.13.09**

30332 Esperanza, Rancho Santa Margarita, California 92688

tel 949-546-8000 | fax 949-546-8001 | www.abracon.com