

Main Feature

1. High reliability in dry circuit condition.
2. 2.54mm terminal pitch employment equivalent to I.C. Terminal.
3. Two types of coil sensitivity for design flexibility.
4. IC compatibility due to its low power consumption.



Contact Rating

Load Type	AZ (DM/LM)	AZ (D/L)
Rated Load (Resistive)	1A 120VAC	1A 120VAC
	1A 24VDC	1A 24VDC
Rated Carrying Current	1A	1A
Max. Allowable Voltage	AC 120V	AC 120V
	DC 60V	DC 60V
Max. Allowable Current	1A	1A
Max. Allowable Power Force	120VA	120VA
	24W	24W
Min. Switching Load	DC 1V, 1mA	DC 1V, 1mA
Contact Material	Ag Alloy	Ag Alloy
Contact Form	SPST	SPDT

Application

Telecommunication, Domestic Appliances, Office Machine, Audio Equipment, etc.

Performance (at Initial Value)

- Contact Resistance 100mΩ Max. @100mA, 6VDC
- Operate Time..... 5 mSec. Max. (D Type)
10 mSec. Max. (L Type)
- Release Time 4 mSec. Max.
- Dielectric Strength:
Between Coil & Contact 500VAC at 50/60 Hz for one minute.
Between Contacts 500VAC at 50/60 Hz for one minute.
- Surge Strength 1,000V (between coil & contact 1.2x50μSec.)
- Insulation Resistance 100 Mega Ω Min. at 500VDC.
- Max. On/Off Switching:
Electrical 30 Cycles per Minute.
Mechanical 300 Cycles per Minute.

- Temperature Range -30~55°C (D Type)
-30~75°C (L Type)
- Humidity Range 45~85% RH.
- Coil Temperature Rise 43°C Max. (D Type)
25°C Max. (L Type)
- Vibration:
Endurance 10 to 55 Hz dual amplitude width 1.5mm.
Error Operation..... 10 to 55 Hz dual amplitude width 1.5mm.
- Shock:
Endurance 500 m/S².
Error Operation..... 100 m/S².
- Life Expectancy:
Mechanical 10⁷ Operations at No Load condition.
Electrical 10⁵ Operations at Rated Resistive Load.
- Weight..... About 3.5 g.

Safety Standard & File Number

- UL & C-ULE141060
- TÜVR50192493

Coil Specification (at 20°C)

Coil Sensitivity	Nominal Voltage (VDC)	Nominal Current (mA)	Coil Resistance ($\Omega \pm 10\%$)	Power Consumption (W)	Pull-In Voltage (VDC)	Drop-Out Voltage (VDC)	Maximum Allowable Voltage (VDC)
AZ-D	3	150	20	Abt. 0.45	70% Maximum	5% Minimum	130%
	5	89	56				
	6	75	80				
	9	50	180				
	12	37.5	320				
	24	18.8	1,280				
AZ-L	3	66.7	45	Abt. 0.20	75% Maximum	5% Minimum	130%
	5	40	125				
	6	33.3	180				
	9	22.5	400				
	12	17	700				
	24	8.6	2,800				

Ordering Information

AZ - SS - 1 12 D M

Contact Form:

Nil: One Form C

M: One Form A

Coil Type:

D: Standard DC Coil

L: High Sensitivity DC Coil

Coil Voltage:

03: 3V, 05: 5V, 06: 6V, 09: 9V, 12: 12V, 24: 24V

Number of Pole:

1: One Pole

Type of Sealing:

SS: RT II Flux Proofed Relays

SH: RT III Wash Tight Relays





Type:

AZ

Classification

Model	AZ			
Coil Sensitivity	Standard Type		High Sensitivity Type	
Contact Form	1C	1A	1C	1A
Flow Solder Type	AZ-SS-1□□D	AZ-SS-1□□DM	AZ-SS-1□□L	AZ-SS-1□□LM
Plastic Sealed Type	AZ-SH-1□□D	AZ-SH-1□□DM	AZ-SH-1□□L	AZ-SH-1□□LM

Dimension ($\leq 5\text{mm} \pm 0.2\text{mm}$, $> 5\text{mm} \pm 0.3\text{mm}$, the tolerance of PCB thru hole: $+0.1\text{mm}$)

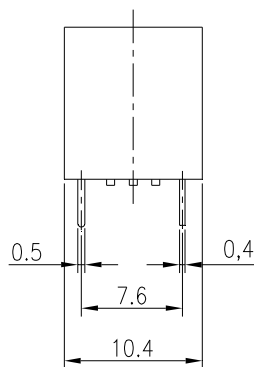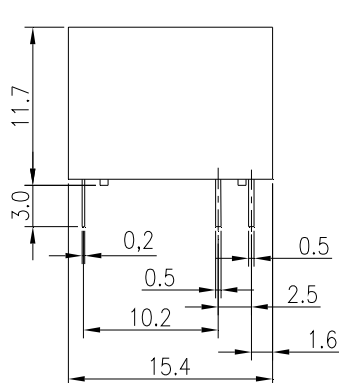

Bottom View