Features

- ESD/Surge Protection for 1 Line with Bidirectional.
- Provide ESD protection for each line to
  IEC 61000-4-2 (ESD) ±20kV (air / contact)
  IEC 61000-4-4 (EFT) 80A (5/50ns)
  IEC 61000-4-5 (Lightning) 10A (8/20μs)
- Suitable for, **15V** and below, operating voltage applications
- Low capacitance : 1.8pF typical
- High surge protection
- Fast turn-on and low clamping voltage
- Solid-state silicon-avalanche and active circuit triggering technology
- ***Green Part***

Applications

- xDSL Line Protection
- WAN/LAN Device
- 10/100/1000 Ethernet
- Power Supply Protection
- USB Interface Protection
- RF Interface Protection
- Peripherals


Description

AZ4615-01L is a design which includes a bi-directional ESD rated clamping cell to protect one power line, or one control line, or one high speed data line in an electronic system. The AZ4615-01L has been specifically designed to protect sensitive components which are connected to data and transmission lines from over-voltage caused by Electrostatic Discharging (ESD), Electrical Fast Transients (EFT), Lightning, and Cable Discharge Event (CDE).

AZ4615-01L is a unique design which includes proprietary clamping cell in a single package. During transient conditions, the proprietary clamping cell prevents over-voltage on the power line or control/data lines, protecting any downstream components.

AZ4615-01L may be used to meet the ESD immunity requirements of IEC 61000-4-2, Level 4 (±15kV air, ±8kV contact discharge).

Circuit Diagram / Pin Configuration

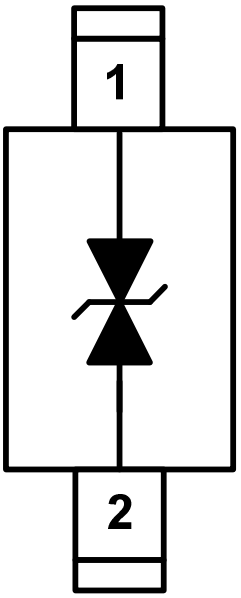

SOD-323 (Top View)

SPECIFICATIONS


ABSOLUTE MAXIMUM RATINGS			
PARAMETER	**SYMBOL**	**RATING**	**UNITS**
Peak Pulse Current (tp=8/20μs)	I_{PP}	10	A
Operating Supply Voltage	V_{DC}	±16.5	V
ESD per IEC 61000-4-2 (Air) ESD per IEC 61000-4-2 (Contact)	V_{ESD}	±20 ±20	kV
Lead Soldering Temperature	T_{SOL}	260 (10 sec.)	℃
Operating Temperature	T_{OP}	-55 to +125	℃
Storage Temperature	T_{STO}	-55 to +150	℃


ELECTRICAL CHARACTERISTICS						
PARAMETER	**SYMBOL**	**CONDITIONS**	**MINI**	**TYP**	**MAX**	**UNITS**
Reverse Stand-Off Voltage	V_{RWM}	T=25 ℃	-15		15	V
Reverse Leakage Current	I_{Leak}	V_{RWM} = ±15V, T=25 ℃			1	μA
Reverse Breakdown Voltage	V_{BV}	I_{BV} = 1mA, T=25 ℃	17		21	V
Surge Clamping Voltage	$V_{CL-surge}$	I_{PP}= 5A, tp=8/20μs, T=25 ℃		23		V
		I_{PP}= 10A, tp=8/20μs, T=25 ℃		27		
ESD Clamping Voltage (Note 1)	V_{clamp}	IEC 61000-4-2, +8kV (I_{TLP} = 16A), Contact mode, T=25 ℃		27		V
ESD Dynamic Turn-on Resistance	$R_{dynamic}$	IEC 61000-4-2, 0~+8kV, T=25 ℃, Contact mode		0.4		Ω
Channel Input Capacitance	C_{IN}	V_R = 0V, f = 1MHz, T=25 ℃		1.8	2.5	pF


Note 1: ESD Clamping Voltage was measured by Transmission Line Pulsing (TLP) System.

TLP conditions: Z_0= 50Ω, t_p= 100ns, t_r= 1ns.

Typical Characteristics

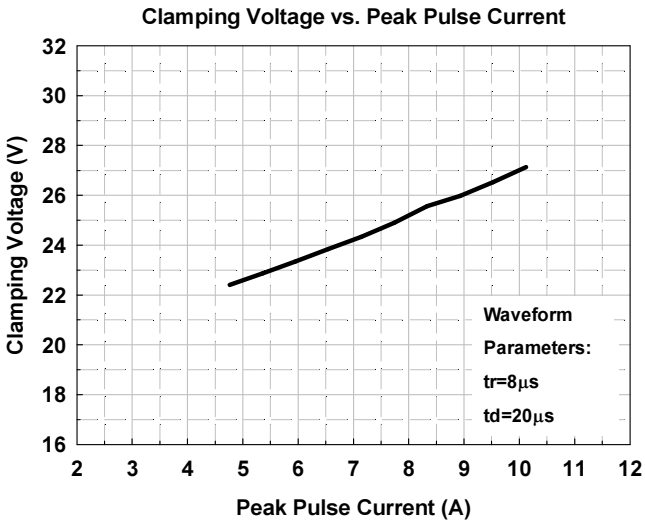

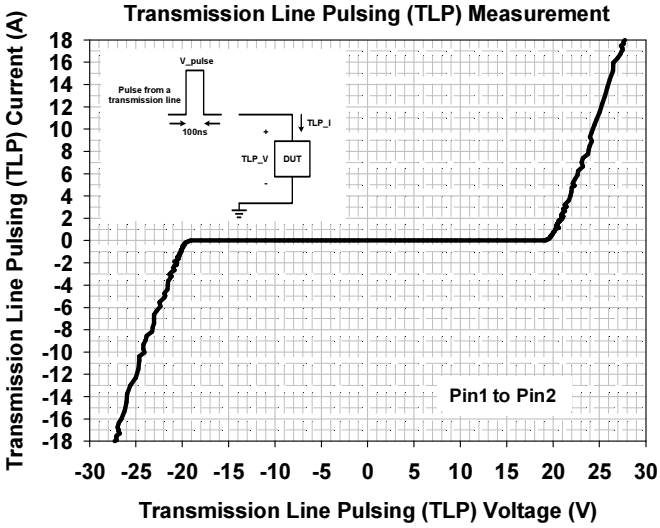

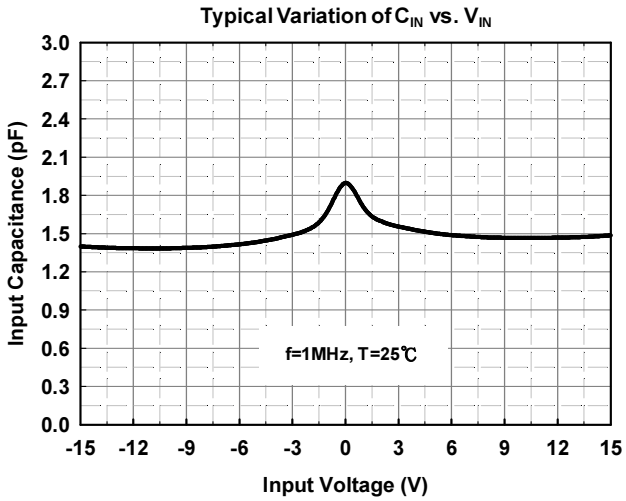

Applications Information

The AZ4615-01L is designed to protect one line against System ESD/EFT/Lightning pulses by clamping it to an acceptable reference. It provides bidirectional protection.

The usage of the AZ4615-01L is shown in Fig. 1. Protected line, such as data line, control line, or power line, is connected at pin 1. The pin 2 is connected to a ground plane on the board. In order to minimize parasitic inductance in the board traces, all path lengths connected to the pins of AZ4615-01L should be kept as short as possible.

In order to obtain enough suppression of ESD induced transient, good circuit board is critical. Thus, the following guidelines are recommended:

- Minimize the path length between the protected lines and the AZ4615-01L.
- Place the AZ4615-01L near the input terminals or connectors to restrict transient coupling.
- The ESD current return path to ground should be kept as short as possible.
- Use ground planes whenever possible.
- NEVER route critical signals near board edges and near the lines which the ESD transient easily injects to.

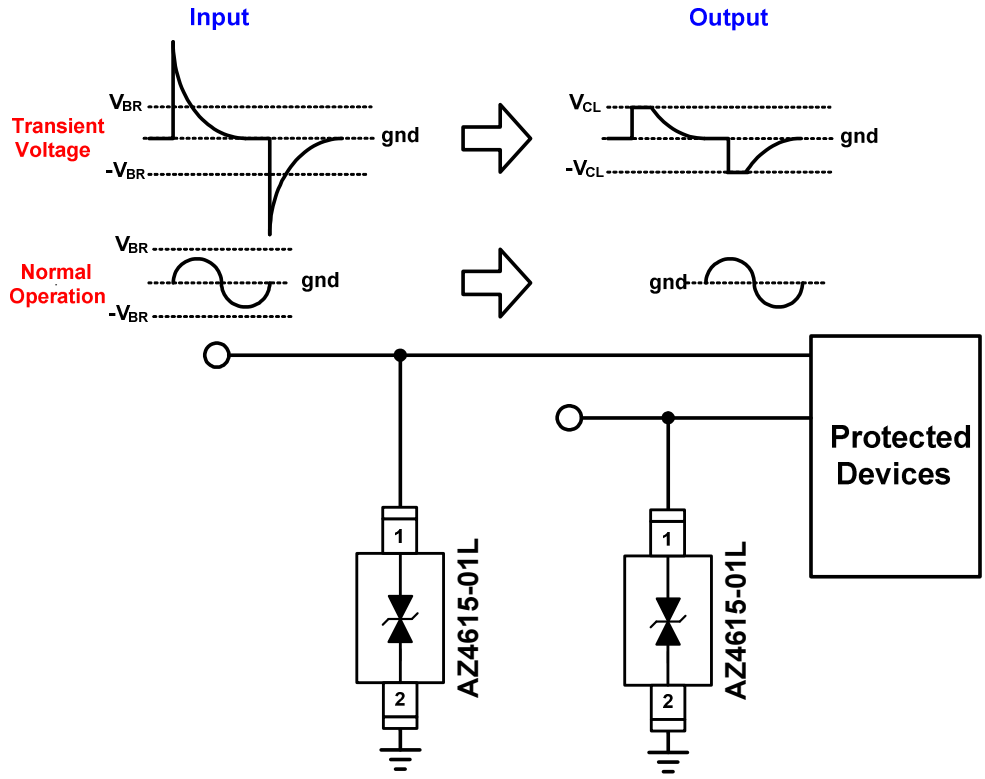


Fig. 1

Fig. 2 shows another simplified example of using AZ4615-01L to protect the control line, high speed data line, and power line from ESD transient stress.

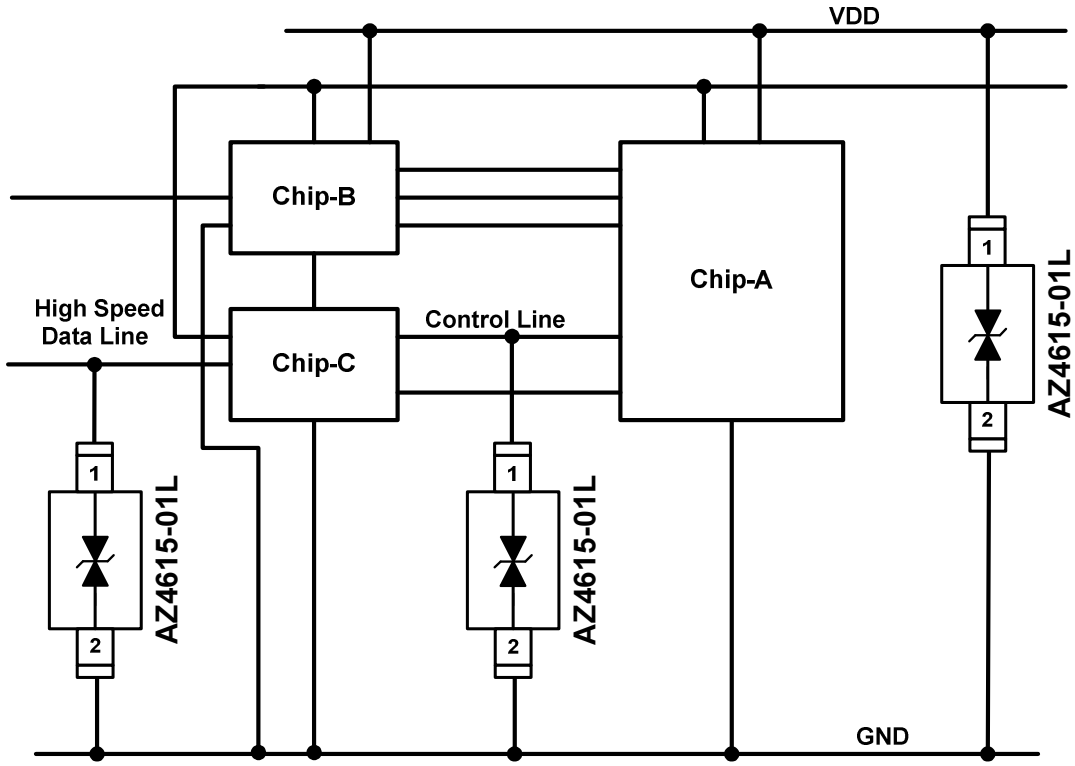



Fig. 2

Mechanical Details


SOD-323

PACKAGE DIAGRAMS


TOP VIEW

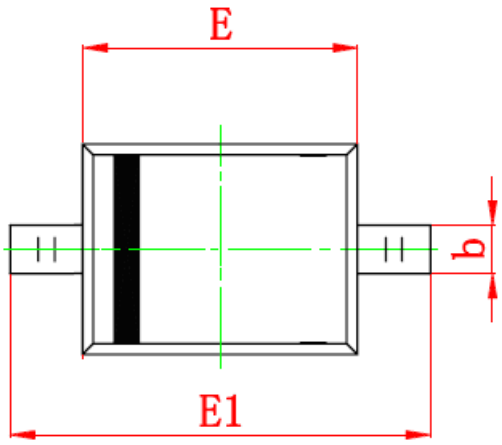

SIDE VIEW

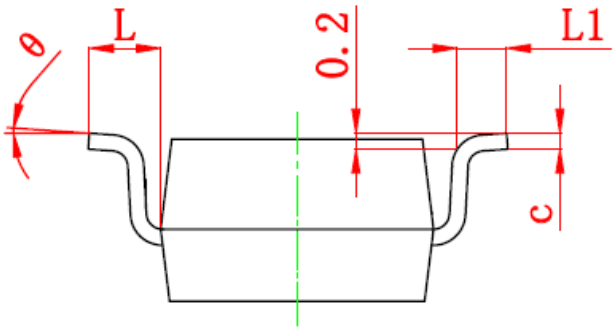


END VIEW

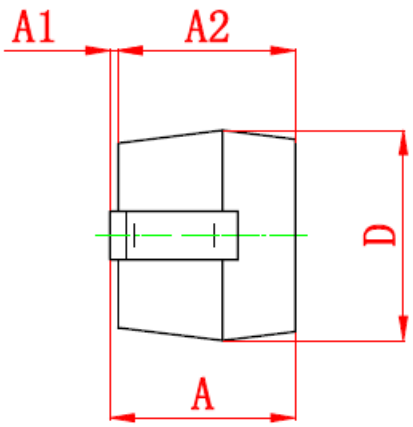

PACKAGE DIMENSIONS

Symbol	Millimeters		Inches	
	MIN.	MAX.	MIN.	MAX.
A	0.8	1.0	0.031	0.039
A1	0	0.1	0.000	0.004
A2	0.8	0.9	0.031	0.035
b	0.25	0.35	0.010	0.014
C	0.08	0.15	0.003	0.006
D	1.2	1.4	0.047	0.055
E	1.6	1.8	0.063	0.071
E1	2.5	2.7	0.098	0.106
L	0.475REF		0.019 REF	
L1	0.25	0.4	0.010	0.016
θ	0°	8°	0°	8°


LAND LAYOUT

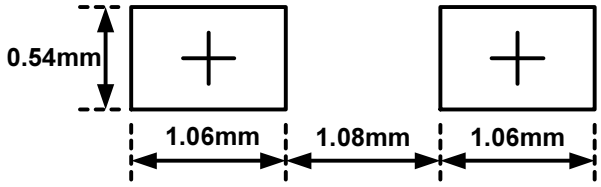

Notes:

This LAND LAYOUT is for reference purposes only. Please consult your manufacturing partners to ensure your company's PCB design guidelines are met.

MARKING CODE

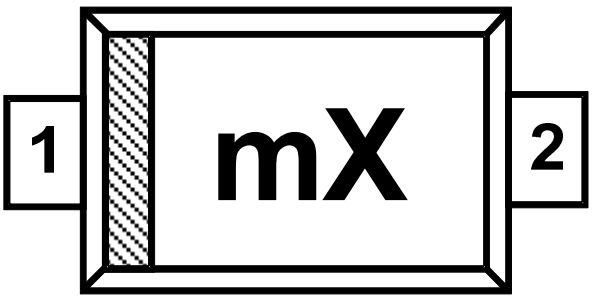

Top View

m = Device Code
X = Date Code

Part Number	Marking Code
AZ4615-01L.R7G (Green Part)	mX

Note. Green means Pb-free, RoHS, and Halogen free compliant.

Ordering Information

PN#	Material	Type	Reel size	MOQ	MOQ/internal box	MOQ/carton
AZ4615-01L.R7G	Green	T/R	7 inch	3,000/reel	4 reels= 12,000/box	6 boxes =72,000/carton

Revision History

Revision	Modification Description
Revision 2015/09/22	Preliminary Release.
Revision 2017/05/11	Formal Release.