
B140HB

1.0A SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER

NEW PRODUCT

Features

- Ultra-low Leakage Current
- Guard Ring Die Construction for Transient Protection
- Ideally Suited for Automatic Assembly
- Low Power Loss, High Efficiency
- Surge Overload Rating to 45A Peak
- Plastic Material: UL Flammability Classification Rating 94V-0

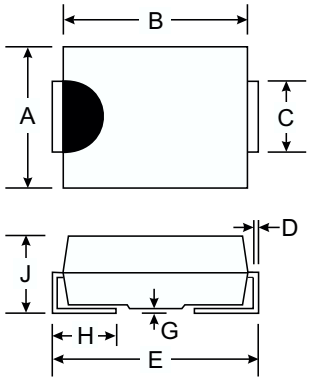

SMB		
Dim	**Min**	**Max**
A	3.30	3.94
B	4.06	4.57
C	1.96	2.21
D	0.15	0.31
E	5.00	5.59
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62
All Dimensions in mm		

Mechanical Data

- Case: Molded Plastic
- Terminals: Solder Plated Terminal - Solderable per MIL-STD-202, Method 208
- Marking: Type Number
- Polarity: Cathode Band or Cathode Notch
- Weight: 0.093 grams (approx.)
- Mounting Position: Any

Maximum Ratings and Electrical Characteristics @ T_A = 25°C unless otherwise specified

Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

Characteristic	Symbol	B140HB	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage @ I_R = 0.1mA	V_{RRM} V_{RWM} V_R	40	V
RMS Reverse Voltage	$V_{R(RMS)}$	28	V
Average Rectified Output Current @ T_T = 115°C	I_O	1.0	A
Non-Repetitive Peak Forward Surge Current 8.3ms Single half sine-wave superimposed on rated load	I_{FSM}	45	A
Non-Repetitive Peak Forward Surge Current 5μs Single half sine-wave	I_{FSM}	430	A
Forward Voltage @ I_F = 1.0A, @ T_j = 25°C @ I_F = 2.0A, @ T_j = 25°C @ I_F = 1.0A, @ T_j = 125°C @ I_F = 2.0A, @ T_j = 125°C	V_{FM}	0.53 0.70 0.49 0.64	V
Peak Reverse Current @ T_A = 25°C at Rated DC Blocking Voltage @ T_A = 125°C	I_{RM}	0.1 4.0	mA
Typical Junction Capacitance (Note 2)	C_j	80	pF
Max. Voltage Rate of Change @ Rated V_R	dv/dt	5300	V/μs
Typical Thermal Resistance Junction to Terminal (Note 1)	$R_{\theta JT}$	36	K/W
Operating and Storage Temperature Range	T_j, T_{STG}	-55 to +150	°C

Notes: 1. Thermal Resistance: Junction to terminal, unit mounted on PC board with 5.0 mm^2 (0.013 mm thick) copper pads as heat sink.
2. Measured at 1.0MHz and applied reverse voltage of 5.0V DC.

NEW PRODUCT

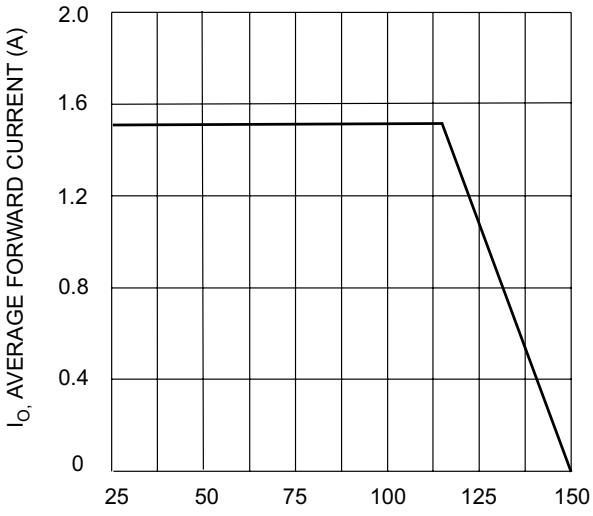


Fig. 1 Forward Current Derating Curve

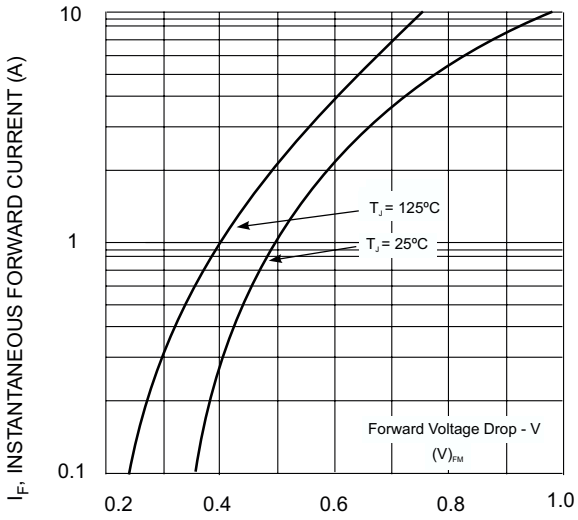


Fig. 2 Typ. Forward Characteristics

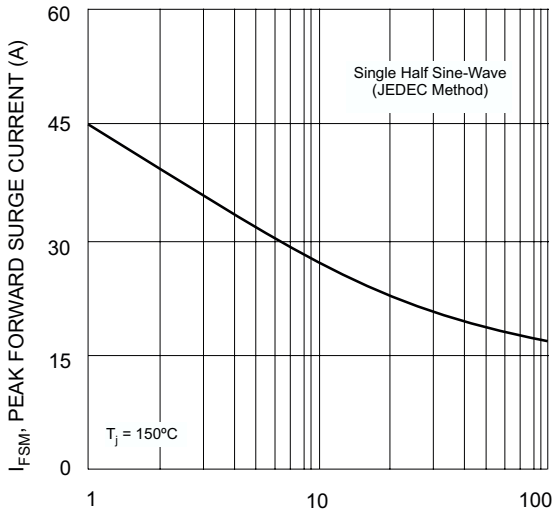


Fig. 3 Max Non-Repetitive Peak Fwd Surge Current

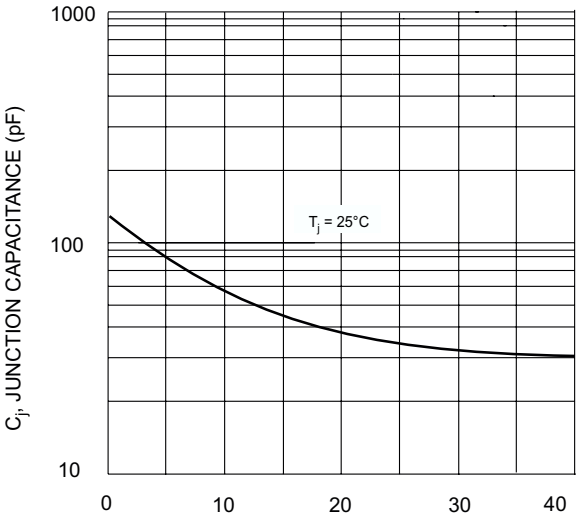


Fig. 4 Typical Junction Capacitance

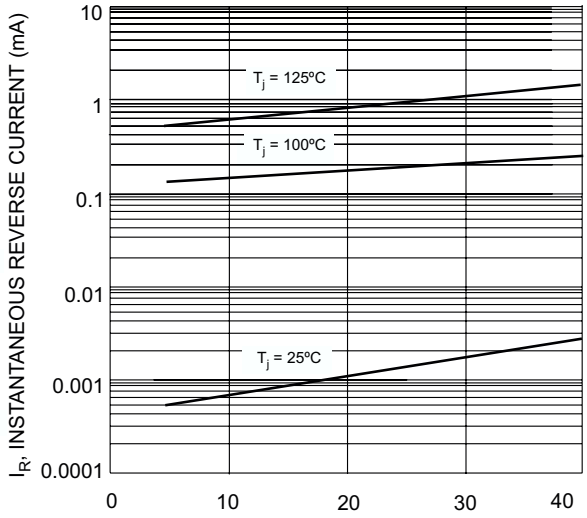


Fig. 5 Typical Reverse Characteristics