
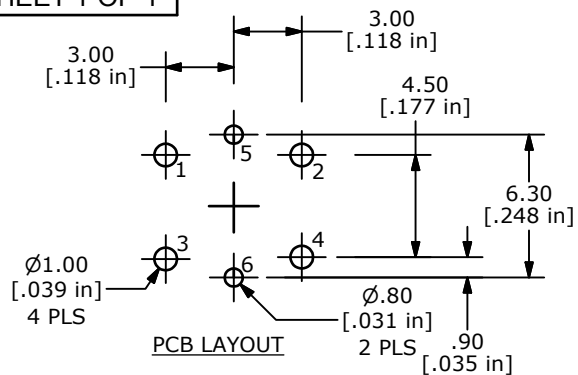
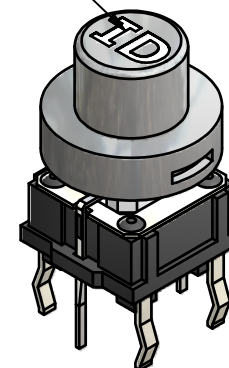
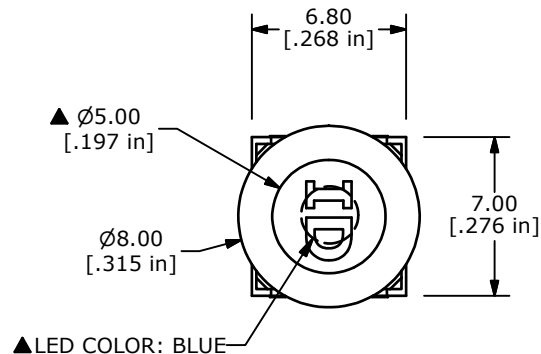


NOTES:

1. ALL DIMENSIONS IN MM
2. GENERAL TOLERANCE: X.X=±0.4
X.XX=±0.25
3. RATING: 50mA, 12VDC
- ▲ 4. TRAVEL: 0.2 ±0.1
5. OPERATING FORCE: 160±50gf
6. CONTACT RESISTANCE: 100m-Ohms Max
7. CONTACT MATERIAL: SILVER
8. OPERATING LIFE: 500,000 CYCLES
9. INSULATION RESISTANCE: 100M-Ohms Min
10. DIELECTRIC STRENGTH: 500VDC FOR 1 MINUTE
- ▲ 11. LED COLOR: BLUE
12. OPERATING TEMPERATURE: -20° C TO 70° C
13. 2002/95/EC (ROHS) COMPLIANT
14. ▲ DENOTES CRITICAL PARAMETER



▲ DOT TO INDICATE
CATHODE SIDE

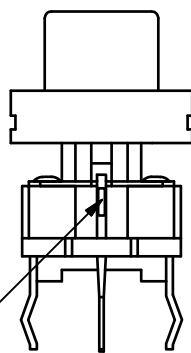

THESE SURFACES
TO BE FREE OF
ALL VOIDS AND
BLEMISHES

▲ CAP COLOR: BLACK
PES MATERIAL

WHITE INK DOT
TO INDICATE
PIN 1

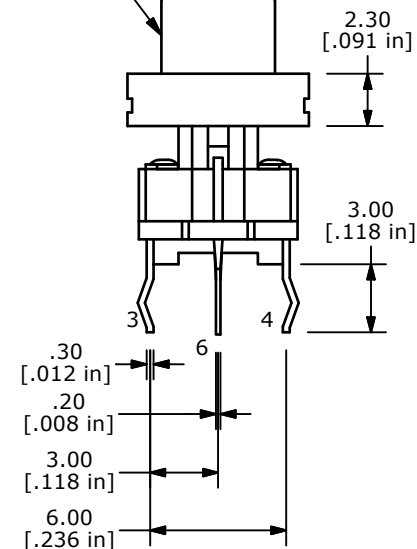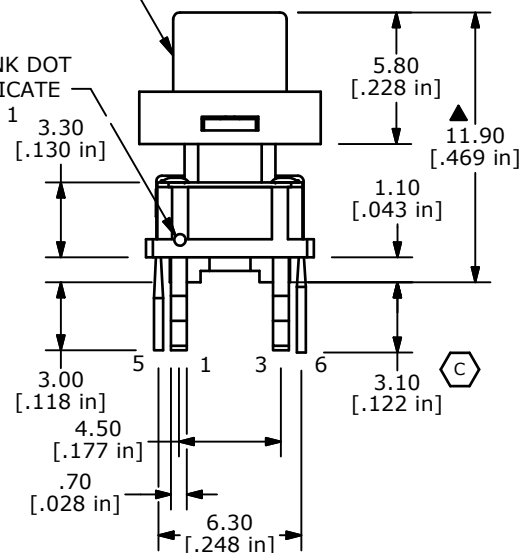

▲ LED SPECS	UNITS	BLUE LED
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.9 TYP. - 4.0 MAX
LUMINOUS INTENSITY	mcd	150 TYP.

E	20196	ADD SURFACE NOTE	10/05/11	BGL
D	20065	CORRECT GRAPHICS ORIENTATION	07/19/11	BMA
C	20002	ADD DOT MARKINGS & DIM WAS 5.0	6/14/11	BGL
REV	PCR NO	DESCRIPTION	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY
TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED



TITLE TL1265BQSBLK-ID

SCALE 3:1

DATE 1/12/2011

DR BA

DWG B200021

REV E