


SHEET 1 OF 1

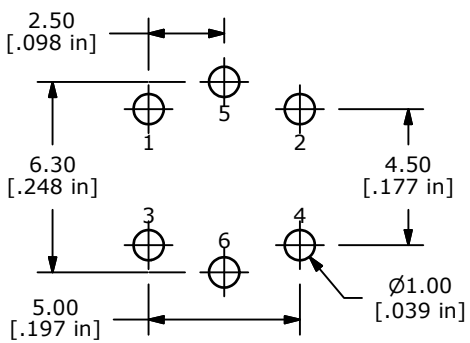

▲ LED SPECS	UNITS	GREEN	YELLOW
FORWARD CURRENT	mA	20	20
FORWARD VOLTAGE	V	2.0 TYP. - 2.5 MAX	2.0 TYP. - 2.5 MAX
LUMINOUS INTENSITY	mcd	120 TYP.	200 TYP.

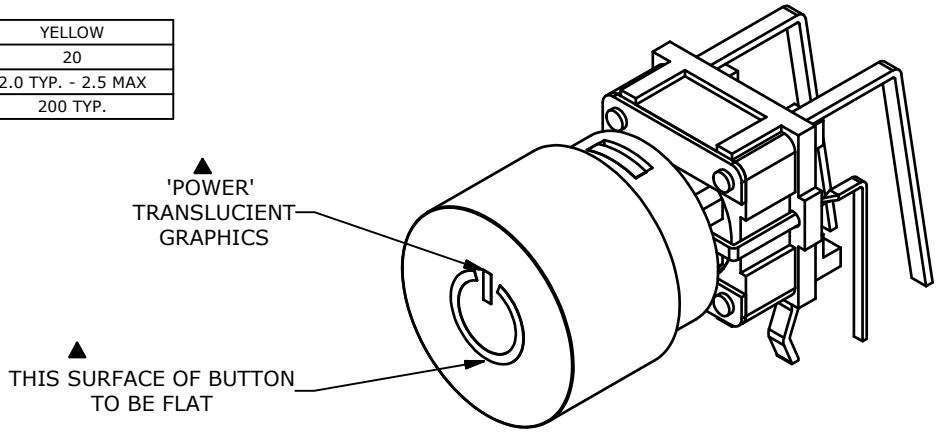


P.C.B. LAYOUT



CIRCUIT: SPST

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN.
▲6. OPERATING FORCE: 160± 50gf
7. TRAVEL: 0.2± 0.1mm
8. OPERATING TEMPURATURE: -20˚C TO 70˚C
9. OPEREATING LIFE 500,000 CYCLES (B)
▲10. LED COLOR: GREEN / YELLOW
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT
13. PACKAGING: 100 PIECES PER TRAY (E)

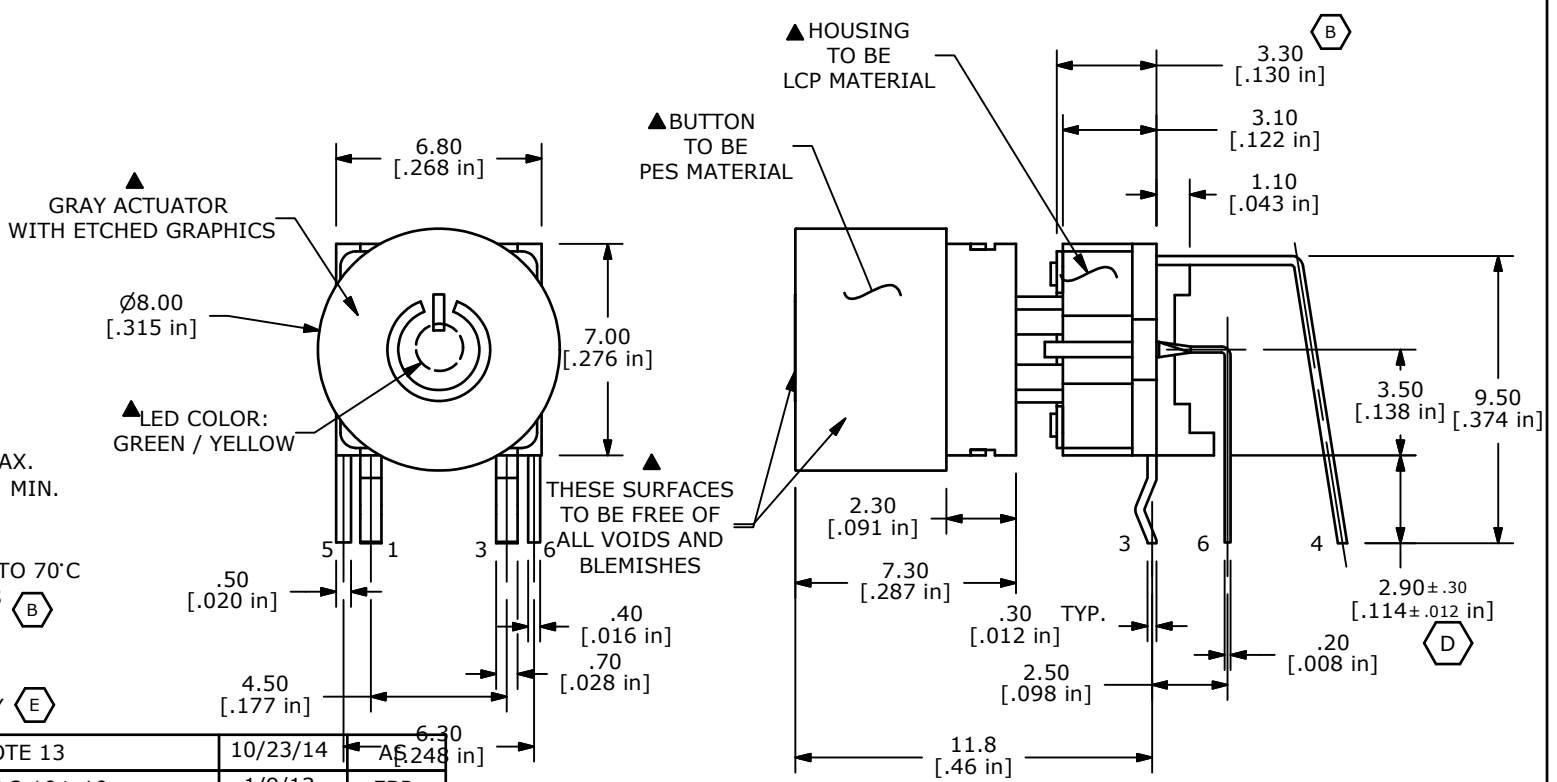

REV	PCR NO	DESCRIPTION	DATE	BY
E	21662	ADDED NOTE 13	10/23/14	AS
D	20959	2.90±.30 WAS 3.10±.10	1/9/13	EBP
C	20196	ADD SURFACE NOTE	10/05/11	BGL
B	19969	CHANGED NOTE 9. AND DIM WAS 3.5	5/27/11	BGL
A	19937	RELEASE FOR PRODUCTION	5/11/11	BGL

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE TL1260GYQC1GRY-PWRVERT

SCALE	DATE	DR	DWG	REV
4:1	5/11/2011	BGL	B200052	E