


SHEET 1 OF 1

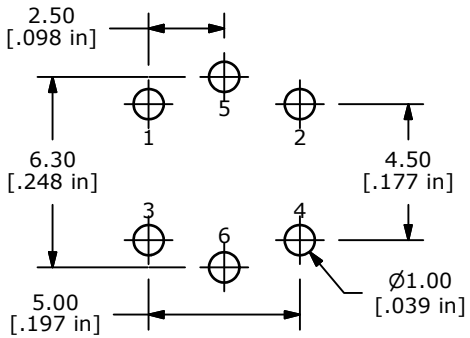


P.C.B. LAYOUT


LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	2.9 TYP. - 4.0 MAX
LUMINOUS INTENSITY	mcd	150 TYP.
WAVELENGTH	nm	460 MIN. - 467 MAX.

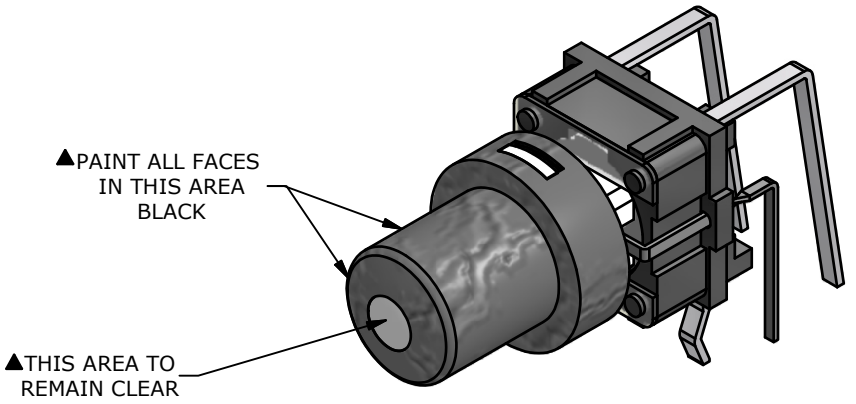



CIRCUIT: SPST

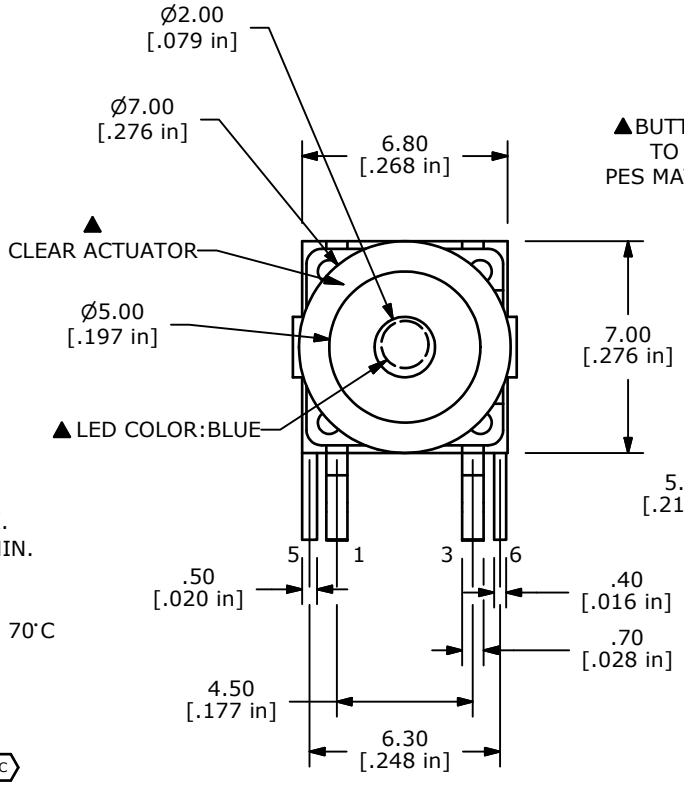

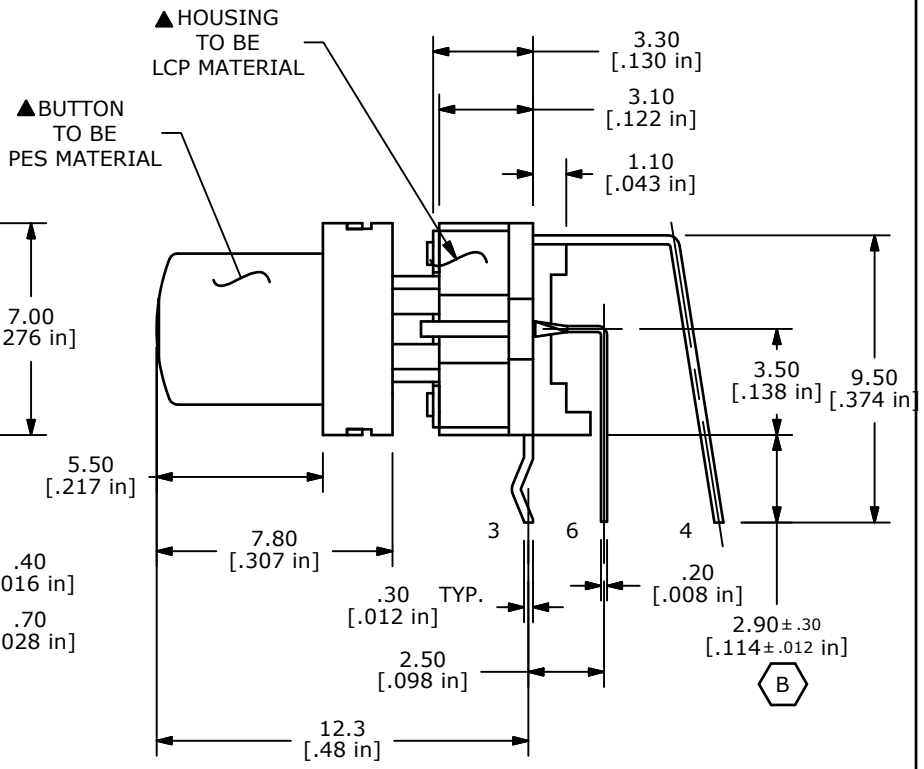

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. RATING: 12VDC @ 50mA
4. CONTACT RESISTANCE: 100mΩ MAX.
5. INSULATION RESISTANCE: 100MΩ MIN.
▲6. OPERATING FORCE: 160± 50gf
7. TRAVEL: 0.2± 0.1mm
8. OPERATING TEMPURATURE: -20˚C TO 70˚C
9. OPEREATING LIFE 500,000 CYCLES
▲10. LED COLOR: BLUE
11. ▲ DENOTES CRITICAL PARAMETER
12. 2002/95/EC (ROHS) COMPLIANT
13. PACKAGING: 100 PIECES PER TRAY (C)

REV	PCR NO	DESCRIPTION	DATE	BY
C	21660	ADDED NOTE 13	10/23/14	AS
B	20959	2.90±.30 WAS 3.10±.10, FIX TITLE	1/9/13	EBP
A	20477	RELEASE FOR PRODUCTION	02/13/12	BMA

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE TL1260BQC2CLR2MMDOT (B)

SCALE	DATE	DR	DWG	REV
4:1	2/13/2012	BMA	B200053	C