

MATERIAL AND FINISH:
Insulator: Glass filled Nylon, black, UL-94-HB rated
Contacts: Phosphor Bronze, Tin plated
Spring: Spring Steel


ENVIRONMENTAL
Operating temperature: -30°C TO +70°C


RoHS COMPLIANT

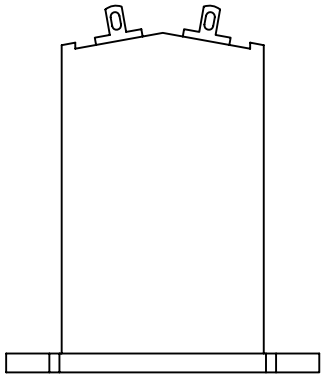


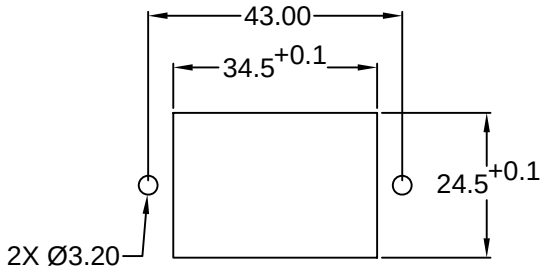


RECOMMENDED
PANEL CUTOUT

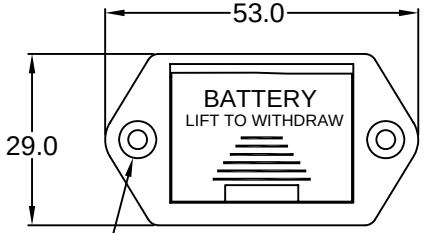

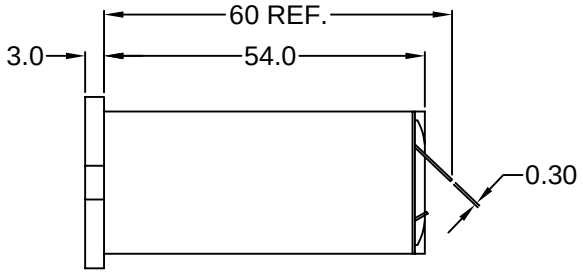
REVISIONS
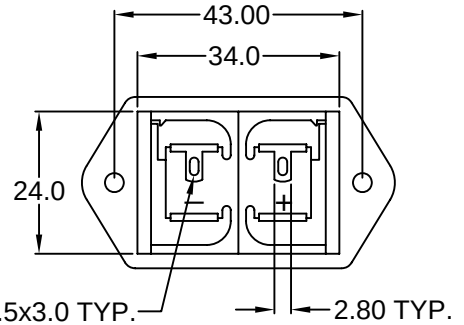
| REV | DATE | CHANGE | CHNG | CHCK | APPR |
|---|---|---|---|---|---|
| A | 12/98 | UPDATED DRAWING | SS | JD | AH |
| B | 12/27/99 | REVISED DIM & SPECS. | PB | TD | SS |
| C | 02/27/02 | REVISED / UPDATED | GQ | TD | PB |

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

| | | | |
|---|---|---|---|
| DRAWN BY | SS | DATE: | 1/11/95 |
| CHECK BY | JD | DATE: | 1/12/95 |
| APPR BY | AH | DATE: | 1/12/95 |

**Power Dynamics, Inc.**
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 1 CELL PP3 (6R61) 9V BATTERY HOLDER, PANEL MOUNT, SOLDER TERMINALS

PART #: B23

SHEET 1 of 1

SIZE: A

SCALE: NTS

ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS

REV: C