WEITRON

B320 thru B360

Surface Mount Schottky Barrier Rectifiers

Lead(Pb)-Free

REVERSE VOLTAGE
20 TO 60 VOLTS
FORWARD CURRENT
3.0 AMPERE

Features:

*For Surface Mount Application
*Metal-Semiconductor Junction With Guardring
*Epitaxial Construction
*Very Low Forward Voltage Drop
*High Current Capability
*Plastic Meterial Has UL Flammability Classification 94V-0
*For Use In Low , And Polarity Protection Applications



SMC(DO-214AB)

Mechanical Data

*Case : Molded Plastic
*Polarity :Indicated by cathode band
*Weight : 0.007 Ounce ,0.21 grams

SMC Outline Dimension

Unit:mm

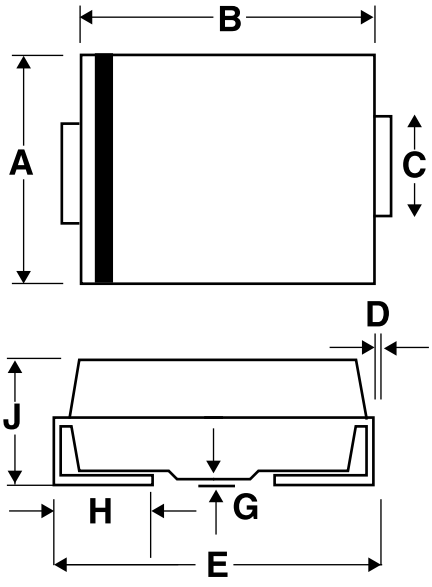

SMC		
Dim	**Min**	**Max**
A	5.59	6.22
B	6.60	7.11
C	2.75	3.18
D	0.15	0.31
E	7.75	8.13
G	0.10	0.20
H	0.76	1.52
J	2.00	2.62

Maximum Ratings and Electrical Characteristics

Rating 25°C Ambient Temperature Unless Otherwise Specified.
Single Phase Half Wave, 60Hz , Resistive or Inductive Load.
For Capacitive Load, Derate Current by 20%.

Characteristic	Symbol	B320	B330	B340	B350	B360	Unit
Maximum Recurrent Peak Reverse Voltage	VRRM	20	30	40	50	60	V
Maximum RMS Voltage	VRMS	14	21	28	35	42	V
Maximum DC Blocking Voltage	VDC	20	30	40	50	60	V
Maximum Average Forward Rectified Current @TC=100°C	IF(AV)	3.0					A
Peak Forward Surge Current, 8.3 ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	IFSM	100					A
Maximum Instantaneous At 3.0A DC	VF	0.5			0.7		V
Maximum DC Reverse Current @Tj=25°C At Rated DC Blocking Voltage @Tj=100°C	IR	0.5 20					mA
Typical Junction Capacitance (Note 1)	CJ	250					P_F
Typical Thermal Resistance (Note 2)	RθJL	10					°C/W
Operating Temperature Range	TJ	-55 to+125					°C
Storage Temperature Range	TSTG	-55 to+150					°C

NOTES:1.Measured at 1.0MHz applied reverse voltage of 4.0V DC.
2.Thermal Resistance Junction to case.

FIG.1 FORDWARD CURRENT DERATING CURVE

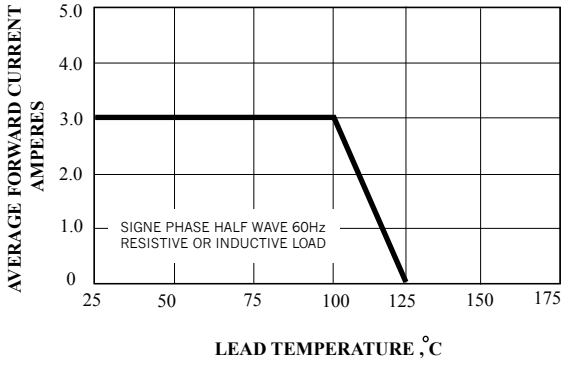

FIG.2 MAXIMUM NON-REPETITIVE SURGE CURRENT

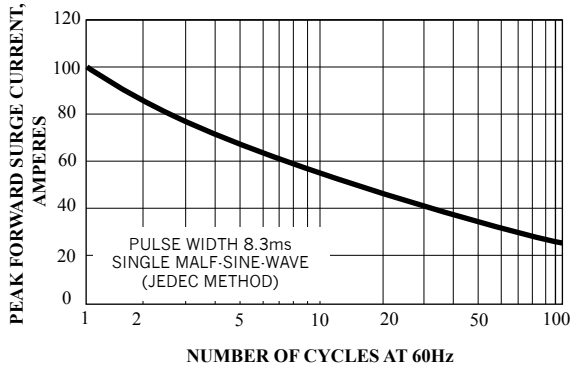

FIG.3 TYPICAL FORWARD CHARACTERISTICS

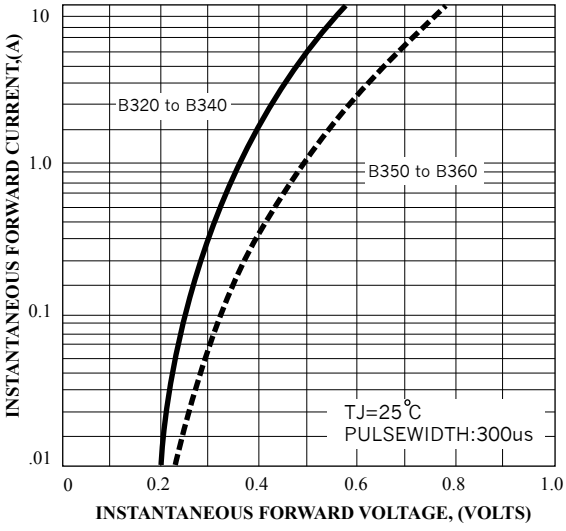

FIG.4 TYPICAL JUNCTION CAPACITANCE

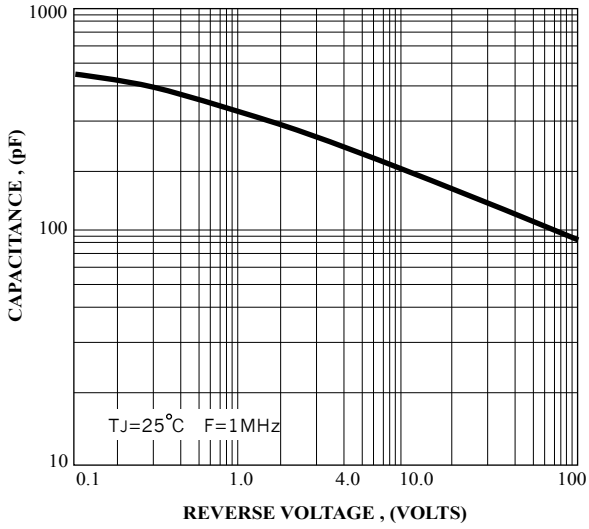

FIG.5 TYPICAL REVERSE CHARACTERISTICS

