

MATERIAL AND FINISH:
Insulator: Glass filled Nylon, black, UL-94-HB rated
Contacts: Clean Nickel Silver


ENVIRONMENTAL
Operating temperature: -30°C TO +70°C


RoHS COMPLIANT

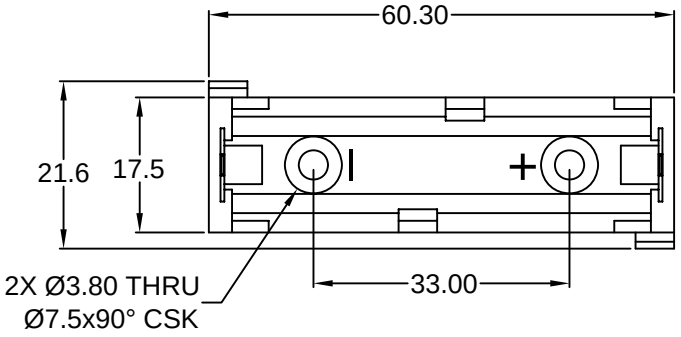

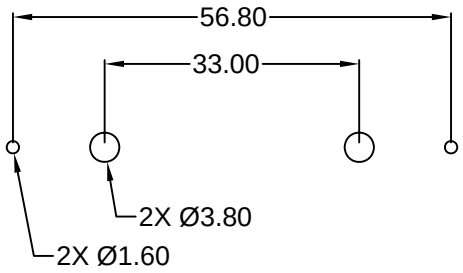

RECOMMENDED
PCB MOUNT

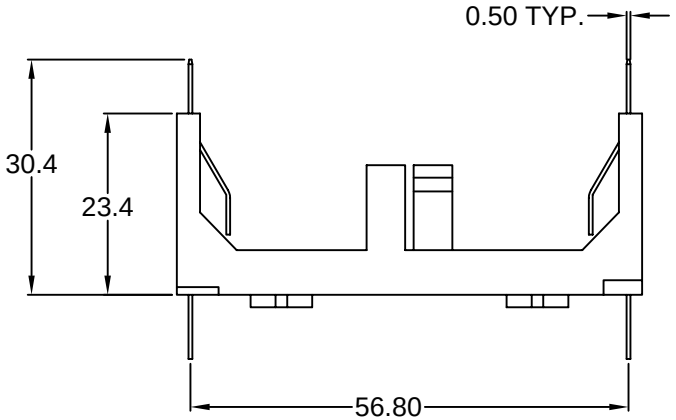

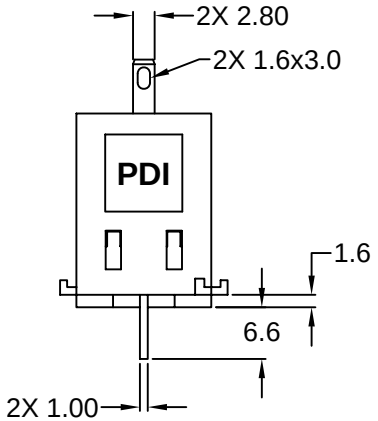

NOTES:
Dual connections. PC spills & 2.8 series tabs/solder tags(PC spills may be removed if required)

REVISIONS					
REV	DATE	CHANGE	CHNG	CHCK	APPR
A	03/04/02	REVISED / UPDATED	GQ	TD	PB

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	BP	DATE:	11/06/00
CHECK BY	TD	DATE:	11/06/00
APPR BY	JJ	DATE:	11/06/00

Power Dynamics, Inc.
Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 1 CELL AA (R6) BATTERY HOLDER, PCB/ BASEBOARD MOUNT, SOLDER TERMINALS

PART #: B35
SHEET 1 of 1
SIZE: A
SCALE: NTS
ALL DIMENSIONS FOR REFERENCE ONLY
DIMENSIONS ARE IN MILLIMETERS
REV: A