

6

5

4

3

2

1

MATERIAL AND FINISH:

Insulator: Glass filled Nylon, black,



UL-94-HB rated

Contacts: Clean Nickel Silver



ENVIRONMENTAL

Operating temperature: -30°C TO +70°C

RoHS
COMPLIANT

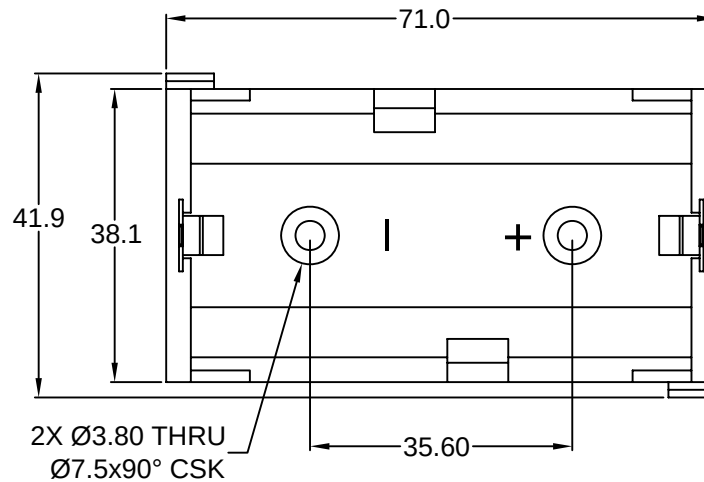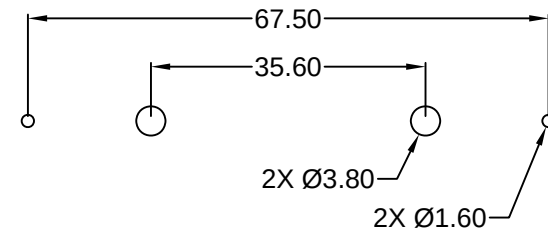

RECOMMENDED
PCB LAYOUT

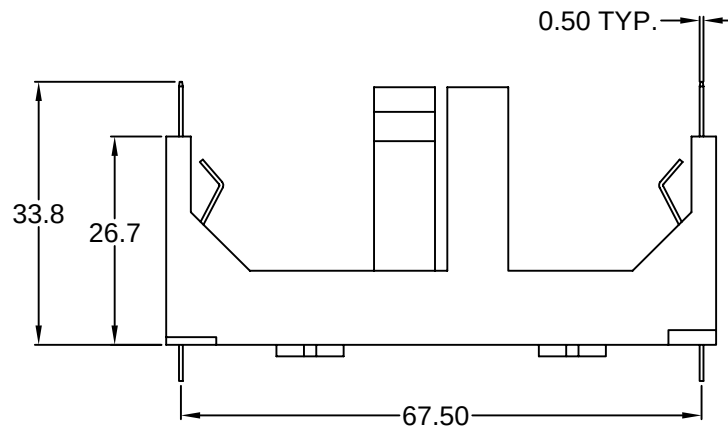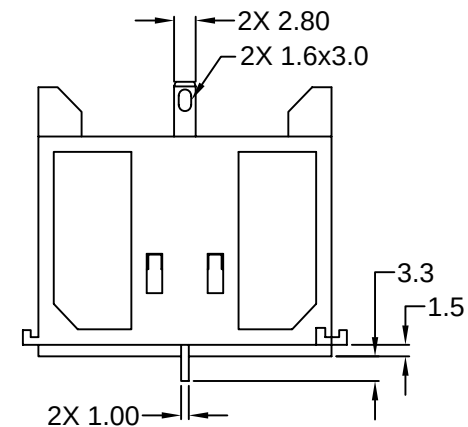

REVISIONS

REV	DATE	CHANGE	CHNG	CHK	APPR
A	03/15/02	REVISED / UPDATED	GQ	TD	PB

TOLERANCE
UNLESS OTHERWISE SPECIFIED
X ± 1
X.X ± 0.4
X.XX ± 0.20

DRAWN BY	PB	DATE:	11/20/01
CHECK BY	TD	DATE:	11/20/01
APPR BY		DATE:	

Power Dynamics, Inc.

Phone: 973 560-0019 Whippany, New Jersey Fax: 973 560-0076

PART: 1 CELL D (R20) BATTERY HOLDER
INTERLOCKING; PCB / BASEBOARD MOUNT

PART #:	B37	SHEET	1 of 1
SIZE:	A	ALL DIMENSIONS FOR REFERENCE ONLY DIMENSIONS ARE IN MILLIMETERS	REV: A
SCALE:	NTS		