


SHEET 1 OF 1

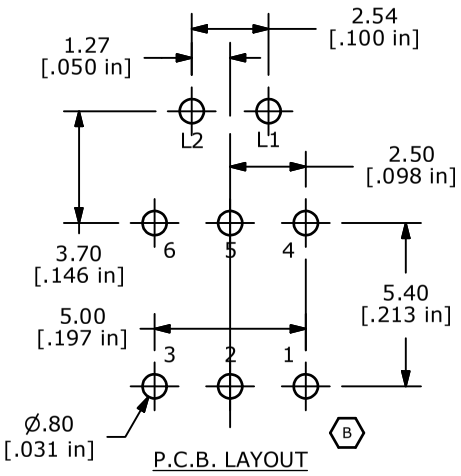



P.C.B. LAYOUT



CIRCUIT DIAGRAM

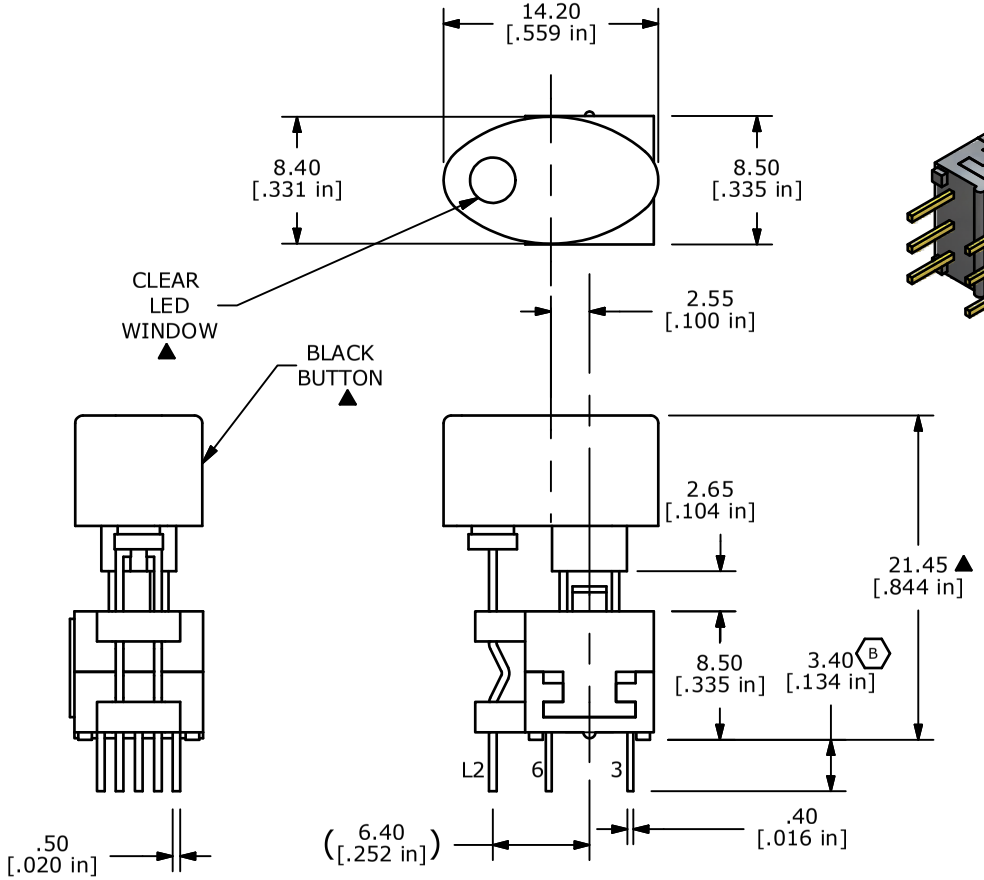

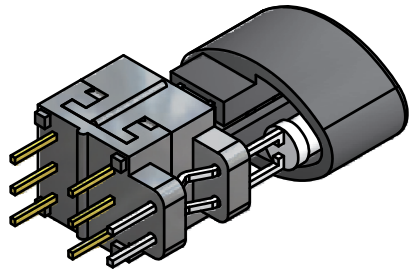

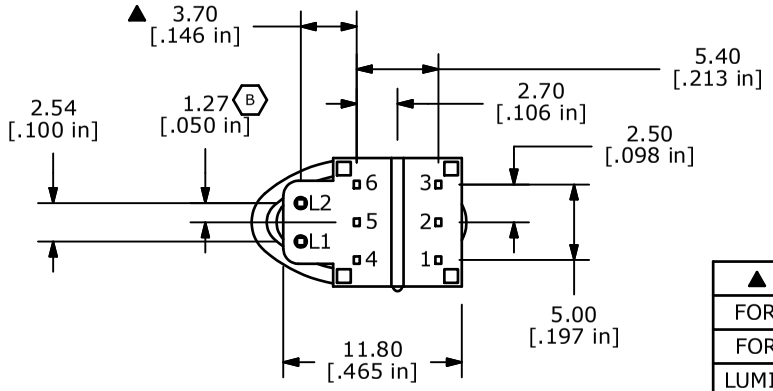

NOTES:

1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=± 0.4
   X.XX=± 0.25
3. TERMINAL NUMBERS FOR REF. ONLY
4. CONTACT RATING: 0.1A @ 30VDC
5. ▲TRAVEL: FULL = 2.5± 0.3; LOCK = 1.5± 0.3mm'S
6. OPERATING FORCE: 250± 100gf
7. ELECTRICAL LIFE: 10,000 CYCLES
8. ▲DENOTES CRITICAL PARAMETER
9. CONTACT MATERIAL: SILVER
10. CONTACT RESISTANCE: 50m OHM MAX.
11. OPERATING TEMPERATURE: -20c TO +70c
12. INSULATION RESISTANCE: 100M OHMS MIN.
13. ▲LED COLOR: BLUE
14. 2002/95/EC (RoHS) COMPLIANT AND HALOGEN FREE

B

▲ LED SPECS	UNITS	BLUE
FORWARD CURRENT	mA	20
FORWARD VOLTAGE	V	3.5-4.0
LUMINOUS INTENSITY	MCD	1,500

REV	PCR NO	DESCRIPTION	DATE	BY
B	19554	DIM CHANGES & UPDATE	12/30/10	BGL
A	18806	New-Release	1/20/10	rc

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH™

TITLE TL2205EEBPBB

SCALE	DATE	DR	DWG	REV
2:1	1/20/2010	rc	B401012	B