



BLOCK TYPE AUTOMOTIVE RECTIFIER

B302 THRU B304

VOLTAGE RANGE 200 to 400 Volts

CURRENT 50.0 Amperes


TECHNICAL SPECIFICATION:

FEATURES

- Low Leakage
- Low forward voltage drop
- High current capability
- High forward surge current capacity
- Glass passivated chip

MECHANICAL DATA

- Technology: vacuum soldered
- Copper cup with transfer molded plastic
- Polarity: B30-P lead-P
B30-N lead-N
- Lead: Plated Ni lead, solderable per MIL-STD-202E method 208C
- Mounting: Press Fit
- Weight: 0.094 ounces, 2.65 grams

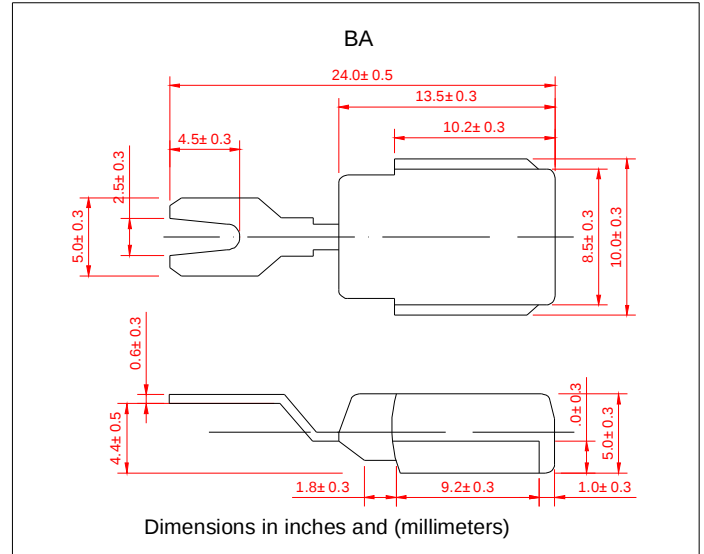

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60HZ, resistive or inductive load
- For capacitive load derate current by 20%

	SYMBOLS	B502-P B502-N	B503-P B503-N	B504-P B504-N	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	200	300	400	Volts
Maximum RMS Voltage	V _{RMS}	140	210	280	Volts
Maximum DC Blocking Voltage	V _{DC}	200	300	400	Volts
Maximum Average Forward Rectified Current, At Tc=105°C	I _O	50			Amps
Peak Forward Surge Current 3.3mS single half sine wave superimposed on Rated load (JEDEC method)	I _{FSM}	600			Amps
Rating for fusing (t<8.3ms)	I ² t	1494			A ² S
Maximum instantaneous Forward Voltage at 100A	V _F	1.08			Volts
Maximum DC Reverse Current at Rated TA=25°C DC Blocking Voltage TA=100°C	I _R	5.0			UA
		450			
Typical Thermal Resistance	R _{θJC}	1.0			°C/W
Operating and Storage Temperature Range	T _J ,T _{STG}	(-65 to +175)			°C

Notes:

1. Enough heatsink must be considered in application.



BLOCK TYPE AUTOMOTIVE RECTIFIER


B502 THRU B504

VOLTAGE RANGE 200 to 400 Volts


CURRENT 50.0 Amperes

RATINGS AND CHARACTERISTIC CURVES B502 THRU B504


F1G.1 TYPICAL FORWARD CURRENT DERATING CURVE

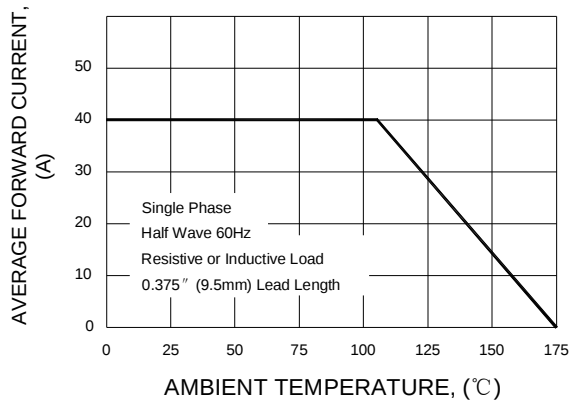

F1G.2 MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

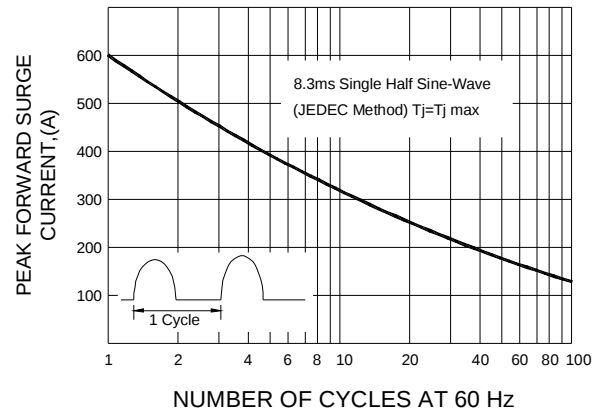

F1G.3 TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

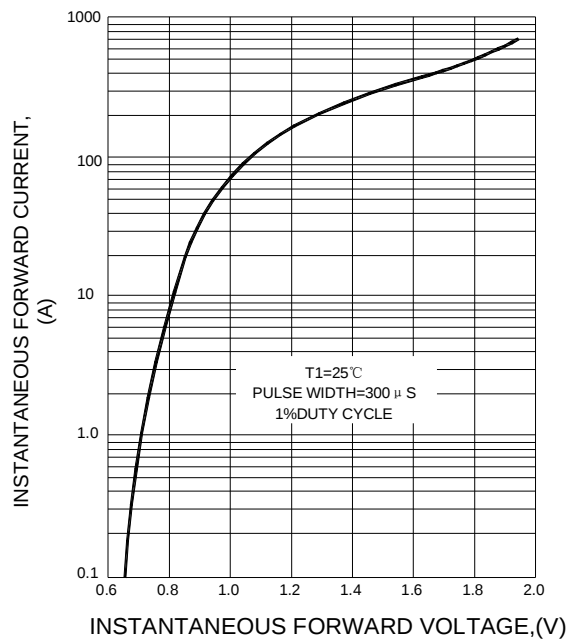

F1G.4 FORWARD POWER DISSIPATION

