

Glass Passivated Junction Fast Switching Rectifier

Reverse Voltage 400 to 1000 V
Forward Current 1.0 A

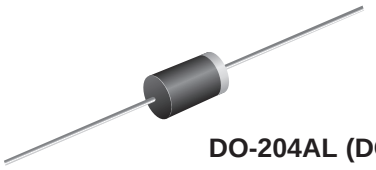

DO-204AL (DO-41)

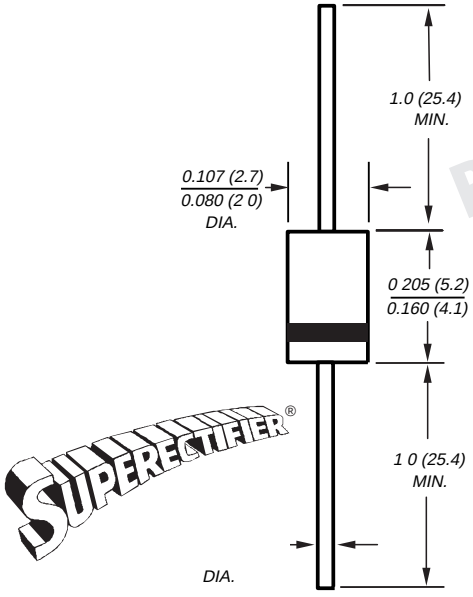

NOTE *Lead diameter is* 0 026 (0.66) / 0 023 (0.58) *for suffix "E" part numbers*

Dimensions in inches and (millimeters)
**Glass-plastic encapsulation technique is covered by Patent No. 3,996,602, and brazed-lead assembly by Patent No. 3,930,306*

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- High temperature metallurgically bonded construction
- For use in high frequency rectifier circuits
- Fast switching for high efficiency
- Cavity-free glass passivated junction
- Capable of meeting environmental standards of MIL-S-19500
- 1.0 Ampere operation at T_A=55°C with no thermal runaway
- Typical I_R less than 0.1µA
- High temperature soldering guaranteed: 350°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

Mechanical Data

Case: JEDEC DO-204AL, molded plastic over glass body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.012 ounce, 0.3 gram

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	BA157GP	BA158GP	BA159DGP	BA159GP	Units
Maximum repetitive peak reverse voltage	V_{RRM}	400	600	800	1000	V
Maximum RMS voltage	V_{RMS}	280	420	560	700	V
Maximum DC blocking voltage	V_{DC}	400	600	800	1000	V
Maximum average forward rectified current 0.375" (9.5mm) lead length at T_A=55°C	$I_{F(AV)}$	1.0				A
Peak forward surge current 10ms single half sine-wave superimposed on rated load at T_A=25°C	I_{FSM}	20				A
Typical thermal resistance (NOTE 1)	$R_{\Theta JA}$	55				°C/W
Operating junction and storage temperature range	T_J, T_{STG}	– 65 to +175				°C

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbols	BA157GP	BA158GP	BA159DGP	BA159GP	Units
Maximum instantaneous forward voltage at 1.0A	V_F	1.3				V
Maximum DC reverse current at rated DC blocking voltage T_A=25°C	I_R	5.0				µA
Maximum reverse recovery time at I_F=0.5A, I_R=1.0A, I_{rr}=0.25A	t_{rr}	150	250	500	500	ns
Typical junction capacitance at 4.0V, 1MHz	C_J	15				pF

Notes:
(1) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

Ratings and Characteristic Curves (T_A = 25°C unless otherwise noted)

Fig. 1 – Forward Current Derating Curve

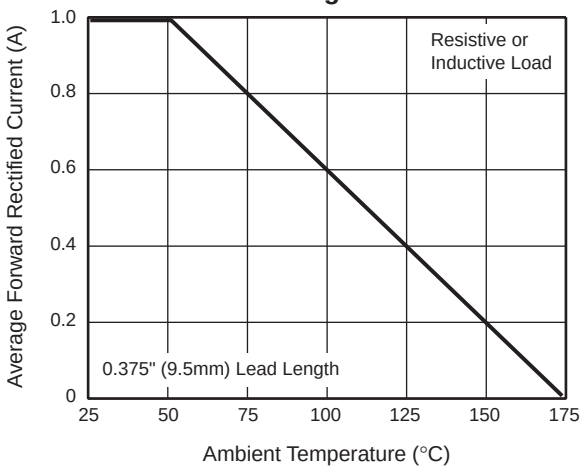


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

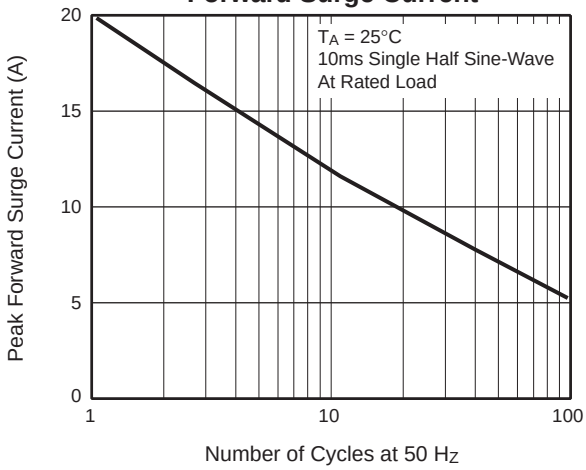


Fig. 3 – Typical Instantaneous Forward Characteristics

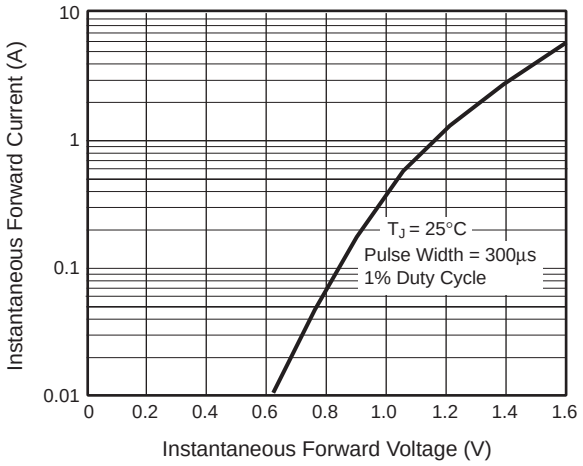


Fig. 4 – Typical Reverse Characteristics

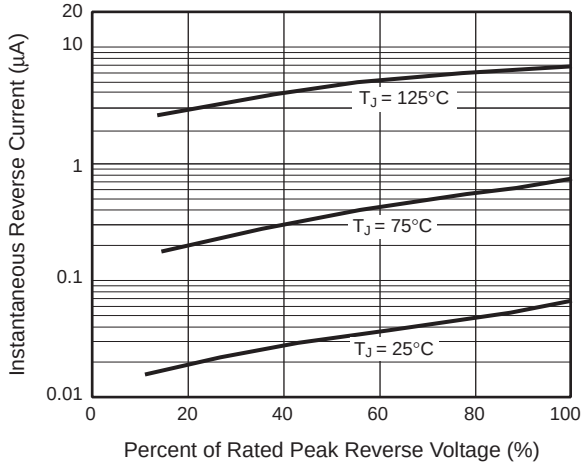


Fig. 5 – Typical Junction Capacitance

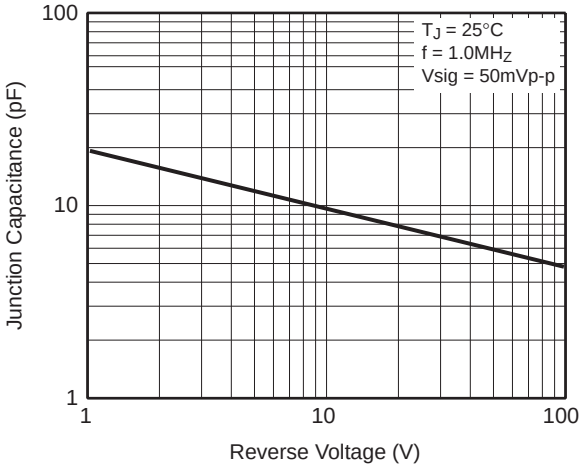


Fig. 6 – Typical Transient Thermal Impedance

