BLOCK TYPE AVALANCHE AUTOMOTIVE RECTIFIER


BA30Z

AVALANCHE VOLTAGE **24 to 32 Volts**
CURRENT **30 Amperes**

Technical Specifecation:

Features:

- High power capability
- Economical
- Avalanche Voltage: 24V to 32V
- Glass passivated chip

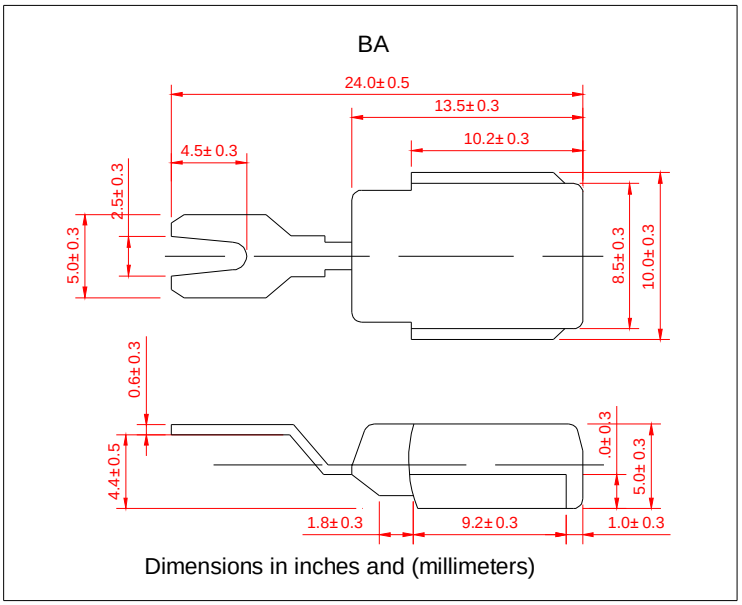

Dimensions in inches and (millimeters)

MECHANICAL DATA

- Copper cup with transfer molded plastic
- Epoxy: UL94-0 rate flame ratardant
- Polarity: BA30-P lead-P
  BA30-N lead-N
- Technology vacuum soldered
- Lead: Plated slug, solderable per MIL-STD-202E Method 208C
- Weight: 0.094 ounce 2.65 Grams


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25℃ ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		BA30Z-P/BA30Z-N			
Electrical Characteristics @ 25℃	SYMBOLS	MIN	NOMINAL	MAX	UNITS
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RRM} V_{DC}		20 20 20		Volts
Average Rectified Forward Current (Tc=125℃)	Io		30		Amps
Repetitive Peak Reverse Surge Current Tc=10msec Dury Cycle＜1%	I_{RSM}		30		Amps
Breakdown Voltage (Vbr@ir=100mA, Tc=25℃) Ir=90Amps, Tc=150℃, PW=80usec	Vbr1 Vbr2	24	25-27	32 40	Volts Volts
Forward Voltage Drop @If=100Amps＜300usec	V_F		1.05	1.10	Volts
Peak Forward Surge Current	I_{FSM}		400		Amps
Reverse Leakage (V_R=17Vdc) T_A=25℃	I_R		1.0	2.0	uAmps
Operating and Storage Junction Temperature Range	T_J ,T_{STG}		-65 to +175		℃

Notes: 1. Enough heatsink must be considered in application.

Fig.1



Surge current characteristics

E-mail: sales@cnmic.com **Web Site: www.cnmic.com**