BAS116

SURFACE MOUNT LOW LEAKAGE DIODE

Please click here to visit our online spice models database.

Features

- Surface Mount Package Ideally Suited for Automated Insertion
- Very Low Leakage Current
- **Lead Halogen and Antimony Free, RoHS Compliant "Green" Device (Notes 3 and 4)**


Mechanical Data

- Case: SOT-23
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020D
- Terminal Connections: Solderable per MIL-STD-202, Method 208
- Lead Free Plating (Matte Tin Finish annealed over Alloy 42 leadframe).
- Polarity: See Diagram
- Marking Information: See Page 2
- Ordering Information: See Page 2
- Weight: 0.008 grams (approximate)

SOT-23



TOP VIEW



TOP VIEW
Internal Schematic

Maximum Ratings @T_A = 25°C unless otherwise specified

Characteristic	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	V_{RRM} V_{RWM} V_R	85	V
RMS Reverse Voltage	$V_{R(RMS)}$	60	V
Forward Continuous Current (Note 1)	I_{FM}	215	mA
Repetitive Peak Forward Current	I_{FRM}	500	mA
Non-Repetitive Peak Forward Surge Current @ t = 1.0μs @ t = 1.0ms @ t = 1.0s	I_{FSM}	4.0 1.0 0.5	A

Thermal Characteristics

Characteristic	Symbol	Value	Unit
Power Dissipation (Note 1) @T_A = 25°C	P_D	250	mW
Thermal Resistance Junction to Ambient Air (Note 1) @T_A = 25°C	$R_{\theta JA}$	500	°C/W
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +150	°C

Electrical Characteristics @T_A = 25°C unless otherwise specified

Characteristic	Symbol	Min	Typ	Max	Unit	Test Condition
Reverse Breakdown Voltage (Note 2)	$V_{(BR)R}$	85	—	—	V	I_R = 100μA
Forward Voltage	V_F	—	—	0.90 1.0 1.1 1.25	V	I_F = 1.0mA I_F = 10mA I_F = 50mA I_F = 150mA
Leakage Current (Note 2)	I_R	—	—	5.0 80	nA nA	V_R = 75V V_R = 75V, T_j = 150°C
Total Capacitance	C_T	—	2	—	pF	V_R = 0, f = 1.0MHz
Reverse Recovery Time	t_{rr}	—	—	3.0	μs	I_F = I_R = 10mA, I_{rr} = 0.1 x I_R, R_L = 100Ω

Notes:
1. Part mounted on FR-4 PC board with pad layout as shown on page 3.
2. Short duration pulse test used to minimize self-heating effect.
3. No purposefully added lead. Halogen and Antimony Free.
4. Product manufactured with Data Code V9 (week 33, 2008) and newer are built with Green Molding Compound. Product manufactured prior to Date Code V9 are built with Non-Green Molding Compound and may contain Halogens or Sb_2O_3 Fire Retardants.

© Diodes Incorporated

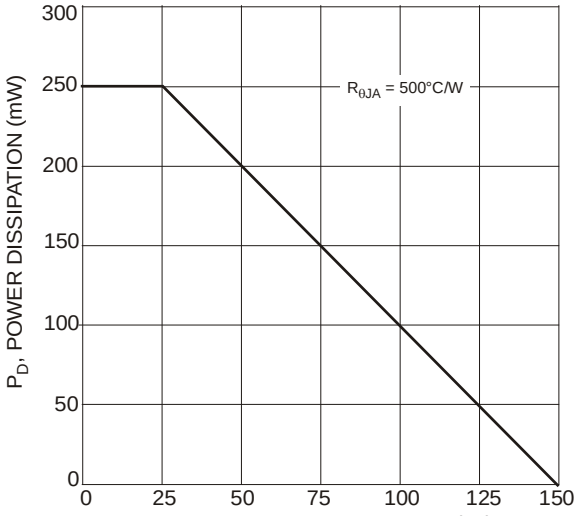


Fig. 1 Power Derating Curve

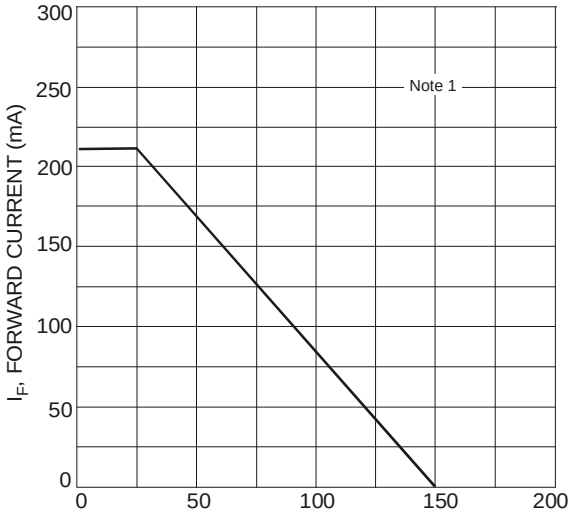


Fig. 2 Current Derating Curve

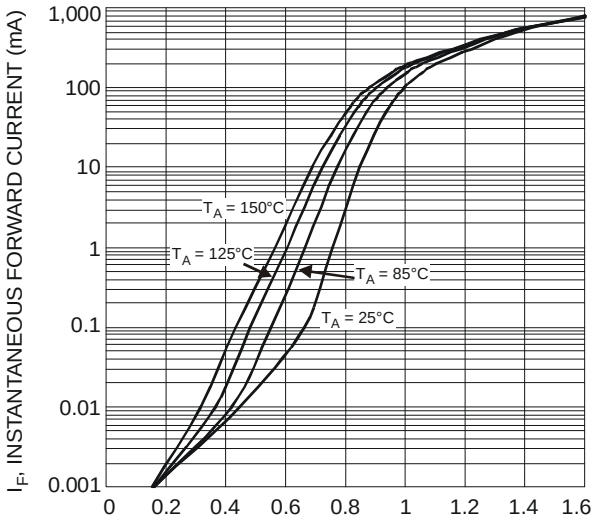


Fig. 3 Typical Forward Characteristics

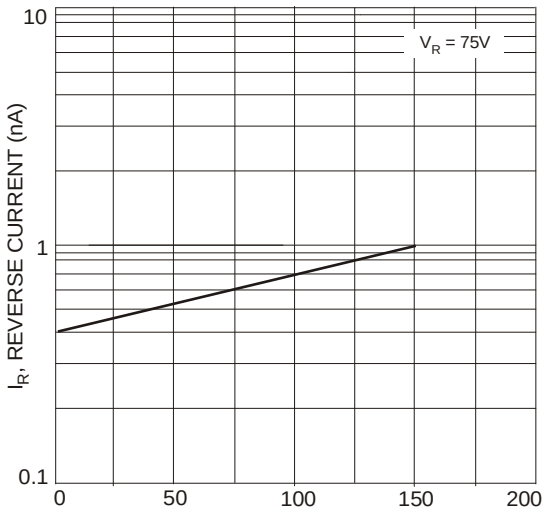



Fig. 4 Typical Reverse Characteristics

Ordering Information (Note 5)

Part Number	Case	Packaging
BAS116-7-F	SOT-23	3000/Tape & Reel

Notes: 5. For packaging details, go to our website at http://www.diodes.com/datasheets/ap02007.pdf.

Marking Information



XXX = Product Type Marking Code; K50, K54
YM = Date Code Marking
Y = Year ex: N = 2002
M = Month ex: 9 = September


Date Code Key

Year	2001	2002	2003	2004	2005	2006	2007	2008	2009	2010	2011	2012
Code	M	N	P	R	S	T	U	V	W	X	Y	Z

Month	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec
Code	1	2	3	4	5	6	7	8	9	O	N	D


© Diodes Incorporated

Package Outline Dimensions

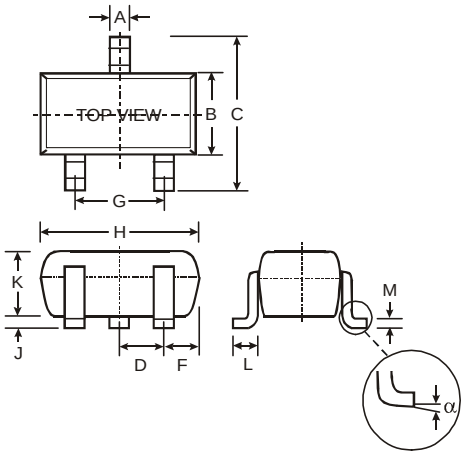

SOT-23		
Dim	**Min**	**Max**
A	0.37	0.51
B	1.20	1.40
C	2.30	2.50
D	0.89	1.03
F	0.45	0.60
G	1.78	2.05
H	2.80	3.00
J	0.013	0.10
K	0.903	1.10
L	0.45	0.61
M	0.085	0.180
α	0°	8°
All Dimensions in mm		

Suggested Pad Layout

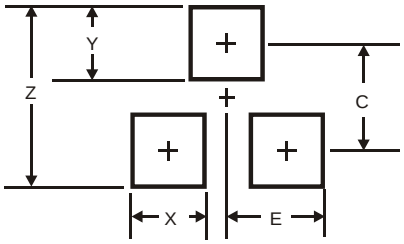

Dimensions	Value (in mm)
Z	2.9
X	0.8
Y	0.9
C	2.0
E	1.35

IMPORTANT NOTICE

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to any product herein. Diodes Incorporated does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

Diodes Incorporated products are not authorized for use as critical components in life support devices or systems without the expressed written approval of the President of Diodes Incorporated.

© Diodes Incorporated