
Small Signal Schottky Diode

Features

- For general purpose applications
- This diode features low turn-on voltage. The devices are protected by a PN junction guard ring against excessive voltage, such as electrostatic discharges.
- Metal-on-silicon Schottky barrier device which is protected by a PN junction guard ring.
- The low forward voltage drop and fast switching make it ideal for protection of MOS devices, steering, biasing and coupling diodes for fast switching and low logic level applications
- This diode is also available in a DO-35 case with type designation BAT86.
- AEC-Q101 qualified
- Compliant to RoHS Directive 2002/95/EC and in accordance to WEEE 2002/96/EC

RoHS COMPLIANT



94 9371

Applications

- Applications where a very low forward voltage is required

Mechanical Data

Case: MiniMELF SOD-80
Weight: approx. 31 mg
Cathode band color: black
Packaging codes/options:
GS18/10K per 13" reel (8 mm tape), 10K/box
GS08/2.5K per 7" reel (8 mm tape), 12.5K/box

Parts Table

Part	Ordering code	Type marking	Remarks
BAS86	BAS86-GS18 or BAS86-GS08	-	Tape and reel

Absolute Maximum Ratings

T_{amb} = 25 °C, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Continuous reverse voltage		V_R	50	V
Forward continuous current		I_F	200 [1]	mA
Repetitive peak forward current	t_p < 1 s, ν ≤ 0.5	I_{FRM}	500 [1]	mA
Power dissipation[1]		P_{tot}	200 [1]	mW

[1] Valid provided that electrodes are kept at ambient temperature

Thermal Characteristics

T_{amb} = 25 °C, unless otherwise specified

Parameter	Test condition	Symbol	Value	Unit
Thermal resistance junction to ambient air		R_{thJA}	300 [1]	K/W
Junction temperature		T_j	125	°C
Ambient operating temperature range		T_{amb}	- 65 to + 125	°C
Storage temperature range		T_{stg}	- 65 to +150	°C

[1] Valid provided that electrodes are kept at ambient temperature

Electrical Characteristics

T_{amb} = 25 °C, unless otherwise specified

Parameter	Test condition	Symbol	Min.	Typ.	Max.	Unit
Reverse breakdown voltage	I_R = 10 µA (pulsed)	$V_{(BR)}$	50			V
Leakage current	V_R = 40 V	I_R			5	µA
Forward voltage	Pulse test t_p < 300 µs, I_F = 0.1 mA, δ < 2 %	V_F		200	300	mV
	Pulse test t_p < 300 µs, I_F = 1 mA, δ < 2 %	V_F		275	380	mV
	Pulse test t_p < 300 µs, I_F = 10 mA, δ < 2 %	V_F		365	450	mV
	Pulse test t_p < 300 µs, I_F = 30 mA, δ < 2 %	V_F		460	600	mV
	Pulse test t_p < 300 µs, I_F = 100 mA, δ < 2 %	V_F		700	900	mV
Diode capacitance	V_R = 1 V, f = 1 MHz	C_D			8	pF
Reverse recovery time	I_F = 10 mA, I_R = 10 mA, I_{rr} = 1 mA,	t_{rr}			5	ns

Typical Characteristics

T_{amb} = 25 °C, unless otherwise specified

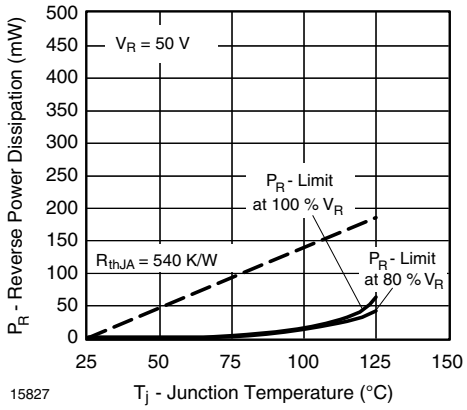


Figure 1. Max. Reverse Power Dissipation vs. Junction Temperature

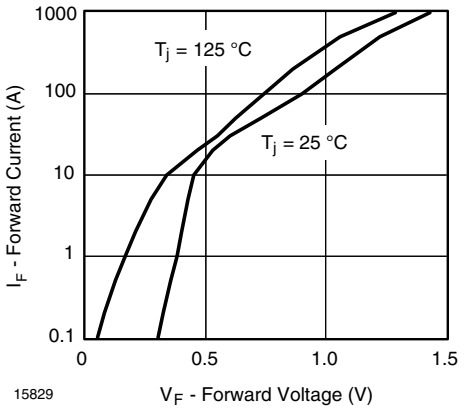


Figure 3. Forward Current vs. Forward Voltage

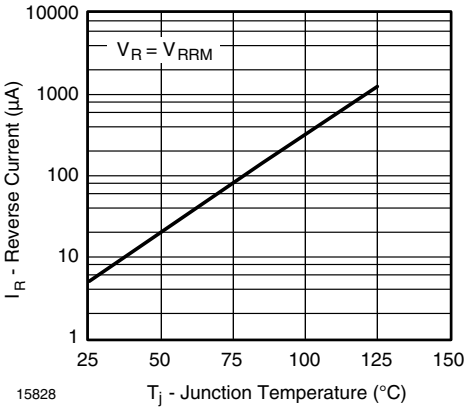


Figure 2. Reverse Current vs. Junction Temperature


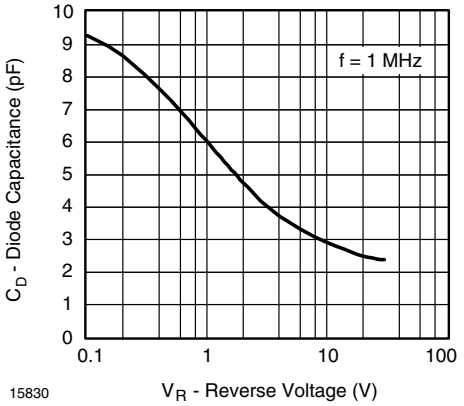


Figure 4. Diode Capacitance vs. Reverse Voltage


For technical questions within your region, please contact one of the following:
DiodesAmericas@vishay.com, DiodesAsia@vishay.com, DiodesEurope@vishay.com

Package Dimensions in millimeters (inches): **MiniMELF SOD-80**

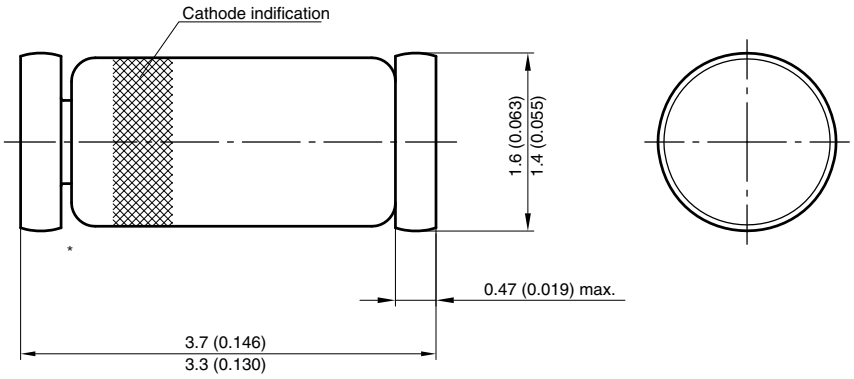


* The gap between plug and glass can be either on cathode or anode side

Foot print recommendation:

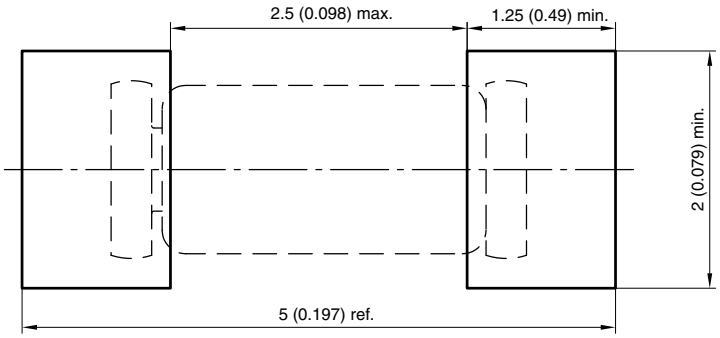


Document no.:6.560-5005.01-4
Rev. 8 - Date: 07.June.2006
96 12070

PACKAGE DIMENSIONS in millimeters (inches)

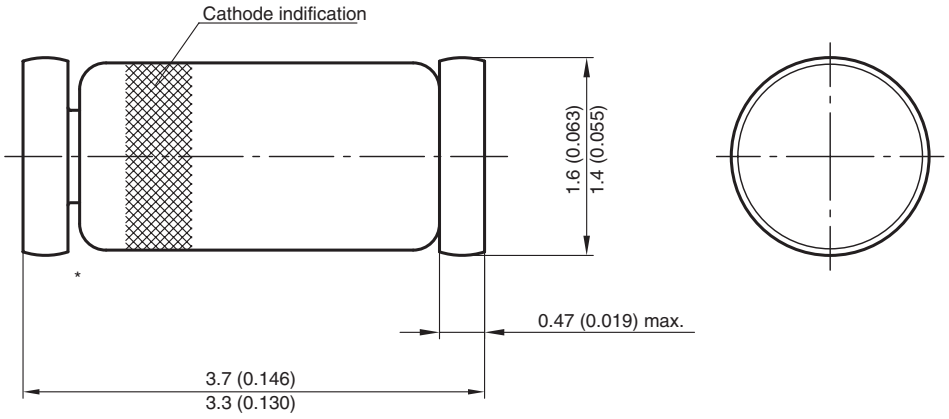

* The gap between plug and glass can be either on cathode or anode side

Foot print recommendation:

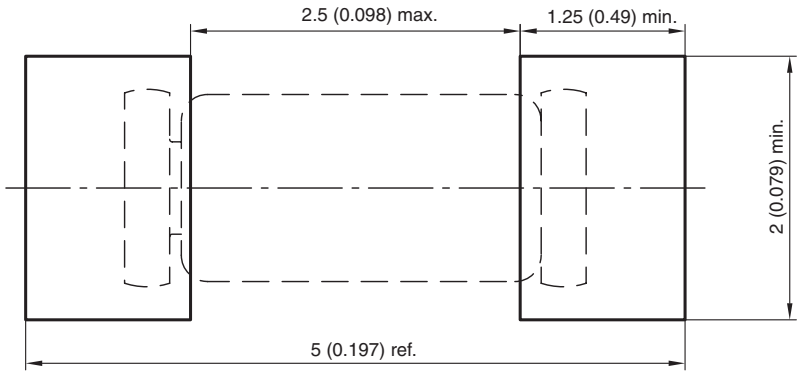

Document no.:6.560-5005.01-4
Rev. 8 - Date: 07.June.2006
96 12070

Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, “Vishay”), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay’s knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer’s responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and/or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer’s technical experts. Product specifications do not expand or otherwise modify Vishay’s terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk and agree to fully indemnify and hold Vishay and its distributors harmless from and against any and all claims, liabilities, expenses and damages arising or resulting in connection with such use or sale, including attorneys fees, even if such claim alleges that Vishay or its distributor was negligent regarding the design or manufacture of the part. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.