Micro Commercial Components

Micro Commercial Components
20736 Marilla Street Chatsworth
CA 91311
Phone: (818) 701-4933
Fax: (818) 701-4939

BAT85

SMALL SIGNAL SCHOTTKY DIODES


Features

- Lead Free Finish/Rohs Compliant (Note1) ("P"Suffix designates Compliant. See ordering information)
- For general purpose applications
- These diodes features very low turn-on voltage and fast switching. These devices are protected by a PN junction guard ring against excessive voltage,such as electrostatic discharges.
- This diode is also available in the Mini-MELF case with type designation LL85.
- Moisture Sensitivity Level 1

MECHANICAL DATA

- Case: Do-35 glass case
- Polarity: Color band denotes cathode end
- Weight: Approx. 0.13 gram

DO-35

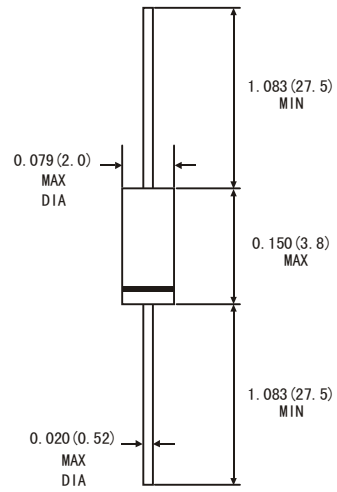

Dimensions in inches and (millimeters)

ABSOLUTE RATINGS(LIMITING VALUES)

	Symbols	Value	Units
Repetitive Peak Reverse Voltage	V_R	30	V
Forward Continuous Current at T =25^{0}C	I_F	200	mA
Repetitive Peak Forward Current at t<1s, ä< 0.5,T=25^{0}C	I_{FM}	300	mA
Surge forward current at t_p<10mS , T=25^{0}C	I_{FSM}	600	mA
Power Dissipation at T=65^{0}C	P_{tot}	200	mW
Junction temperature	T_J	125	^{0}C
Ambient Operating temperature Range	T_A	-55~+125	^{0}C
Storage Temperature Range	T_{STG}	-55~+150	^{0}C
1) Valid provided that leads at a distance of 4mm from case are kept at ambient temperature			

ELECTRICAL CHARACTERISTICS

	Symbols	Min.	Typ.	Max.	Units
Reverse breakdown voltage Tested with 100µA pulses	V(BR)R	30			V
Forward voltage Pulse Test t_P <300µs,δ <2% at I_F=0.1mA, at I_F=1mA, at I_F=10mA, at I_F=30mA, at I_F=100mA	 V_F V_F V_F V_F V_F		 0.50	 0.24 0.32 0.4 0.8	 V V V V V
Leakage current V_R=25V	I_R			2	µA
Junction Capacitance at V_R=1V ,f=1MHz	C_J			10	pF
Reverse recovery time Form I_F=10mA,I_R=10mA,I_R=1mA	trr			5	ns
Thermal resistance junction to ambient Air	$R_{\theta JA}$			300 [1]	K/W
1) Valid provided that leads at a distance of 4mm from case are kept at ambient temperature(DO-35)					

Note: 1. Lead in Glass Exemption Applied, see EU Directive Annex 5.

Micro Commercial Components

Ordering Information :

Device	Packing
Part Number-TP	Tape&Reel: 10Kpcs/Reel
Part Number-AP	Ammo Packing: 5Kpcs/Ammo Box
Part Number-BP	Bulk: 100Kpcs/Carton

*****IMPORTANT NOTICE*****

Micro Commercial Components Corp. reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes . ***Micro Commercial Components Corp .*** does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold ***Micro Commercial Components Corp .*** and all the companies whose products are represented on our website, harmless against all damages.

*****LIFE SUPPORT*****

MCC's products are not authorized for use as critical components in life support devices or systems without the express written approval of Micro Commercial Components Corporation.

*****CUSTOMER AWARENESS*****

Counterfeiting of semiconductor parts is a growing problem in the industry. Micro Commercial Components (MCC) is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. MCC strongly encourages customers to purchase MCC parts either directly from MCC or from Authorized MCC Distributors who are listed by country on our web page cited below. Products customers buy either from MCC directly or from Authorized MCC Distributors are genuine parts, have full traceability, meet MCC's quality standards for handling and storage. **MCC will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources.** MCC is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.