

BAV19WS, BAV20WS, BAV21WS


SURFACE MOUNT FAST SWITCHING DIODE

Features

- Fast Switching Speed
- Surface Mount Package Ideally Suited for automatic Insertion
- For General Purpose Switching Applications
- High Conductance

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

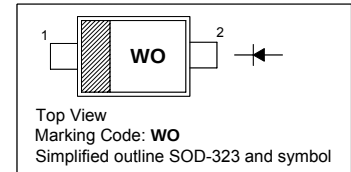


Absolute Maximum Ratings ($T_a = 25^\circ\text{C}$)

Parameter		Symbol	Value	Unit
Repetitive Peak Reverse Voltage	BAV19WS	V_{RRM}	120	V
	BAV20WS		200	
	BAV21WS		250	
Reverse Voltage	BAV19WS	V_R	100	V
	BAV20WS		150	
	BAV21WS		200	
Average Rectified Output Current		I_O	200	mA
Forward Continuous Current		I_{FM}	400	mA
Repetitive Peak Forward Current		I_{FRM}	625	mA
Non-repetitive Peak Forward Surge Current	at $t = 1 \mu\text{s}$	I_{FSM}	2.5	A
	at $t = 1 \text{ s}$		0.5	
Power Dissipation		P_{tot}	200	mW
Operating and Storage Temperature Range		T_j, T_{stg}	- 65 to + 150	$^\circ\text{C}$


Characteristics at $T_a = 25^\circ\text{C}$

Parameter		Symbol	Min.	Max.	Unit
Reverse Breakdown Voltage at $I_R = 100 \mu\text{A}$	BAV19WS	$V_{(BR)R}$	120	-	V
	BAV20WS		200	-	
	BAV21WS		250	-	
Reverse Current at $V_R = 100 \text{ V}$ at $V_R = 150 \text{ V}$ at $V_R = 200 \text{ V}$	BAV19WS	I_R	-	100	nA
	BAV20WS		-	100	
	BAV21WS		-	100	
Forward Voltage at $I_F = 100 \text{ mA}$ at $I_F = 200 \text{ mA}$		V_F	-	1	V
			-	1.25	
Total Capacitance at $f = 1 \text{ MHz}$		C_T	-	5	pF
Reverse Recovery Time at $I_F = I_R = 30 \text{ mA}$, $I_{RR} = 0.1 \times I_R$, $R_L = 100 \Omega$		t_{rr}	-	50	ns



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 07/04/2009

BAV19WS, BAV20WS, BAV21WS

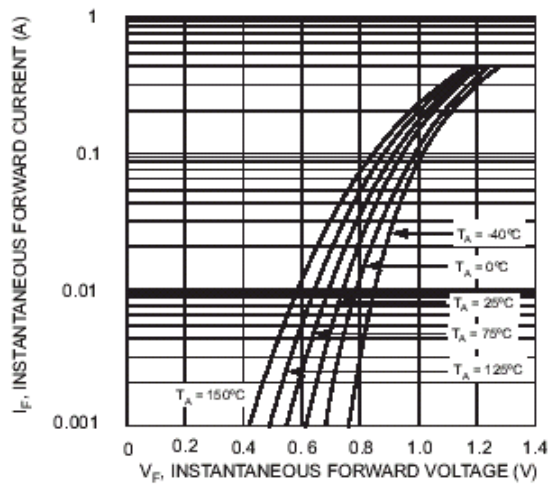


Fig. 1 Typical Forward Characteristics

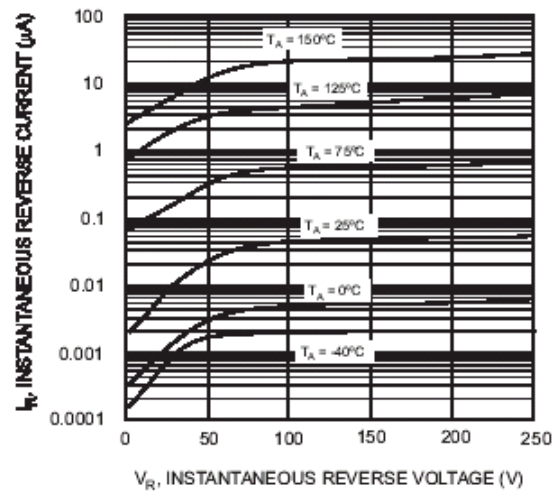


Fig. 2 Typical Reverse Characteristics

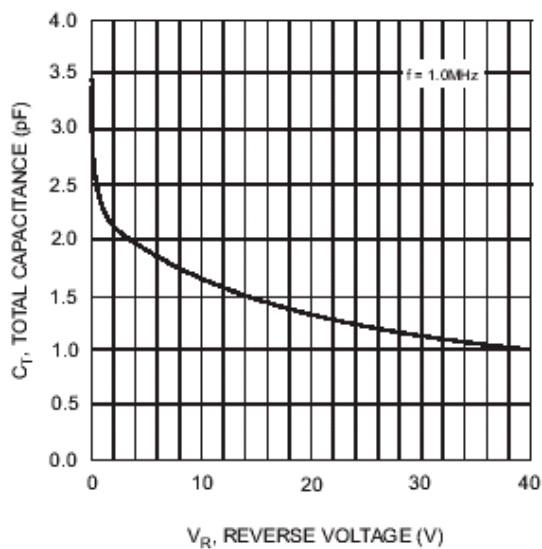


Fig. 3 Typical Capacitance vs. Reverse Voltage



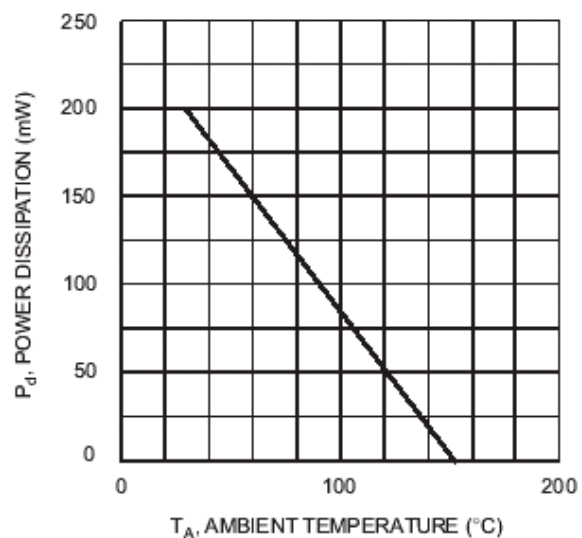


Fig. 4 Power Derating Curve, Total Package



SEMTECH ELECTRONICS LTD.

(Subsidiary of Sino-Tech International Holdings Limited, a company listed on the Hong Kong Stock Exchange, Stock Code: 724)




Dated : 07/04/2009

BAV19WS, BAV20WS, BAV21WS


PACKAGE OUTLINE

Plastic surface mounted package; 2 leads

SOD-323

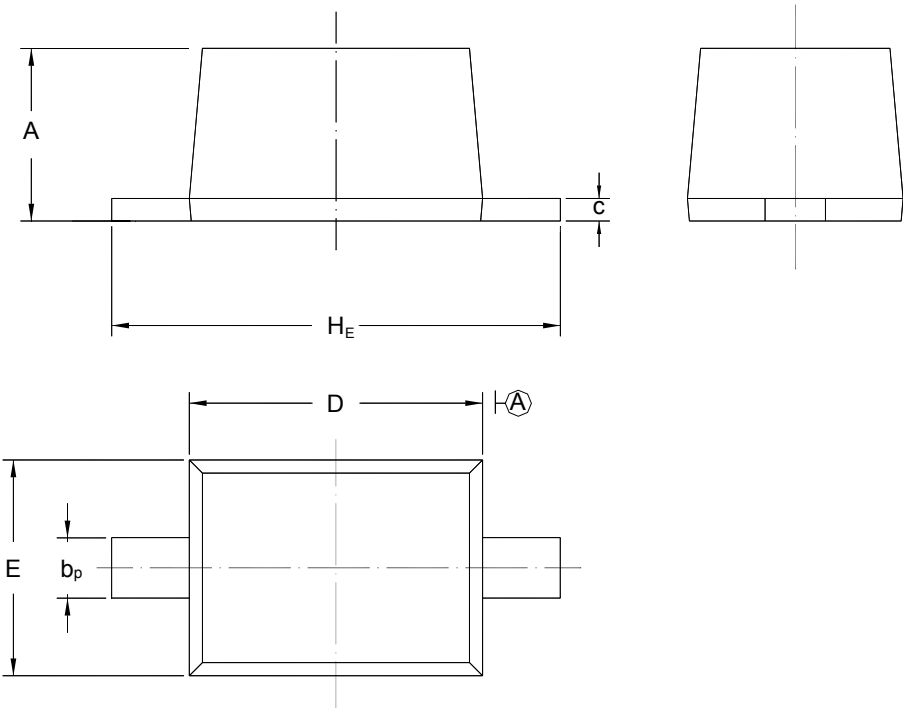

UNIT	A	b _p	C	D	E	H _E
mm	1.10 0.80	0.40 0.25	0.15 0.00	1.80 1.60	1.35 1.15	2.80 2.30



SEMTECH ELECTRONICS LTD.
(Subsidiary of Sino-Tech International Holdings Limited, a company
listed on the Hong Kong Stock Exchange, Stock Code: 724)



Dated : 07/04/2009