
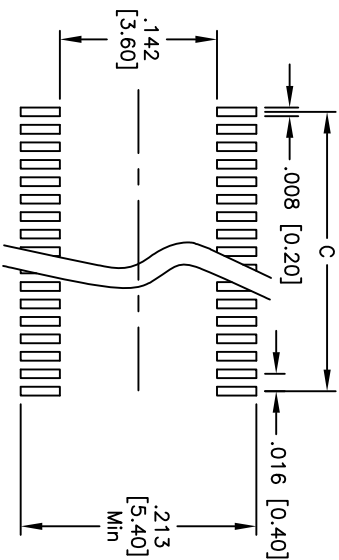






Rev	AWO #	Description	Date	Appr
-		RELEASED	11/30/10	

APPROVED: _____

DATE: _____ TITLE: _____

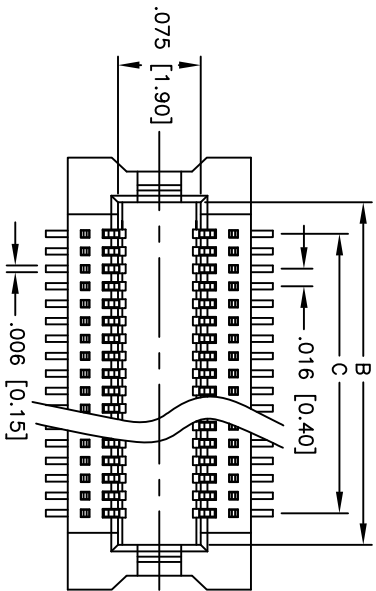

RECOMMENDED PCB LAYOUT

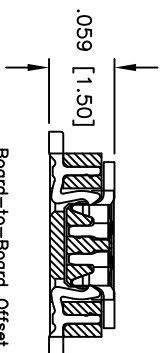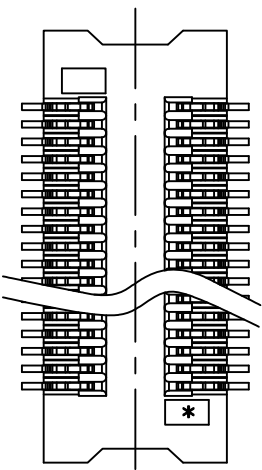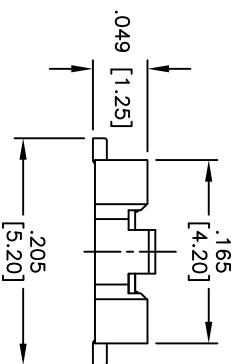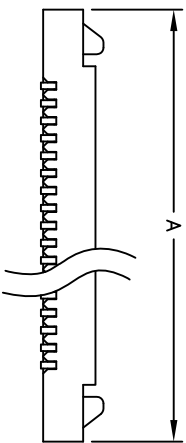

Board-to-Board Offset
Application Example

SPECIFICATIONS:

Material:

Insulator: Hi-Temp thermoplastic, rated UL 94V-0

Insulator color: Natural

Contacts: Phosphor Bronze

Plating:

Gold over Nickel underplate overall

Electrical:

Current rating: 0.5 Amps.

Contact resistance: 60 mohms max.@ AC 1mA

Insulation resistance: 50 Mohms min@ DC 100V

Dielectric withstanding voltage: 100 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +85°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds



PACKAGED ON TAPE & REEL

Positions: 10 Thru 100

A = .016 [0.40] x No. of Positions/2 + .122 [3.10]

B = .016 [0.40] x No. of Positions/2 + .037 [0.95]

C = .016 [0.40] x No. of Positions/2 - .016 [0.40]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083

Phone: 908-687-5000 Fax: 908-687-5710

TITLE
SURFACE MOUNT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM TOLERANCES: EXCEPT AS NOTED				INCHES			
HOLDERS				HOLES			
.X ± .10				ØX ± .10			
.XX ± .020				ØXX ± .015			
.XXX ± .015				ØXXX ± .010			
APPROVALS				DATE			
DRAWN				11/30/10			
CHECKED							
APPROVED							
SIZE				PART NO.			
X				BB4-SO-XXX-G-1.25-NP-T/R			
REV.				REV.			
REF: S00068T				SCALE: NTS			
SHEET 1 OF 1							