

BBS-3015-F

Heat Pipe, Fanless PC with P-M/C-M, 4 COM, 5 USB, 12V DC Adapter

Bare Bone



Features

- » Heat pipe, fanless PC design
- » Supports Intel® Pentium® M/Celeron® M processor TDP ≤ 24.5W
- » VGA, dual Ethernet port
- » USB Wireless LAN module
- » 1 x 2.5" HDD space, 1 x slim CD-ROM space
- » 1 x CF, 1 x mini PCI socket
- » 4 x COM port, 5 x USB2.0 port
- » 12V DC adapter

System

SBC

HS-2610

CPU

Intel® Pentium® M processor 1.6/1.8GHz or Intel® Celeron® M processor 1.5GHz (option)

System Chipset

Intel® 852GME/ICH4

System Memory

1 x 200-pin SO-DIMM, DDR 333MHz, Max. 1GB

Display Interface:

1 x D-SUB 15-pin

Ethernet Interface

2 x RJ-45 for Ethernet

1 x USB wireless LAN module

Storage

1 x 2.5" HDD space

1 x slim CD-ROM space

1 x Type II CF socket

Expansion Interface

1 x Type III mini PCI socket

Watchdog Timer

Software programmable time-out intervals from 1~255 sec. or 1~255min.

H/W Status Monitor

Monitoring temperatures, voltages status

Thermal System

Heat pipe

Power

12V 60W DC adapter

+10~30V DC IN (option)

Operating/Storage Temperature

0~45°C/-20~+70°C


Certification

FCC/CE Class A compliance


Dimensions

23.2(L) x 9.3(H) x 16.2(W) cm

I/O Interface

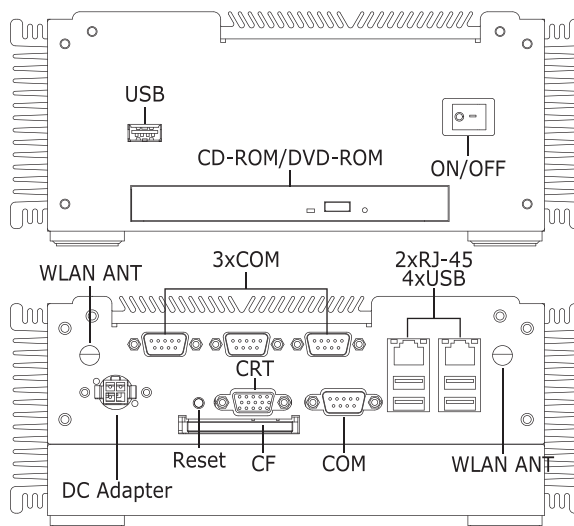

Dimensions (unit:cm)

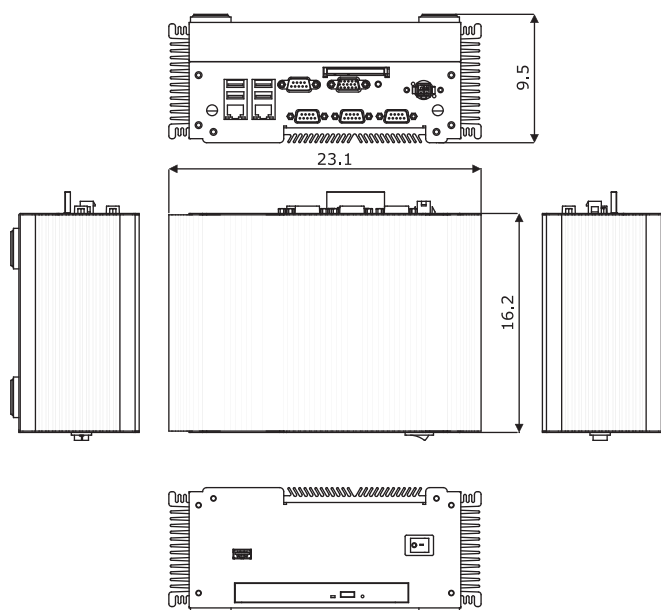

Ordering Information

BBS-3015-F/5 USB

Heat Pipe, Fanless PC w/Wireless LAN Module, 4 COM, 5 USB, 12V DC Adapter

BBS-3015-F/6 USB (by order)

Heat Pipe, Fanless PC w/4 COM, 6 USB, 12V DC Adapter

Accessory Options

CPU, Memory Module, CF Module, 2.5" HDD, Slim CD-ROM