


NPN Transistors

BC817 HF (KC817 HF)

■ Features

- For general AF applications
- Low collector-emitter saturation voltage
- Complementary types: BC807 HF (PNP)

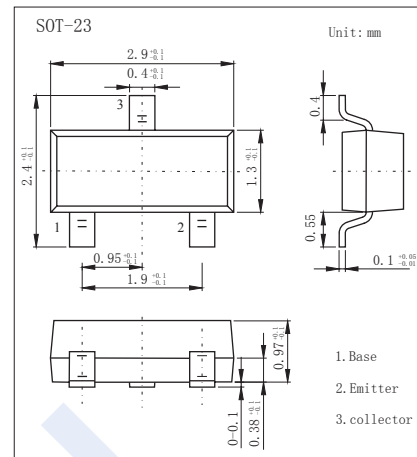

■ Absolute Maximum Ratings $T_a = 25^\circ\text{C}$

Parameter	Symbol	Rating	Unit
Collector - Base Voltage	V_{CB0}	50	V
Collector - Emitter Voltage	V_{CE0}	45	
Emitter - Base Voltage	V_{EB0}	5	
Collector Current - Continuous	I_C	0.5	A
Collector Power Dissipation	P_C	0.3	W
Junction Temperature	T_J	150	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 to 150	

■ Electrical Characteristics $T_a = 25^\circ\text{C}$

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector- base breakdown voltage	V_{CB0}	$I_C = 100\ \mu\text{A}, I_E = 0$	50			V
Collector- emitter breakdown voltage	V_{CE0}	$I_C = 10\ \text{mA}, I_B = 0$	45			
Emitter - base breakdown voltage	V_{EB0}	$I_E = 100\ \mu\text{A}, I_C = 0$	5			
Collector-base cut-off current	I_{CB0}	$V_{CB} = 45\ \text{V}, I_E = 0$			0.1	μA
Emitter cut-off current	I_{EB0}	$V_{EB} = 4\ \text{V}, I_C = 0$			0.1	
Collector-emitter saturation voltage	$V_{CE(sat)}$	$I_C = 500\ \text{mA}, I_B = 50\ \text{mA}$			0.7	V
Base - emitter saturation voltage	$V_{BE(sat)}$	$I_C = 500\ \text{mA}, I_B = 50\ \text{mA}$			1.2	
Base - emitter voltage	V_{BE}	$V_{CE} = 1\ \text{V}, I_C = 500\ \text{mA}$			1.2	
DC current gain	$h_{FE(1)}$	$V_{CE} = 1\ \text{V}, I_C = 100\ \text{mA}$	100		630	
	$h_{FE(2)}$	$V_{CE} = 1\ \text{V}, I_C = 500\ \text{mA}$	40			
Collector output capacitance	C_{ob}	$V_{CB} = 10\ \text{V}, f = 1\ \text{MHz}$		10		pF
Transition frequency	f_T	$V_{CE} = 5\ \text{V}, I_C = 10\ \text{mA}, f = 100\ \text{MHz}$	100			MHz

■ Classification of $h_{FE(1)}$

Rank	BC817-16 HF	BC817-25 HF	BC817-40 HF
Range	100-250	160-400	250-630
Marking	6A F	6B F	6C F

BC817 HF (KC817 HF)

■ Typical Characteristics

