
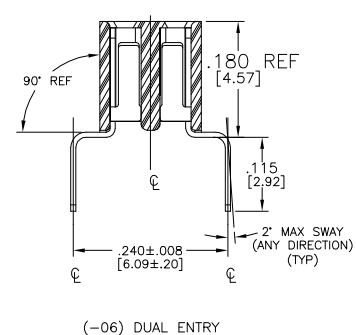

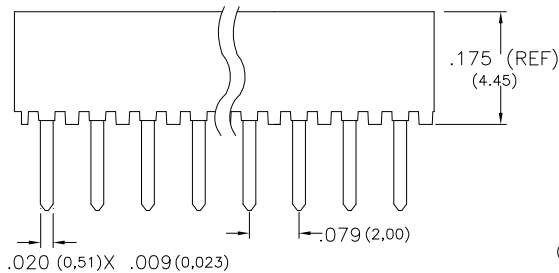
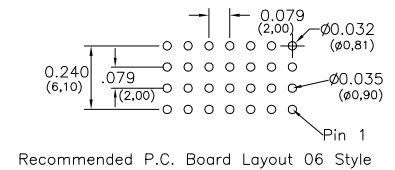
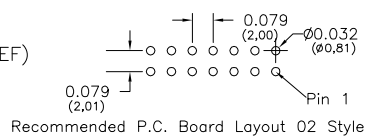


Major League Electronics .079 cl Box Contact Socket Strip

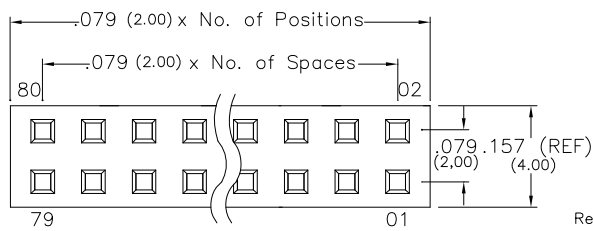

Tails may be clipped to achieve desired pin length

Ordering Information

BCSS-2 XX - D - XX - XX - XXX - LF

Pins P
01 - 40

Row Specification
D = Dual Row

- Lead Free

– Polarized Position
Leave blank if not needed

If required, specify empty pin position, e.g. 012 for Pin 12

Pin Options	
Top Entry	02
Dual Entry	06

	Plating Options
G	10µ Gold on Contact Area / Flash on Tail
T	Matte Tin All Over
GT	10µ Gold on Contact Area / Matte Tin on Tail
H	30µ Gold on Contact Area / Matte Tin on Tail
F	Gold Flash over Entire Pin

Specifications

Insertion Force - Single Contact only - H Plating:

3.7oz. (1,03N) avg with .0197 (0,50mm) sq. pin

Withdrawal Force - Single Contact only - H Plating:

2.2oz. (0,61N) avg with .0197 (0,50mm) sq. pin

Current Rating: 2.0 Ampere

Insulation Resistance: 1000MΩ Min.

Dielectric Withstanding: 500V AC

Contact Resistance: 10 mΩ Max.

Operating Temperature: -40°C to + 105°C

Max. Process Temperature:

Peak: 260°C up to 10 secs.

Process: 230°C up to 60 secs.

Wave: 260°C up to 6 secs.

Manual Solder: 350°C up to 5 secs.

Materials


Contact Material: Phosphor Bronze

Insulator Material: Nylon 6T

Plating: Au or Sn over 50μ" (1,27) Ni

Mates with:

BSTC,
BSTCM,
BSTCR,
BSTCRSM,
BSTS,
TBSTC,
TBSTCM,
TBSTS,
TBSTCM,
TBSTS,
TSHC,
TSHCR,
TSHCRE,
TSHCRSM,
TSHR,
TSHRE,
TSHS,
TSHSCM,
TSHSC,
TSHSCR,
TSHSCRE,
TSHSR,
TSHSRE,
TSHS,
TSHSM



BCSS-2-DV SERIES

.079 cl Dual Row
Box Contact Socket Strip

15 FEB 07

Scale
NTS

UNLESS OTHERWISE SPECIFIED
DIMENSIONS IN INCHES (MM)
TOLERANCES ARE:

ONE PLACE DECIMALS $\pm .100$
TWO PLACE DECIMALS $\pm .010$
THREE PLACE DECIMALS $\pm .005$
FOUR PLACE DECIMALS $\pm .0020$
ANGLES



4235 Earnings Way, New Albany, Indiana, 47150, USA
1-800-782-3486 (USA/Canada/Mexico)
Tel: 812-944-7244
Fax: 812-944-7268
E-mail: mle@mlelectronics.com
Web: www.mlelectronics.com

Edition
1

Sheet
1/1