

6

5

4

3





2

1

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/19/05	

APPROVED: _____

DATE: _____ TITLE: _____

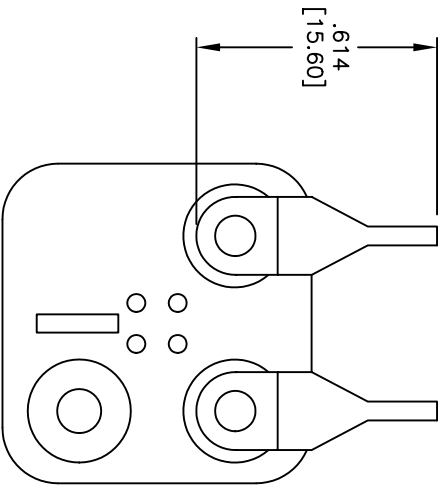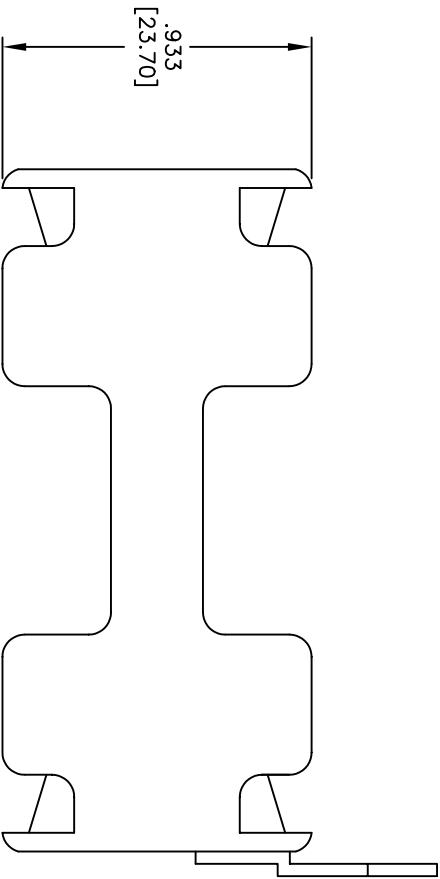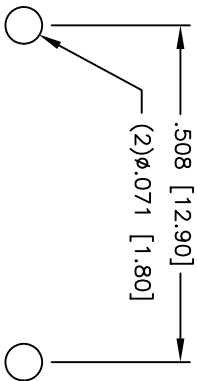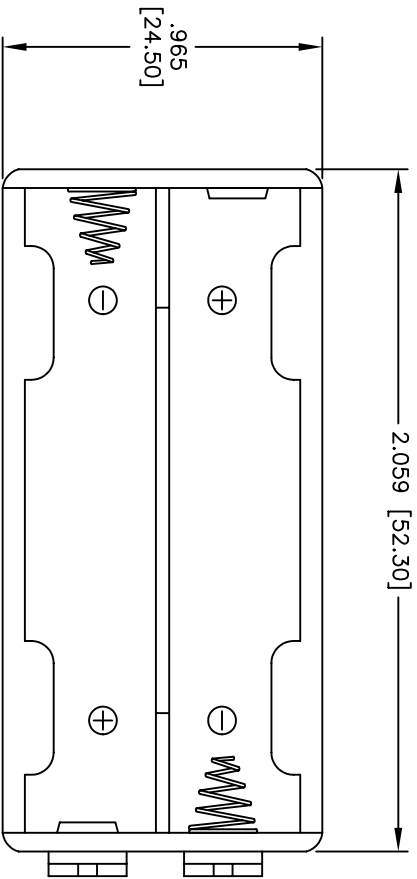

SPECIFICATIONS:

Material: Insulator: Impact resistant Polypropylene, rated UL94-HB
Insulator color: Black
Spring: Steel, Nickel plated
Contacts: Steel, Nickel plated
Electrical:
Operating voltage: 1.5 VDC max.
Temperature Rating:
Operating temperature: -10°C to +80°C
Environmental:
Lead free, RoHS compliant
Recommended soldering temp: 230°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED			
INCHES	HOLES		
.X ± .10	Ø.X	± .10	
.XX ± .020	Ø.XX	± .015	
.XXX ± .015	Ø.XXX	± .010	
APPROVALS		DATE	
DRAWN	SS	1/19/05	
CHECKED			
APPROVED			

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: BATTERY HOLDER, PCB TERMINALS
FOR FOUR "AAA" CELLS

SIZE	PART NO.	REV.
X	BH-11-1	-
REF:	SCALE: NTS	SHEET 1 OF 1