

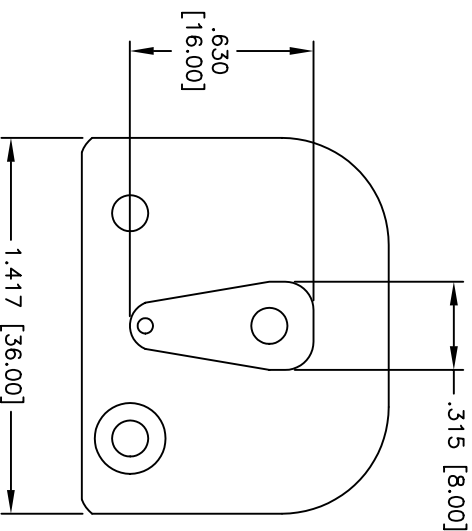


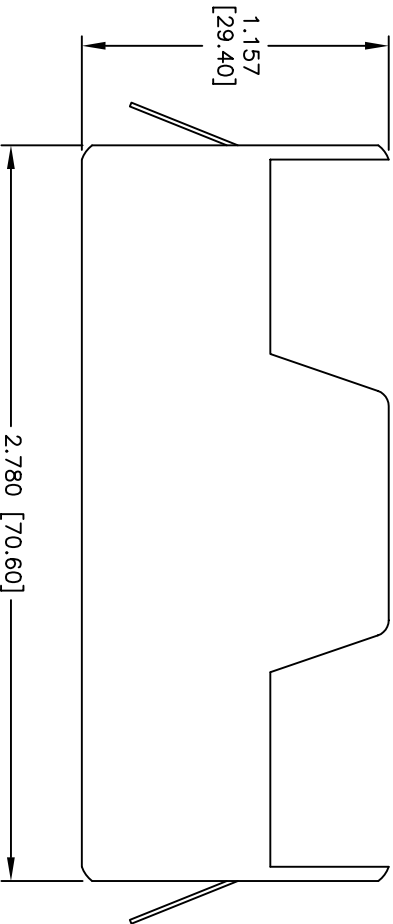

SPECIFICATIONS:

Material: Insulator: Impact resistant Polypropylene, rated UL94-HB  
Insulator color: Black  
Spring: Steel, Nickel plated  
Contacts: Steel, Nickel plated  
Electrical: Operating voltage: 1.5 VDC max.  
Temperature Rating: Operating temperature: -10°C to +80°C  
Environmental: Lead free, RoHS compliant

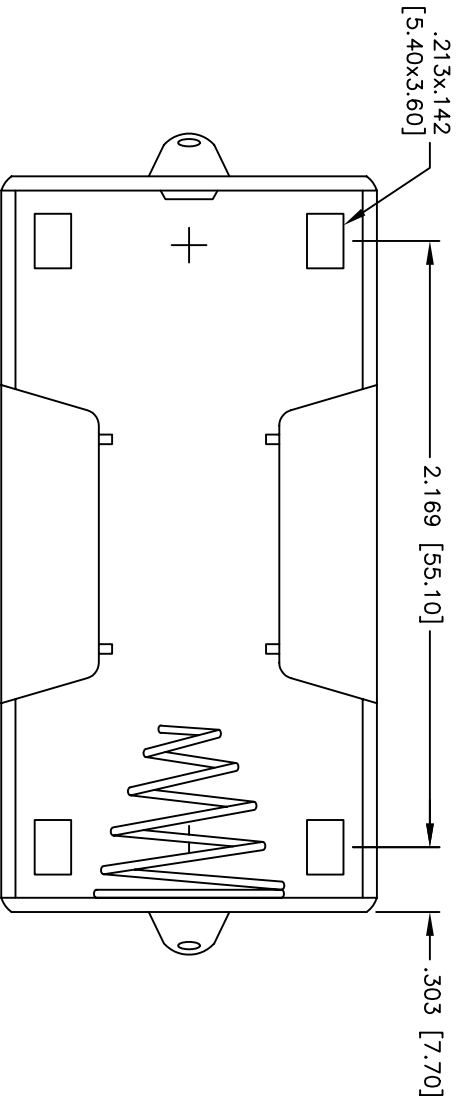

UNLESS OTHERWISE SPECIFIED  
ALL DIMENSIONS ARE INCHES [MM]  
TOLERANCES: EXCEPT AS NOTED  
INCHES HOLES

|      |        |      |        |
|------|--------|------|--------|
| .X   | ± .10  | ØX   | ± .10  |
| .XX  | ± .020 | ØXX  | ± .015 |
| .XXX | ± .015 | ØXXX | ± .010 |

APPROVALS

|          |    |         |
|----------|----|---------|
| DRAWN    | SS | 1/21/05 |
| CHECKED  |    |         |
| APPROVED |    |         |

**ADAM TECH**  
909 Rahway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

**BATTERY HOLDER, SOLDER TERMINALS  
FOR ONE "D" CELL**

|       |      |          |      |
|-------|------|----------|------|
| TITLE | SIZE | PART NO. | REV. |
|       | X    | BH-18-3  | -    |

REF: SCALE: NTS SHEET 1 OF 1