
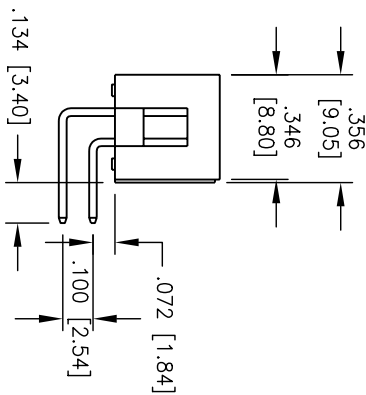
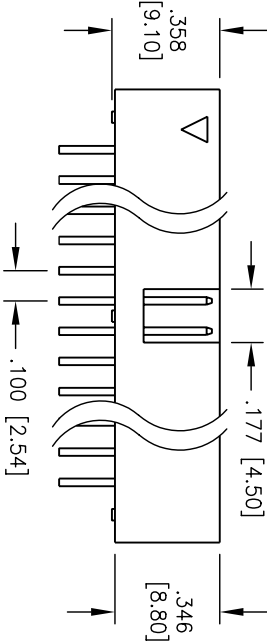
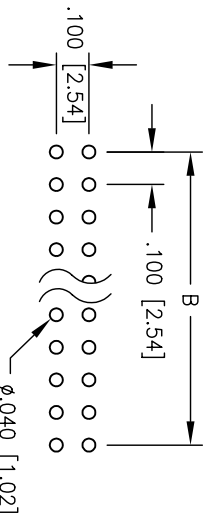


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/28/04	

APPROVED: _____
DATE: _____ TITLE: _____

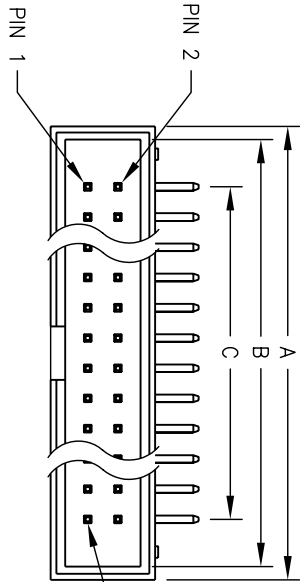

A = .100 [2.54] X No. of Positions /2 + .300 [7.60]
B = .100 [2.54] X No. of Positions /2 + .200 [5.08]
C = .100 [2.54] X No. of Spoces

SPECIFICATION:

Material:
Insulator: PBT, rated UL-94V-0
Contacts: Brass
Contact Plating:
Gold Flash over Nickel underplate overall
Electrical:
Operating Voltage: 250V AC max.
Current rating: 1 Amps max.
Contact resistance: 20 mohms max
Insulation resistance: 5000 Mohms min
Dielectric withstanding voltage: 1000 VAC / minute
Mechanical:
Mating durability: 500 cycles min.
Temperature Rating:
Operating temperature: -55° TO +105°

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

BOX HEADER, RIGHT ANGLE PCB MOUNT,
2 ROW .100 PITCH, GOLD FLASH PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES				TITLE			
X	± .10	Ø X	± .10	BOX HEADER, RIGHT ANGLE PCB MOUNT, 2 ROW .100 PITCH, GOLD FLASH PLATED			
.XX	± .020	Ø XX	± .015				
.XXX	± .015	Ø XXX	± .010				
APPROVALS		DATE		REV.			
DRAWN	SS	7/28/04		-			
CHECKED							
APPROVED							

SIZE	PART NO.	REV.
X	BHR-XX-HUA	-

REF:	SCALE:	SHEET	1 OF 1
	NTS		