

Round Type LED lamp

BL-L512

Features:

- Ø 5mm Round Type LED lamp
- Ø Ultra brightness.
- Ø Choice of various viewing angles.
- Ø Diffused, Transparent and Water clear lens are available.
- Ø IC compatible /Low current capability.
- Ø RoHs Compliance



Electrical-optical characteristics: (Ta=25°C) (Test Condition: IF=20mA)

Part Number	Chip			Lens Type	Forward Voltage(VF) Unit:V		Luminous Intensity (Iv) Unit:mcd		Viewing Angle 2θ/2 (deg)
	Emitted Color	Material	λp (nm)		Typ	Max	Min.	Typ.	
BL-L512SRC	Hi Red	AlGaAs,SH	660	Water Clear	1.85	2.20	50	250	20
BL-L512LRC	Super Red	AlGaAs,DH	660		1.85	2.20	250	600	
BL-L512URC	Ultra Red	AlGaAs,DDH	660		1.95	2.20	600	1000	
BL-L512UEC	Ultra Orange	AlGaInP	630		2.10	2.50	800	2000	
BL-L512UYC	Ultra Yellow	AlGaInP	590		2.10	2.50	1000	2200	
BL-L512UGC	Ultra Green	AlGaInP	574		2.20	2.50	300	700	
BL-L512PGC	Ultra Pure Green	InGaN	525		3.80	4.50	2000	5000	
BL-L512BGC	Ultra Bluish Green	InGaN	505		3.80	4.50	1800	4000	
BL-L512BC	Blue	InGaN	430		3.80	4.50	800	2000	
BL-L512UBC	Ultra Blue	InGaN	470		2.70	4.20	2000	5000	
BL-L512VC	UV	InGaN	405		3.80	4.50	80	150	
BL-L512UWC	Ultra White	InGaN	/		2.70	4.20	3000	10000	
BL-L512SRD	Hi Red	AlGaAs,SH	660	Diffused	1.85	2.20	20	80	60
BL-L512LRD	Super Red	AlGaAs,DH	660		1.85	2.20	50	120	
BL-L512URD	Ultra Red	AlGaAs,DDH	660		1.95	2.20	100	220	
BL-L512UED	Ultra Orange	AlGaInP	630		2.10	2.50	120	300	
BL-L512UYD	Ultra Yellow	AlGaInP	590		2.10	2.50	120	320	
BL-L512UGD	Ultra Green	AlGaInP	574		2.20	2.50	45	100	
BL-L512PGD	Ultra Pure Green	InGaN	525		3.80	4.50	400	900	
BL-L512BGD	Ultra Bluish Green	InGaN	505		3.80	4.50	300	800	
BL-L512UBD	Ultra Blue	InGaN	470		2.70	4.20	400	900	
BL-L512UWW	Ultra White	InGaN	/		2.70	4.20	1000	2000	


Round Type LED lamp

BL-L512

Absolute maximum ratings (Ta=25°C)

Parameter	SR	LR	UR	UE	UY	UG	PG	BG	B	UB	UV	W	Unit
Forward Current I_F	25	25	25	30	30	30	30	30	30	30	30	30	mA
Power Dissipation P_d	60	60	60	65	65	75	110	110	120	120	120	120	mW
Reverse Voltage V_R	5	5	5	5	5	5	5	5	5	5	5	5	V
Peak Forward Current I_{PF} (Duty 1/10 @1KHZ)	150	150	150	150	150	150	150	100	100	100	100	100	mA
Operation Temperature T_{OPR}	-40 to +80												°C
Storage Temperature T_{STG}	-40 to +85												°C
Lead Soldering Temperature TSOL	Max.260±5°C for 3 sec Max. (1.6mm from the base of the epoxy bulb)												°C

Package configuration & Internal circuit diagram

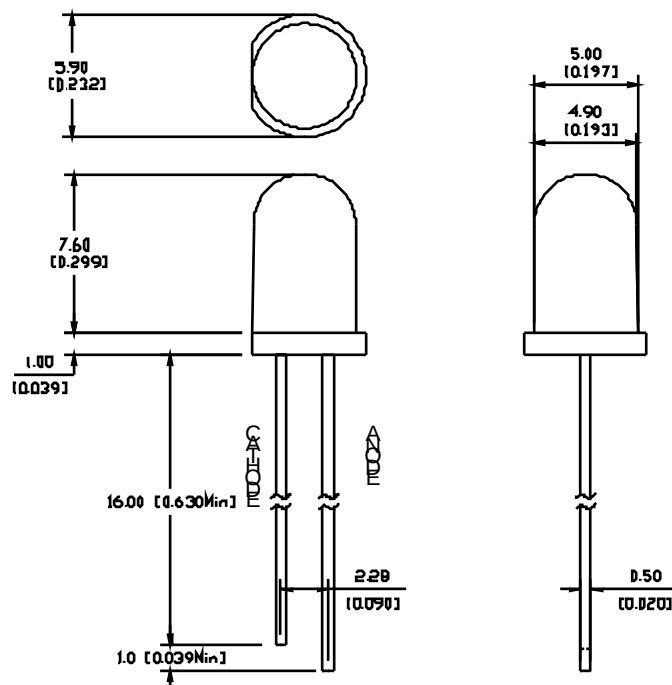


Notes:

1. All dimensions are in millimeters (inches)
2. Tolerance is ± 0.25 (0.01") unless otherwise noted.
3. Specifications are subject to change without notice.


Round Type LED lamp

BL-L512


Typical electrical-optical characteristics curves:

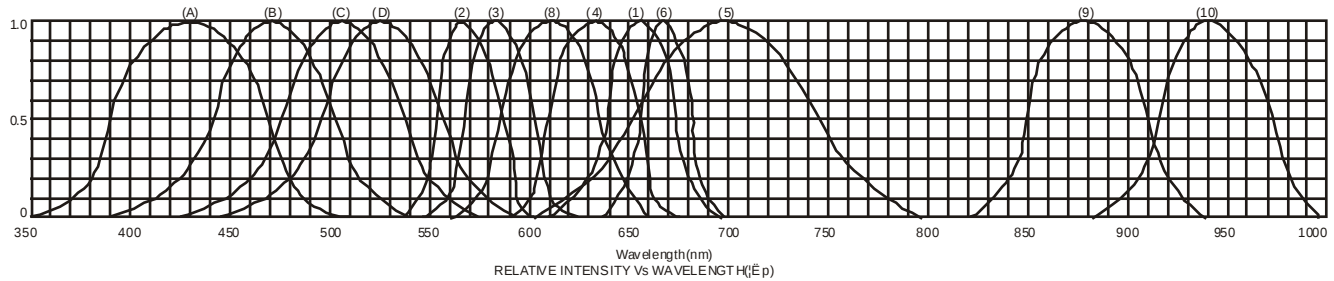


- | | |
|---|--------------------------------------|
| (1) - GaAsP/GaAs 655nm/Red | (9) - GaAlAs 880nm |
| (2) - GaP 570nm/Yellow Green | (10) - GaAs/GaAs & GaAlAs/GaAs 940nm |
| (3) - GaAsP/GaP 585nm/Yellow | (A) - GaN/SiC 430nm/Blue |
| (4) - GaAsP/GaP 635nm/Orange & Hi-Eff Red | (B) - InGaN/SiC 470nm/Blue |
| (5) - GaP 700nm/Bright Red | (C) - InGaN/SiC 505nm/Ultra Green |
| (6) - GaAlAs/GaAs 660nm/Super Red | (D) - InGaAl/SiC 525nm/Ultra Green |
| (8) - GaAsP/GaP 610nm/Super Red | |




FORWARD VOLTAGE (Vf)
FORWARD CURRENT VS.
FORWARD VOLTAGE





FORWARD CURRENT (mA)
RELATIVE LUMINOUS
INTENSITY VS. FORWARD
CURRENT

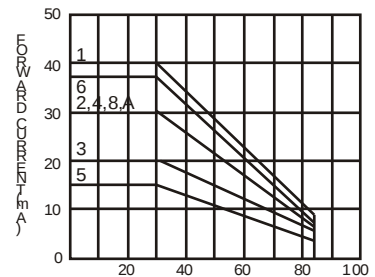

AMBIENT TEMPERATURE Ta(°C)
FORWARD CURRENT VS. AMBIENT
TEMPERATURE

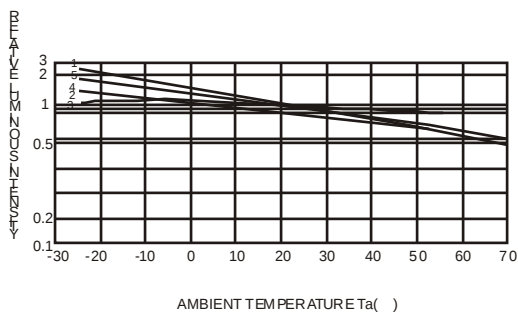

AMBIENT TEMPERATURE Ta(°C)

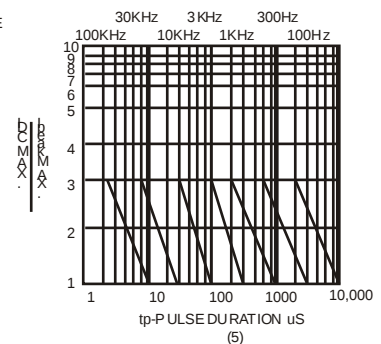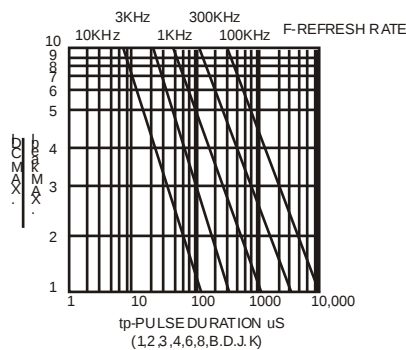

NOTE: 25 free air temperature unless otherwise specified

Round Type LED lamp

BL-L512

Packing and weighting

