| REV | MODIFICATION | DATE | DRN |
|---|---|---|---|
| 01 | DRAWING RELEASE ECN 06-229 | 05/10/06 | NJB |
| 02 | ECN 06-233 | 11/10/06 | NJB |
| 03 | CO2010372 | 03/09/08 | SF |
| 04 | CO2010405 | 23/09/08 | TC |
| 05 | CO2010642 | 01/05/09 | SF |

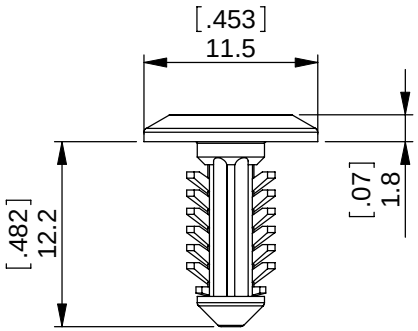


FIG 1

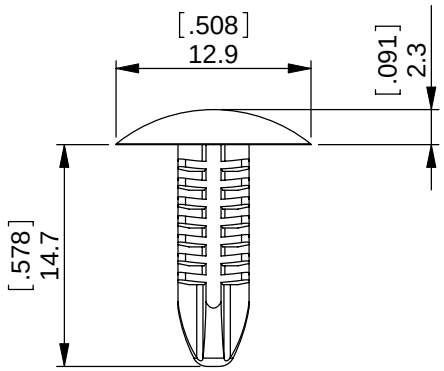


FIG 2

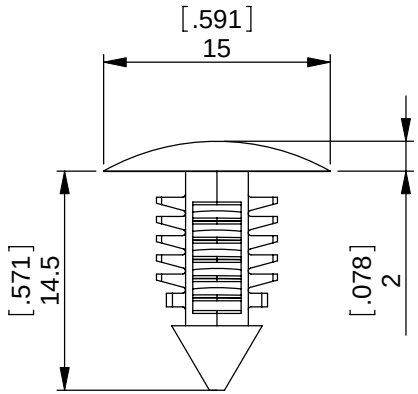


FIG 3

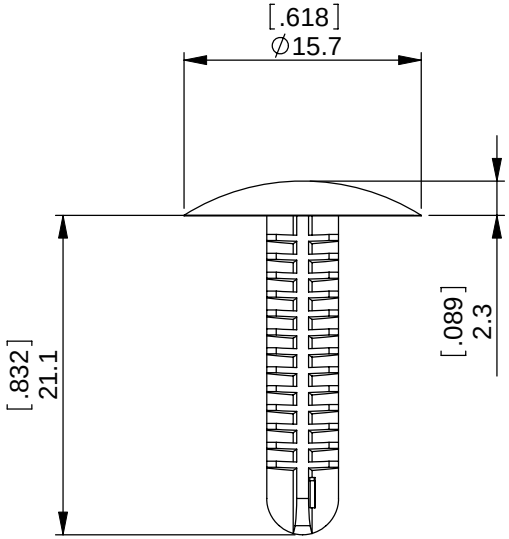


FIG 4

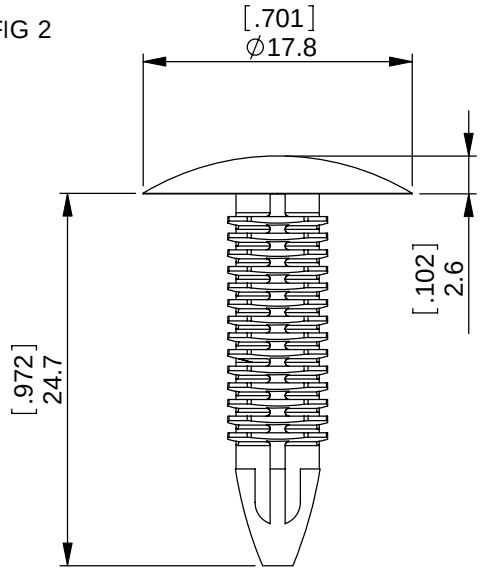


FIG 5

| Figure | Nylon 6/6 25% Glass Filled UL94 V-0 RMS-112 Colour: Black | Nylon 6/6 UL94 V-0, RMS-19 Colour: Black | Nylon 6/6 UL94 V-0, RMS-19 Colour: Natural | Nylon 6/6 UL94 V-2, RMS-01 Colour: Natural | Nylon 6/6 UL94 V-2, RMS-01 Colour: Black | Hole Diameter ± .08 (.003) | Panel Thickness |
|---|---|---|---|---|---|---|---|
| 1 | SPECIAL BPF-A414-GF | STANDARD BPF-A414 | SPECIAL BPF-A414-19NT | - | - | 4.7 [.185] | 0.8 - 3.0 [.031 - .118] |
| 2 | - | SPECIAL BPF-F4410-19 | - | SPECIAL BPF-F4410NT | STANDARD BPF-F4410 | 5.0 [.197] | 1.5 - 7.5 [.059 - .295] |
| 3 | - | STANDARD BPF-F2495 | - | - | - | 7.0 [.276] | 3.2 - 6.0 [.125 - .236] |
| 4 | - | STANDARD BPF-F3T31 | - | - | - | 5.0 [.197] | 2.0 - 10.0 [.079 - .394] |
| 5 | SPECIAL BPF-F1G12-GF | STANDARD BPF-F1G12 | - | - | - | 7.0 [.276] | 2.0 - 15.0 [.079 - .591] |

NOTE
1) OTHER COLOURS AVAILABLE BY SPECIAL ORDER.
EXAMPLE: BPF-A414-OR FOR ORANGE.

*INFORMATION CONTAINED IN THIS DOCUMENT IS CONFIDENTIAL TO RICHCO INTERNATIONAL Co. Ltd. AND MAY NOT BE DISCLOSED OR REPRODUCED IN WHOLE OR PART WITHOUT THEIR WRITTEN CONSENT.*

Richco®

GENERAL TOLERANCES ±0.25 [0.010]
UNLESS OTHERWISE STATED
1 DECIMAL PLACE ± 0.25 [.010]
2 DECIMAL PLACES ± 0.10 [.004]
ANGULAR ±1°

THIRD ANGLE

| | | | | | |
|---|---|---|---|---|---|
| MATERIAL: SEE TABLE | | | | COLOUR: SEE NOTE | |
| DESCRIPTION: Barbed Push Fastener | | | | PART No: SEE TABLE | |
| DRG No: 06-045 | | NPR No: | | | SHEET SIZE A4 |
| DRN NJB | DATE 02/05/06 | CHKD NBR | DATE 11/10/06 | SCALE NTS | SHEET No. 1 OF 1 |

FORM No. 0145/03