

Programmable unijunction transistor/ Silicon controlled switch

BRY39

FEATURES

- Silicon controlled switch
- Programmable unijunction transistor.

APPLICATIONS

- Switching applications such as:
 - Motor control
 - Oscillators
 - Relay replacement
 - Timers
 - Pulse shapers, etc.

DESCRIPTION

Silicon planar PNPN switch or trigger device in a TO-72 metal package. It is an integrated PNP/NPN transistor pair with all electrodes accessible.

PINNING

PIN	DESCRIPTION
1	cathode
2	cathode gate
3	anode gate (connected to case)
4	anode


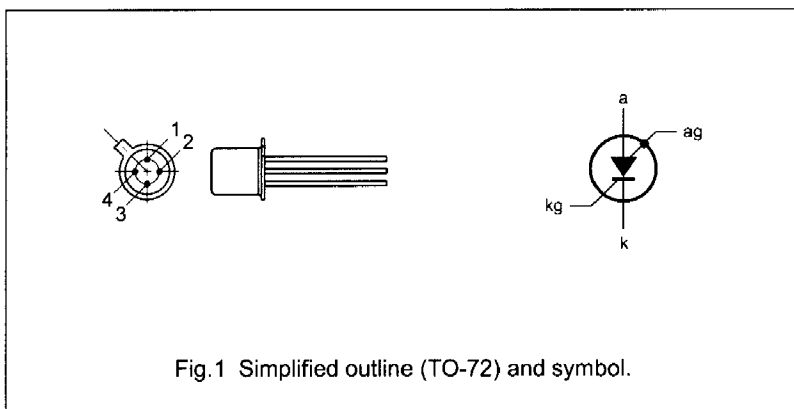


Fig.1 Simplified outline (TO-72) and symbol.

QUICK REFERENCE DATA

SYMBOL	PARAMETER	CONDITIONS	MAX.	UNIT
Silicon controlled switch				
PNP TRANSISTOR				
V_{EBO}	emitter-base voltage	open collector	-70	V
NPN TRANSISTOR				
V_{CBO}	collector-base voltage	open emitter	70	V
I_{ERM}	repetitive peak emitter current		-2.5	A
P_{tot}	total power dissipation	$T_{amb} \leq 25^\circ C$	275	mW
T_j	junction temperature		150	$^\circ C$
V_{AK}	forward on-state voltage	$I_A = 50 \text{ mA}; I_{AG} = 0; R_{KG-K} = 10 \text{ k}\Omega$	1.4	V
I_H	holding current	$I_{AG} = 10 \text{ mA}; V_{BB} = -2 \text{ V}; R_{KG-K} = 10 \text{ k}\Omega$	1	mA
t_{on}	turn-on time		0.25	μs
t_{off}	turn-off time		15	μs
Programmable unijunction transistor				
V_{GA}	gate-anode voltage		70	V
I_A	anode current (DC)	$T_{amb} \leq 25^\circ C$	175	mA
T_j	junction temperature		150	$^\circ C$
I_p	peak point current	$V_S = 10 \text{ V}; R_G = 10 \text{ k}\Omega$	0.2	μA

NJ Semi-Conductors reserves the right to change test conditions, parameter limits and package dimensions without notice. Information furnished by NJ Semi-Conductors is believed to be both accurate and reliable at the time of going to press. However, NJ Semi-Conductors assumes no responsibility for any errors or omissions discovered in its use. NJ Semi-Conductors encourages customers to verify that datasheets are current before placing orders.



Programmable unijunction transistor/
Silicon controlled switch

BRY39

LIMITING VALUES

In accordance with the Absolute Maximum Rating System (IEC 134).

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
P _{tot}	total power dissipation	T _{amb} ≤ 25 °C	–	275	mW
T _{stg}	storage temperature		–65	+200	°C
T _j	junction temperature		–	150	°C
T _{amb}	operating ambient temperature		–65	+150	°C
Silicon controlled switch					
V _{CBO}	collector-base voltage	open emitter	–	–70	V
	PNP		–	70	V
	NPN				
V _{CER}	collector-emitter voltage	R _{BE} = 10 kΩ	–	–	V
	PNP		–	70	V
	NPN				
V _{CEO}	collector-emitter voltage	open base	–	–70	V
	PNP		–	–	V
	NPN				
V _{EBO}	emitter-base voltage	open collector	–	–70	V
	PNP		–	5	V
	NPN				
I _C	collector current (DC)	note 1	–	–	
	PNP		–	175	mA
	NPN				
I _{CM}	peak collector current	note 2	–	–	
	PNP		–	175	mA
	NPN				
I _E	emitter current (DC)		–	175	mA
	PNP		–	–175	mA
	NPN				
I _{ERM}	repetitive peak emitter current	t _p = 10 μs; δ = 0.01	–	2.5	A
	PNP		–	–2.5	A
	NPN				
Programmable unijunction transistor					
V _{GA}	gate-anode voltage		–	70	V
I _A	anode current (AV)	T _{amb} ≤ 25 °C	–	175	mA

Programmable unijunction transistor/
Silicon controlled switch

BRY39

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
I_{ARM}	repetitive peak anode current	$t_p = 10 \mu s; \delta = 0.01$	–	2.5	A
I_{ASM}	non-repetitive peak anode current	$t_p = 10 \mu s; T_j = 150^\circ C$	–	3	A
di_A/dt	rate of rise of anode current	$I_A \leq 2.5 A$	–	20	A/ μs

Notes

1. Provided the I_E rating is not exceeded.
2. During switching on, the device can withstand the discharge of a capacitor of a maximum value of 500 pF. This capacitor is charged when the transistor is in cut-off condition, with a collector supply voltage of 160 V and a series resistance of 100 k Ω .

THERMAL CHARACTERISTICS

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
$R_{th j-a}$	thermal resistance from junction to ambient	in free air	450	K/W

CHARACTERISTICS

$T_{amb} = 25^\circ C$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	MAX.	UNIT
Silicon controlled switch					
INDIVIDUAL PNP TRANSISTOR					
I_{CEO}	collector cut-off current	$I_B = 0; V_{CE} = -70 V; T_j = 150^\circ C$	–	–10	μA
I_{EBO}	emitter cut-off current	$I_C = 0; V_{EB} = -70 V; T_j = 150^\circ C$	–	–10	μA
h_{FE}	DC current gain	$I_E = 1 mA; V_{CE} = -5 V$	3	15	
INDIVIDUAL NPN TRANSISTOR					
I_{CER}	collector cut-off current	$V_{CE} = 70 V; R_{BE} = 10 k\Omega$	–	100	nA
		$V_{CE} = 70 V; R_{BE} = 10 k\Omega; T_j = 150^\circ C$	–	10	μA
I_{EBO}	emitter cut-off current	$I_C = 0; V_{EB} = 5 V; T_j = 150^\circ C$	–	10	μA
V_{CEsat}	collector-emitter saturation voltage	$I_C = 10 mA; I_B = 1 mA$	–	0.5	V
V_{BEsat}	base-emitter saturation voltage	$I_C = 10 mA; I_B = 1 mA$	–	0.9	V
h_{FE}	DC current gain	$I_C = 10 mA; V_{CE} = 2 V$	50	–	
C_c	collector capacitance	$I_E = i_e = 0; V_{CB} = 20 V$	–	5	pF
C_e	emitter capacitance	$I_C = i_c = 0; V_{EB} = 1 V; f = 1 MHz$	–	25	pF
f_T	transition frequency	$I_C = 10 mA; V_{CE} = 2 V; f = 100 MHz$	100	–	MHz
COMBINED DEVICE					
V_{AK}	forward on-state voltage	$R_{KG-K} = 10 k\Omega$			
		$I_A = 50 mA; I_{AG} = 0$	–	1.4	V
		$I_A = 50 mA; I_{AG} = 0; T_j = -55^\circ C$	–	1.9	V
		$I_A = 1 mA; I_{AG} = 10 mA$	–	1.2	V
I_H	holding current	$V_{BB} = -2 V; I_{AG} = 10 mA; R_{KG-K} = 10 k\Omega; \text{ see Fig. 14}$	–	1	mA



Programmable unijunction transistor/
Silicon controlled switch

BRY39

PACKAGE OUTLINE

Metal-can cylindrical single-ended package; 4 leads

SOT18/9

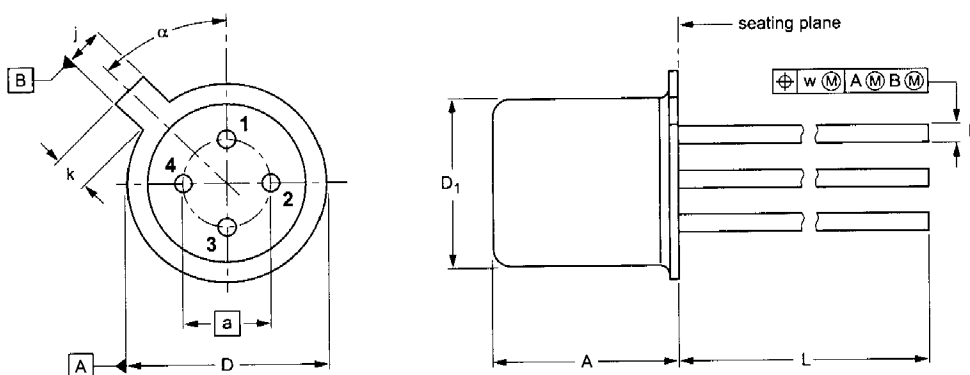

DIMENSIONS (millimetre dimensions are derived from the original inch dimensions)

UNIT	A	a	b	D	D ₁	j	k	L	w	α
mm	5.31 4.74	2.54	0.46 0.42	5.45 5.30	4.70 4.55	1.05 0.95	1.0 0.9	14.5 13.5	0.36	45°

OUTLINE VERSION	REFERENCES				EUROPEAN PROJECTION	ISSUE DATE
	IEC	JEDEC	EIAJ			
SOT18/9	B12/C7 type 3	TO-72				