

Thyristor Surge Suppressor

Version: A0 2013-11-19

Features

- Excellent capability of absorbing transient surge
- Quick response to surge voltage
- Eliminates overvoltage caused by fast rising transients
- Moisture sensitivity level: Level 1
- Weight:87mg
- Non degenerative

Exterior



SMB-F

Application information

- Ethernet

Package (Top View)



Agency Approvals

Icon	Description
RoHS	Compliance with 2011/65/EU
HF	Compliance with IEC61249-2-21:2003

Schematic Symbol



Part Number and Electrical Parameter

Part Number	IDRM@ V _{DRM}		V _S ^① @ I _S		V _T @ I _T		I _H	Co ^②
	μA	V	V	mA	V	A	mA	pF
	MAX		MAX		MAX		MAX	MAX
BS4200N-C-F	5	400	520	800	4	2.2	50	35

Absolute maximum ratings measured at TA= 25°C RH = 45%-75% (unless otherwise noted).

① V_S is measured at 100KV/S

② Off-state capacitance is measured in V_{DC}=2V, V_{RMS}=1V, f=1MHz

Thyristor Surge Suppressor

Version: A0 2013-11-19

Part Numbering System

BS 4200 N C F
(1) (2) (3) (4) (5)

- (1) Bencent Semiconductor Surge Arrester
(2) Off-state Voltage, e.g.: $4200=420 \times 10^0=420V$
(3) Package : SMB-F
(4) Rating Surge Voltage:6KV (10/700 μ s)
(5)Flat Feet


Mark



B42NC: Part Number
1309 :September,2013

V-I Curve

Parameters	Definition
V_{DRM}	Peak off-state voltage
I_{DRM}	Off-state Current
V_S	Switching Voltage
I_S	Switching Current
I_H	Holding Current
V_T	On-state voltage
I_T	On-state current
C_O	Off-state capacitance

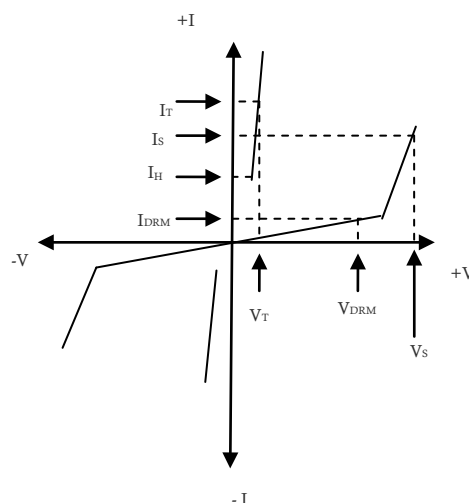

Surge Ratings

Current Waveform	2/10 μ s	8/20 μ s	10/160 μ s	5/320 μ s*	10/1000 μ s
Voltage Waveform	2/10 μ s	1.2/50 μ s	10/160 μ s	10/700 μ s*	10/1000 μ s
I_{pp}	500A	400A	200A	150A	100A

-Peak pulse current rating(I_{pp})is repetitive and guaranteed for the life of the product;






-Bencent only makes the test for 5/320 μ s@150A*(10/700 μ s@6KV), but for other IPP value derived from experience is just for reference only. Bencent will not take any obligation for these parameters, so before applying our parts, please make sure to verify the parameters listed in the above table.

Thermal Considerations

Symbol	Parameter	Value	Unit
T_J	Operating Junction Temperature Range	-40 to +150	$^{\circ}C$
T_S	Storage Temperature Range	-60 to +150	$^{\circ}C$

Product Characteristics

Lead Material	Copper Alloy
Body Material	UL recognized epoxy meeting flammability classification 94V-0
Terminal Finish	100% Matte-Tin Plated

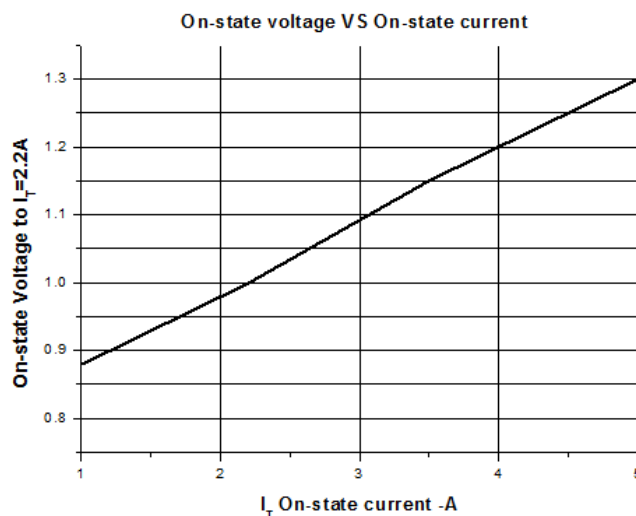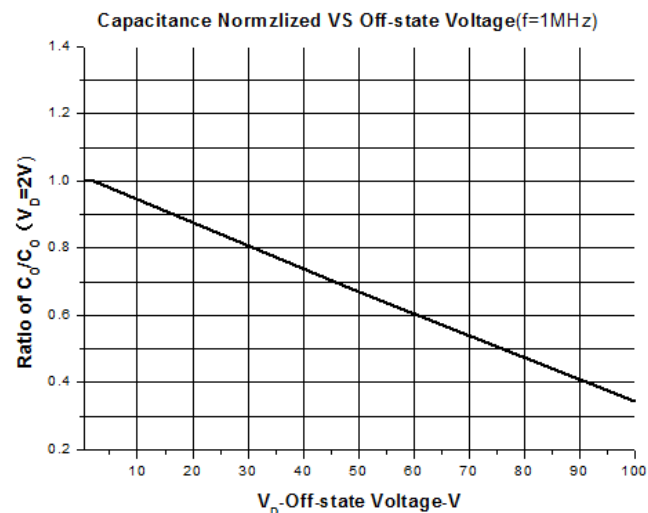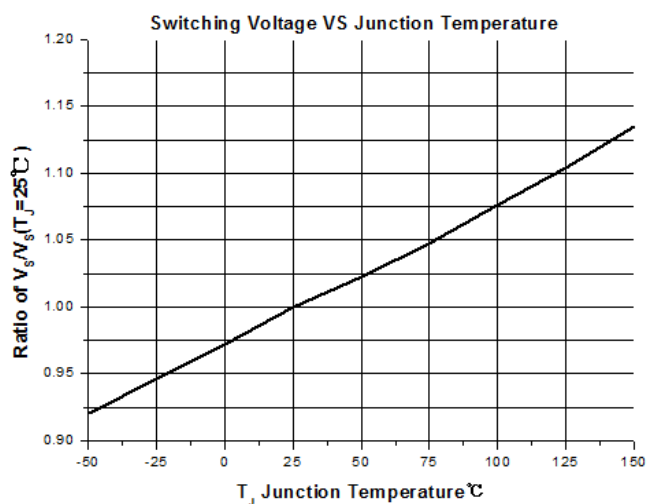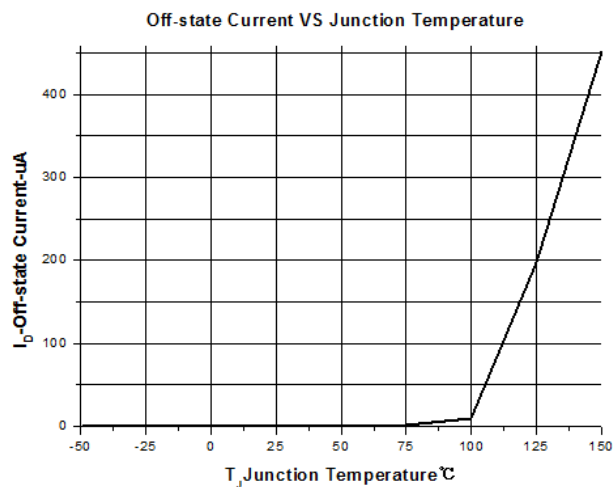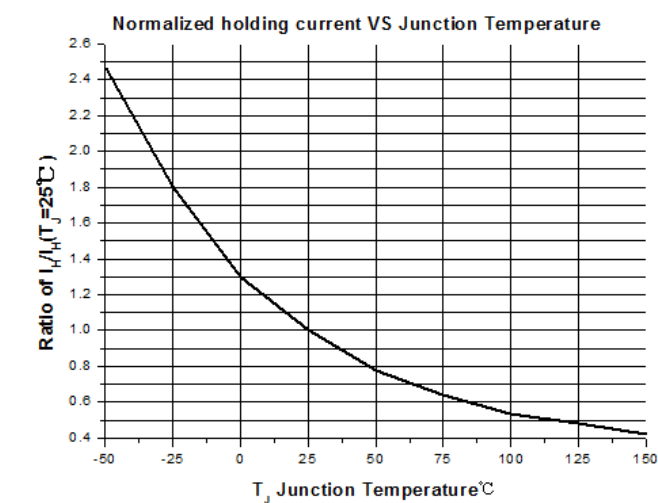


Thyristor Surge Suppressor

Version: A0 2013-11-19


Environmental Characteristics

Testing items	Technical standards
High temperature Reverse Bias Test	Temperature: $150\pm3^{\circ}\text{C}$ Bias= $80\%V_{\text{DRM}}$ Time:168H
High Temperature Life Test	Temperature: 150°C Time:168H
High-low Temperature Cycle test	Temperature: From -40°C to 125°C Dwell time : 30min ;10cycles
High Temperature &High Humidity Test	Temperature: 85°C Humidity:85% Test time:168H
Pressure cooker Test	Temperature: 121°C , 2atm. Humidity:100% Test time:24H
Resistance of soldering heat	Temperature: $260\pm5^{\circ}\text{C}$ Time of dip soldering: 10s, 3times

Note: The above testing items can be specified by customer's special request

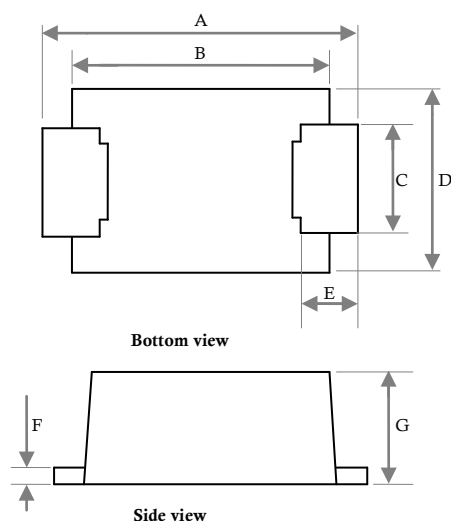Product Dimensions


REF	mm	inch
A	5.4 ± 0.3	0.213 ± 0.012
B	4.4 ± 0.2	0.173 ± 0.008
C	2.0 ± 0.1	0.079 ± 0.004
D	3.3 ± 0.3	0.130 ± 0.012
E	0.8 ± 0.3	0.032 ± 0.012
F	0.25 ± 0.05	0.010 ± 0.002
G	2 ± 0.3	0.079 ± 0.012

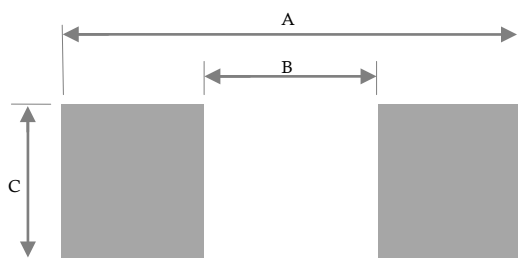Recommended Soldering Pad


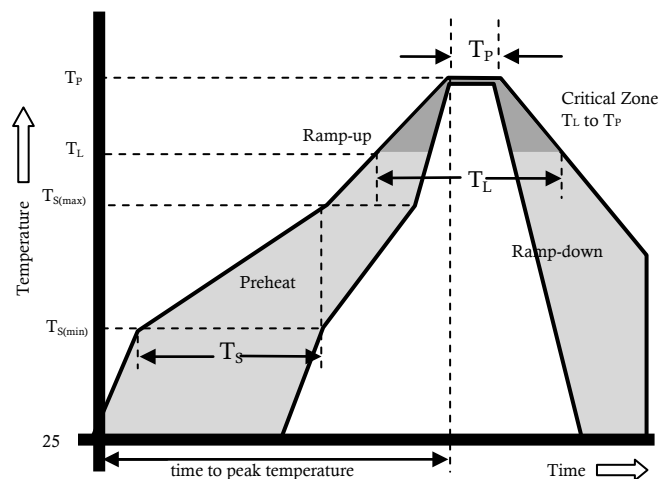
REF	mm	inch
A	6.4	0.252
B	3.4	0.134
C	2.75	0.108

Thyristor Surge Suppressor


Version: A0 2013-11-19

Reflow Profile

Reflow Condition		Pb-Free assembly
Pre Heat	Temperature Min	150°C
	Temperature Max	200°C
	Time (min to max)	60 – 180 secs
Average ramp up rate (Liquid) T _{amp} (T _L) to peak		3°C/second max
TS(max) to TL - Ramp-up Rate		3°C/second max
Reflow	- Temperature (T _L) (Liquid)	217°C
	- Temperature (T _L)	60 – 150 seconds
Peak Temperature (T _P)		260+0/-5 °C
Time within 5°C of actual peak Temperature (T _P)		8 – 15 seconds
Ramp-down Rate		6°C/second max
Time 25°C to peak Temperature (T _P)		8 minutes Max.
Do not exceed		260°C



Package Reel Information

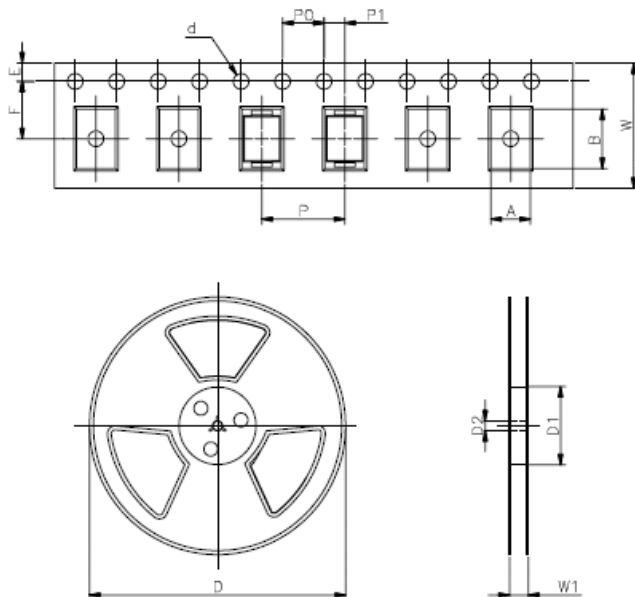

REF	mm	inch
A	3.65+/-0.3	0.144+/-0.012
B	5.69+/-0.3	0.244+/-0.012
d	1.5+/-0.1	0.059+/-0.004
D	330.0	13.0
D1	100+/-3	3.937+/-0.118
D2	13+/-0.3	0.512+/-0.012
E	1.5+/-0.2	0.059+/-0.008
F	5.65+/-0.2	0.222+/-0.008
P	8.0+/-0.2	0.315+/-0.008
P0	4.0+/-0.2	0.157+/-0.008
P1	2.0+/-0.2	0.079+/-0.008
W	12.0+/-0.2	0.472+/-0.008
W1	16.8+/-2.0	0.661+/-0.079

OUTLINE	REEL (PCS)	PER CARTON (PCS)	REEL DIAMETERS (mm)	CARTON SIZE(mm)		
				L	W	H
TAPING	3,000	24,000	330	360	360	380