
isc Triacs BTA08-400SW

FEATURES

- With TO-220AB insulated package
- Suitables for general purpose AC switching. Which can be used as an ON/OFF function in applications such as static relays, heating regulation,induction motor starting circuits. Or for phase control operation in light dimmers, motor speed controllers etc.
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

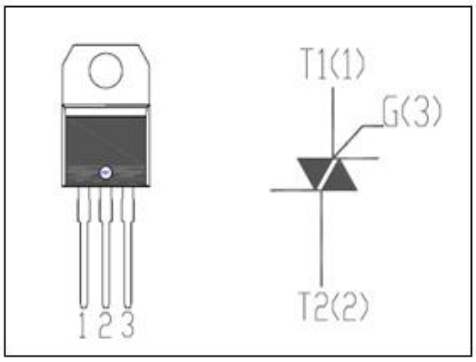

ABSOLUTE MAXIMUM RATINGS(Ta=25℃)

SYMBOL	PARAMETER		MIN	UNIT
V_{DRM}	Repetitive peak off-state voltage		400	V
V_{RRM}	Repetitive peak off-state voltage		400	V
$I_{T(RMS)}$	RMS on-state current (full sine wave)Tc=75℃		8	A
I_{TSM}	Non-repetitive peak on-state current	50HZ 60HZ	80 84	A
T_j	Operating junction temperature		110	℃
T_{stg}	Storage temperature		-40~150	℃
$R_{th(j-c)}$	Thermal resistance, junction to case		4.4	℃/W
$R_{th(j-a)}$	Thermal resistance, junction to ambient		60	℃/W

ELECTRICAL CHARACTERISTICS (T_C=25℃ unless otherwise specified)

SYMBOL	PARAMETER		CONDITIONS	MAX	UNIT
I_{RRM}	Repetitive peak reverse current		$V_R=V_{RRM}$, $V_R=V_{RRM}$, Tj=110℃	0.01 0.75	mA
I_{DRM}	Repetitive peak off-state current		$V_D=V_{DRM}$, $V_D=V_{DRM}$, Tj=110℃	0.01 0.75	mA
I_{GT}	Gate trigger current	I	V_D=12V; R_L= 33Ω	10	mA
		II		10	
		III		10	
I_H	Holding current		I_{GT}= 0.1A, Gate Open	25	mA
V_{GT}	Gate trigger voltage all quadrant		V_D=12V; R_L= 33Ω	1.5	V
V_{TM}	On-state voltage		I_T= 11A; t_p= 380 μs	1.75	V

Download from alldatasheet.com