
25A TRIACS




TO-220

■ DESCRIPTION

The UTC **BTB24A** is a 25A triacs which can be operated in 3 quadrants, it uses UTC's advanced technology to provide customers with high commutation performances.

The UTC **BTB24A** is suitable for inductive load switching operations, also can be used in ON/OFF function applications such as induction motor starting circuits, heating regulation, static relays etc.

■ SYMBOL



■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
BTB24AL-x-xx-TA3-T	BTB24AG-x-xx-TA3-T	TO-220	MT1	MT2	G	Tube

BTB24AL-x-xx-TA3-T

(1)Packing Type
(2)Package Type
(3)Sensitivity and type
(4)Voltage
(5)Lead Free


(1) T: Tube
(2) TA3: TO-220
(3) refer to SENSITIVITY AND TYPE
(4) 6: 600V, 8: 800V
(5) L: Lead Free, G: Halogen Free

■ SENSITIVITY AND TYPE

PART NUMBER	VOLTAGE		SENSITIVITY	TYPE
	600V	800V		
BW	◎	◎	50mA	SNUBBERLESS
CW	◎	◎	35mA	SNUBBERLESS

◎: Available

■ MARKING

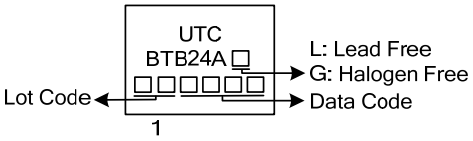

Copyright © 2013 Unisonic Technologies Co., Ltd

■ ABSOLUTE MAXIMUM RATINGS

PARAMETER			SYMBOL	RATINGS	UNIT
RMS On-State Current (Full Sine Wave)		T_C=75°C	$I_{T(RMS)}$	25	A
Non Repetitive Surge Peak On-State Current (Full Cycle, T_J initial=25°C)	F=50 Hz	t=20ms	I_{TSM}	250	A
	F=60 Hz	t=16.7ms		260	A
I^2t Value for Fusing	t_P=10ms		I^2t	340	A^2s
Critical Rate of Rise of On-State Current I_G=2xI_{GT}, tr≤100ns	F=120 Hz	T_J=125°C	dI/dt	50	A/μs
Non Repetitive Surge Peak Off-State Voltage	t_P=10ms	T_J=25°C	V_{DSM}/V_{RSM}	V_{DRM}/V_{RRM}+100	V
Peak Gate Current	t_P=20μs	T_J=125°C	I_{GM}	4	A
Average Gate Power Dissipation		T_J=125°C	$P_{G(AV)}$	1	W
Operating Junction Temperature			T_J	-40~+125	°C
Storage Junction Temperature			T_{STG}	-40~+150	°C

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ THERMAL RESISTANCES

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	60	°C/W
Junction to Case (AC)	θ_{JC}	0.8	°C/W

■ ELECTRICAL CHARACTERISTICS (T_J=25°C unless otherwise specified.)

PARAMETER	SYMBOL	TEST CONDITIONS		CW			BW			UNIT
				MIN	TYP	MAX	MIN	TYP	MAX	
SNUBBERLESS TYPE (3 QUADRANTS)										
Gate Trigger Current (Note 1)	I_{GT}	V_D=12V, R_L=33Ω	I-II-III			35			50	mA
Gate Trigger Voltage	V_{GT}		I-II-III			1.3			1.3	V
Gate Non-Trigger Voltage	V_{GD}	V_D=V_{DRM}, R_L=3.3kΩ, T_J=125°C	I-II-III	0.2			0.2			V
Holding Current (Note 2)	I_H	I_T=500mA				50			75	mA
Latching Current	I_L	I_G=1.2I_{GT}	I-III			70			80	mA
			II			80			100	mA
Critical Rate of Rise of Off-State Voltage (Note 2)	dV/dt	V_D=67%V_{DRM}, Gate Open, T_J=125°C		500			1000			V/μs
Critical Rate of Rise of Off-State Voltage at Commutation (Note 2)	(dI/dt)c	Without Snubber, T_J=125°C		13			22			A/ms

■ STATIC CHARACTERISTICS

PARAMETER	SYMBOL	TEST CONDITIONS		MIN	TYP	MAX	UNIT
Peak On-State Voltage (Note 2)	V_{TM}	I_{TM}=35A, t_P=380μs	T_J=25°C			1.55	V
Threshold Voltage (Note 2)	V_{TO}		T_J=125°C			0.85	V
Dynamic Resistance (Note 2)	R_D		T_J=125°C			16	mΩ
Repetitive Peak Off-State Current	I_{DRM}	V_{DRM}=V_{RRM}	T_J=25°C			5	μA
	I_{RRM}		T_J=125°C			3	mA

Notes: 1. Minimum I_{GT} is guaranteed at 5% of I_{GT} max.
2. For both polarities of MT2 referenced to MT1.

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.