SIPMOS ® Power Transistor

- N channel
- Enhancement mode
- Avalanche-rated
- d*v*/d*t* rated
- Ultra low on-resistance
- 175°C operating temperature
- also in TO-220 SMD available

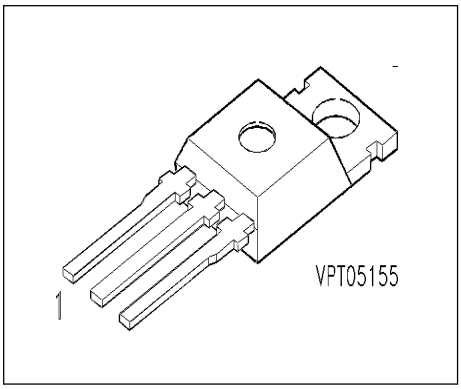

Pin 1	Pin 2	Pin 3
G	D	S

Type	V_{DS}	I_D	$R_{DS(on)}$	Package	Ordering Code
BUZ 100	50 V	60 A	0.018 Ω	TO-220 AB	C67078-S1348-A2

Maximum Ratings

Parameter	Symbol	Values	Unit
Continuous drain current T_C = 101 °C	I_D	60	A
Pulsed drain current T_C = 25 °C	I_{Dpuls}	240	
Avalanche energy, single pulse I_D = 60 A, V_{DD} = 25 V, R_{GS} = 25 Ω L = 70 µH, T_j = 25 °C	E_{AS}	250	mJ
Reverse diode d*v*/d*t* I_S = 60 A, V_{DS} = 40 V, di_F/dt = 200 A/µs T_{jmax} = 175 °C	d*v*/d*t*	6	kV/µs
Gate source voltage	V_{GS}	± 20	V
Power dissipation T_C = 25 °C	P_{tot}	250	W
Operating temperature	T_j	-55 ... + 175	°C
Storage temperature	T_{stg}	-55 ... + 175	
Thermal resistance, chip case	R_{thJC}	≤ 0.6	K/W
Thermal resistance, chip to ambient	R_{thJA}	≤ 75	
DIN humidity category, DIN 40 040		E	
IEC climatic category, DIN IEC 68-1		55 / 175 / 56	

Electrical Characteristics, at T_j = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Static Characteristics					
Drain- source breakdown voltage V_{GS} = 0 V, I_D = 0.25 mA, T_j = -40 °C	$V_{(BR)DSS}$	50	-	-	V
Gate threshold voltage V_{GS}=V_{DS}, I_D = 1 mA	$V_{GS(th)}$	2.1	3	4	
Zero gate voltage drain current	I_{DSS}				
V_{DS} = 50 V, V_{GS} = 0 V, T_j = 25 °C		-	0.1	1	µA
V_{DS} = 50 V, V_{GS} = 0 V, T_j = -40 °C		-	1	100	nA
V_{DS} = 50 V, V_{GS} = 0 V, T_j = 150 °C		-	10	100	µA
Gate-source leakage current V_{GS} = 20 V, V_{DS} = 0 V	I_{GSS}	-	10	100	nA
Drain-Source on-resistance V_{GS} = 10 V, I_D = 60 A	$R_{DS(on)}$	-	0.013	0.018	Ω

Electrical Characteristics, at T_j = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Dynamic Characteristics					
Transconductance $V_{DS} \geq 2 * I_D * R_{DS(on)max}$, I_D = 60 A	g_{fs}	25	39	-	S
Input capacitance V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz	C_{iss}	-	2400	3200	pF
Output capacitance V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz	C_{oss}	-	800	1200	
Reverse transfer capacitance V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz	C_{rss}	-	300	450	
Turn-on delay time V_{DD} = 30 V, V_{GS} = 10 V, I_D = 3 A R_{GS} = 50 Ω	$t_{d(on)}$	-	40	60	ns
Rise time V_{DD} = 30 V, V_{GS} = 10 V, I_D = 3 A R_{GS} = 50 Ω	t_r	-	100	150	
Turn-off delay time V_{DD} = 30 V, V_{GS} = 10 V, I_D = 3 A R_{GS} = 50 Ω	$t_{d(off)}$	-	250	335	
Fall time V_{DD} = 30 V, V_{GS} = 10 V, I_D = 3 A R_{GS} = 50 Ω	t_f	-	140	190	

Electrical Characteristics, at T_j = 25°C, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Reverse Diode					
Inverse diode continuous forward current T_C = 25 °C	I_S	-	-	60	A
Inverse diode direct current,pulsed T_C = 25 °C	I_{SM}	-	-	240	
Inverse diode forward voltage V_{GS} = 0 V, I_F = 120 A	V_{SD}	-	1.4	1.8	V
Reverse recovery time V_R = 30 V, I_F=I_S, di_F/dt = 100 A/µs	t_{rr}	-	70	-	ns
Reverse recovery charge V_R = 30 V, I_F=I_S, di_F/dt = 100 A/µs	Q_{rr}	-	0.16	-	µC

Power dissipation

$P_{tot} = f(T_C)$

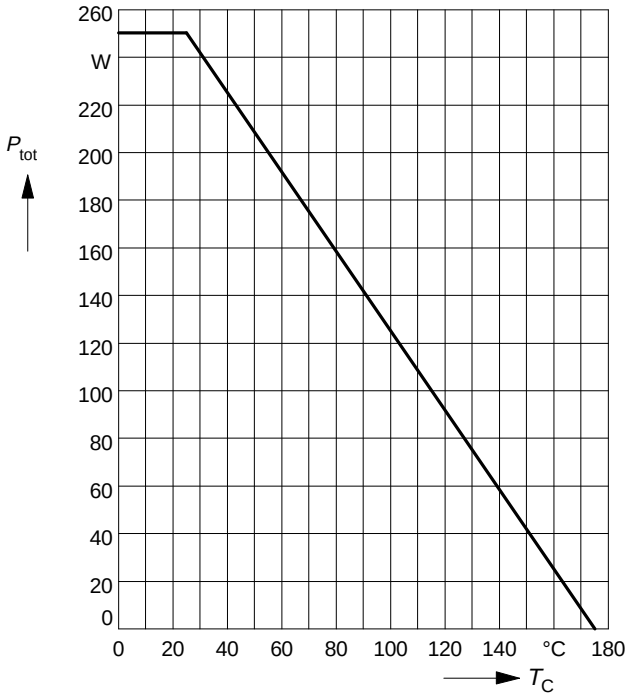

Drain current

$I_D = f(T_C)$

parameter: $V_{GS} \geq 10$ V

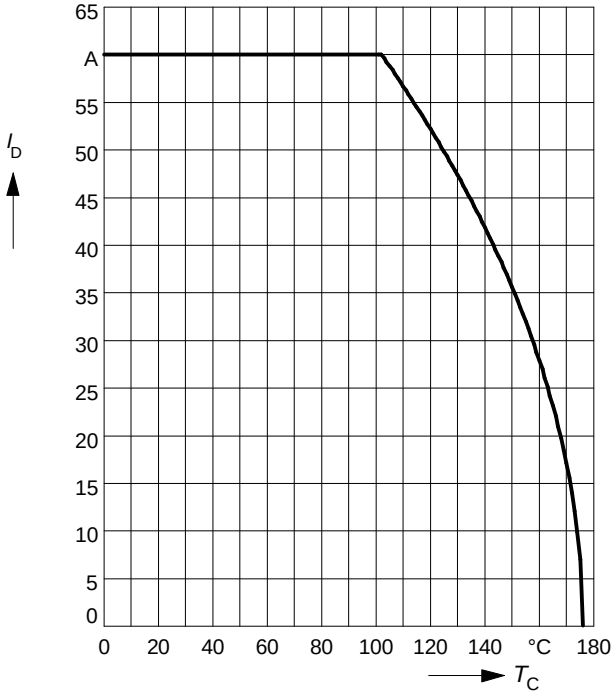

Safe operating area

$I_D = f(V_{DS})$

parameter: $D = 0.01$, $T_C = 25$°C

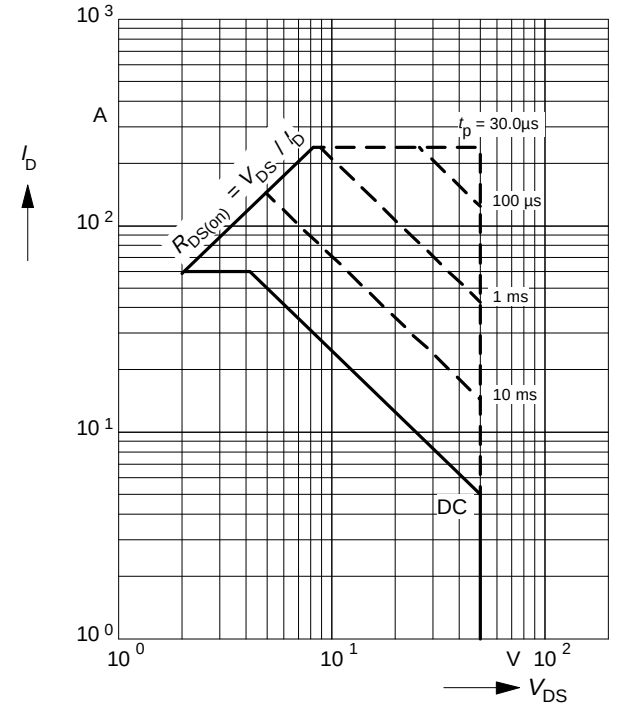

Transient thermal impedance

$Z_{th\,JC} = f(t_p)$

parameter: $D = t_p / T$

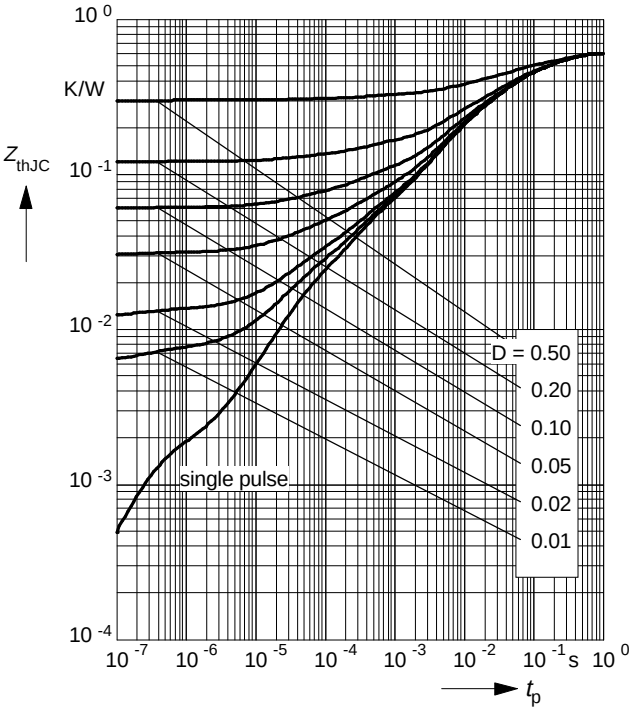

Typ. output characteristics
$I_D = f(V_{DS})$
parameter: t_p = 80 µs

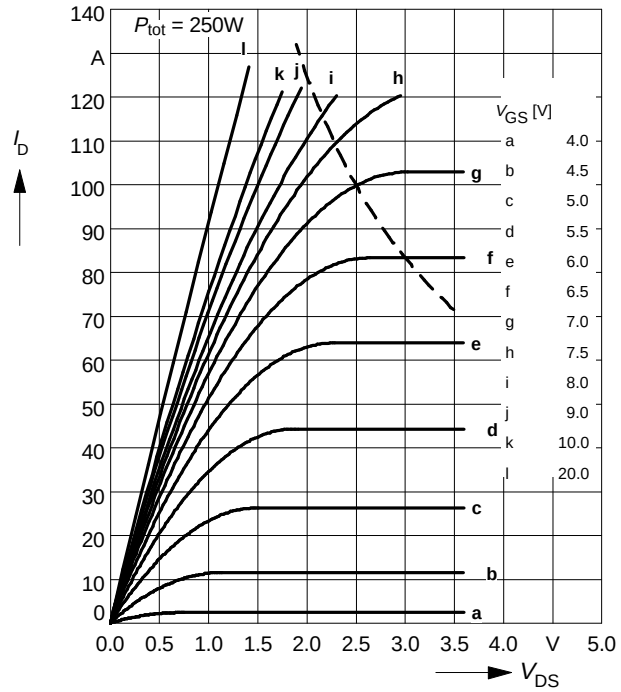

Typ. drain-source on-resistance
$R_{DS\ (on)} = f(I_D)$
parameter: V_{GS}

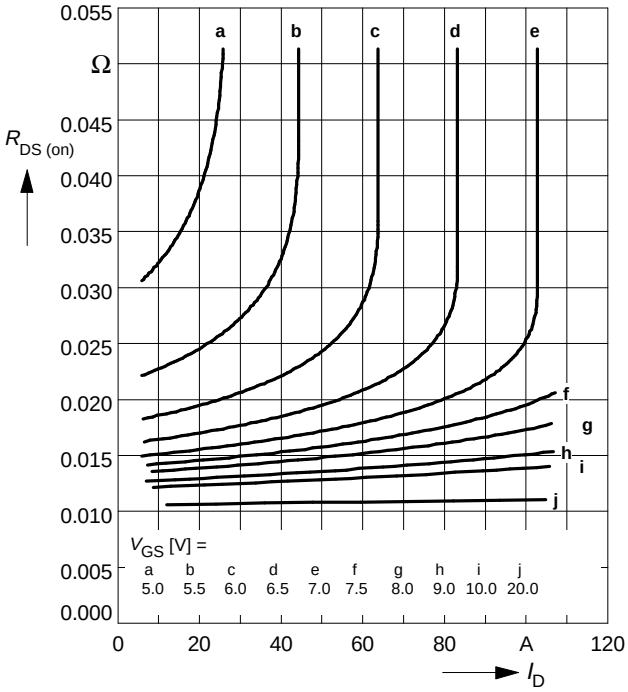

Typ. transfer characteristics $I_D = f(V_{GS})$
parameter: t_p = 80 µs
$V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$

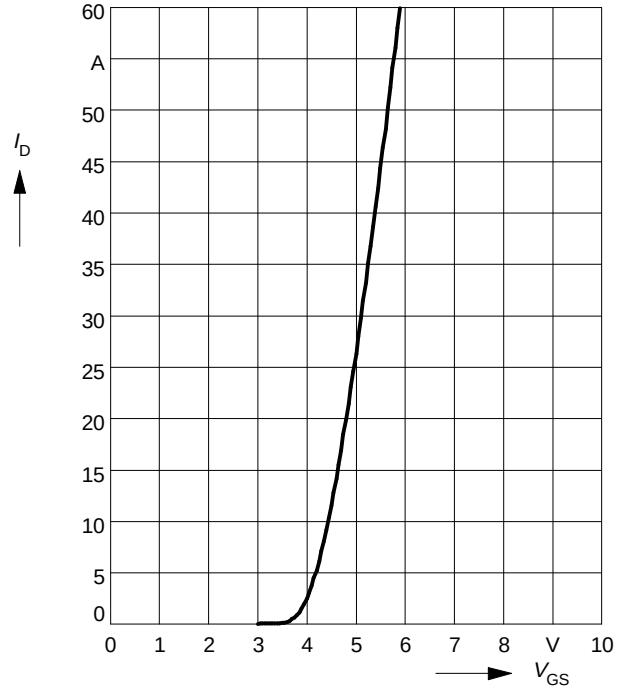

Typ. forward transconductance $g_{fs} = f(I_D)$
parameter: t_p = 80 µs,
$V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$

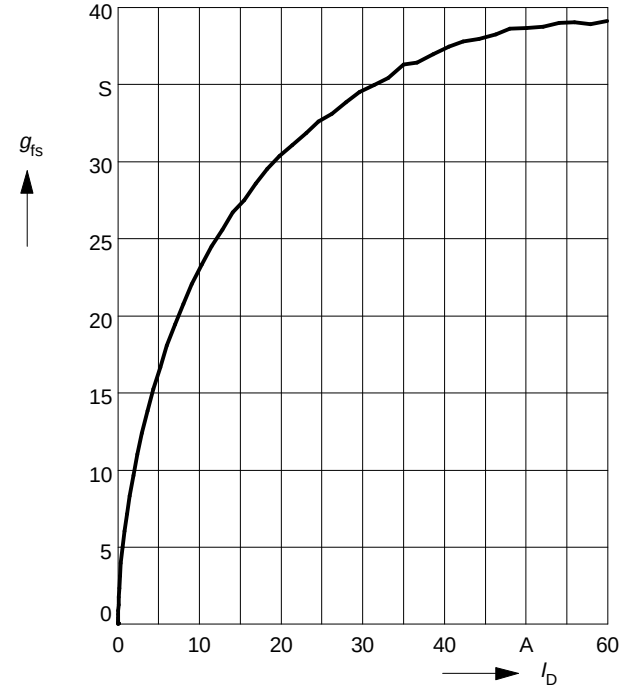

Drain-source on-resistance

$R_{DS\ (on)} = f(T_j)$

parameter: I_D = 60 A, V_{GS} = 10 V

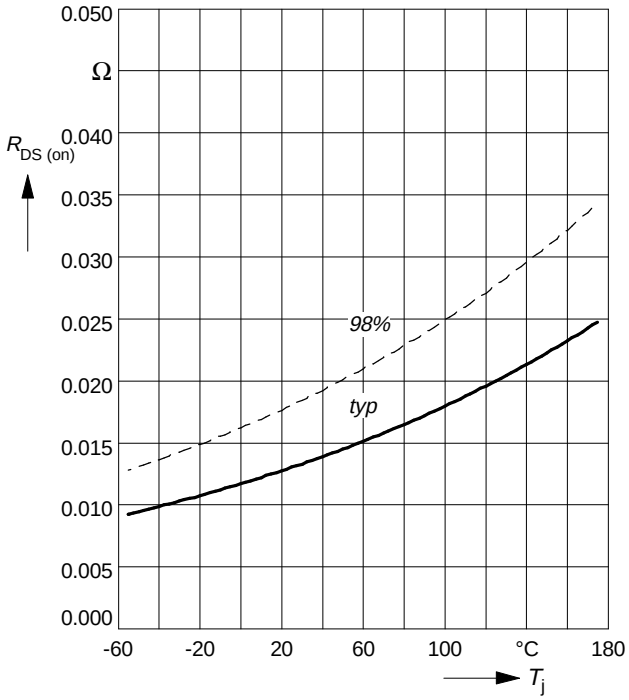

Gate threshold voltage

$V_{GS\ (th)} = f(T_j)$

parameter: $V_{GS} = V_{DS}$, I_D = 1 mA

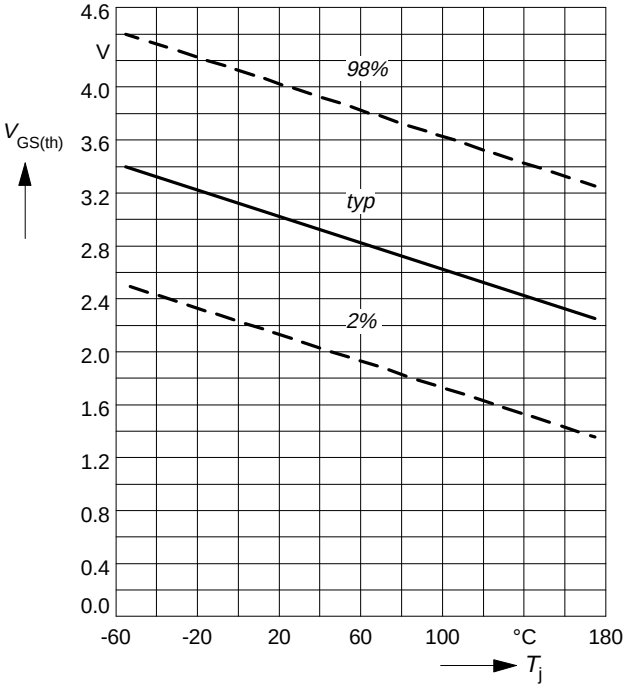

Typ. capacitances

$C = f(V_{DS})$

parameter: V_{GS} = 0V, f = 1MHz

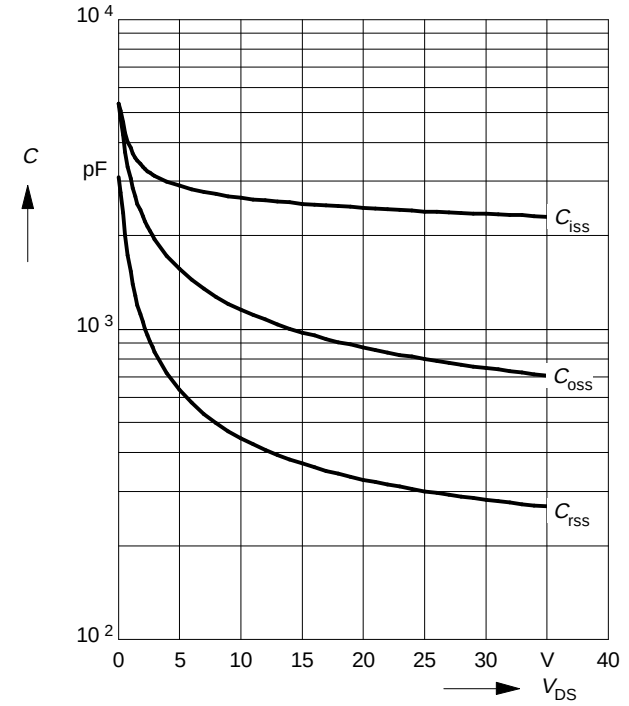

Forward characteristics of reverse diode

$I_F = f(V_{SD})$

parameter: T_j, t_p = 80 µs

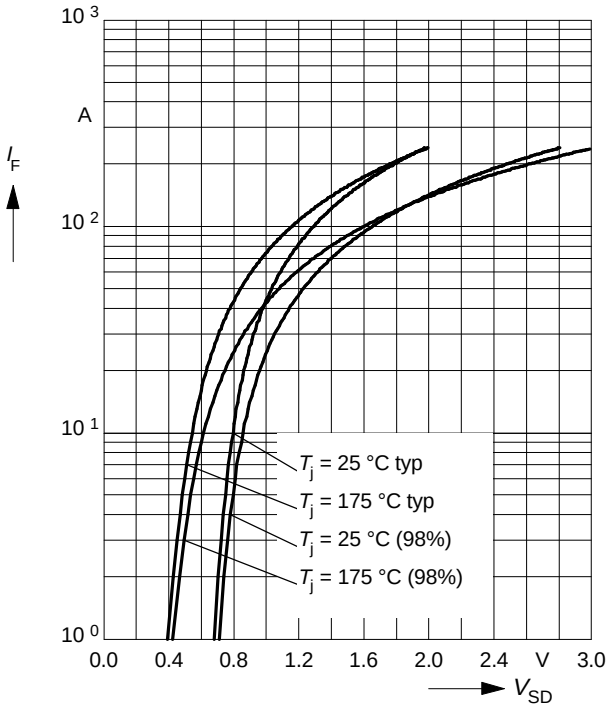

Avalanche energy $E_{AS} = f(T_j)$
parameter: I_D = 60 A, V_{DD} = 25 V
R_{GS} = 25 Ω, L = 70 µH

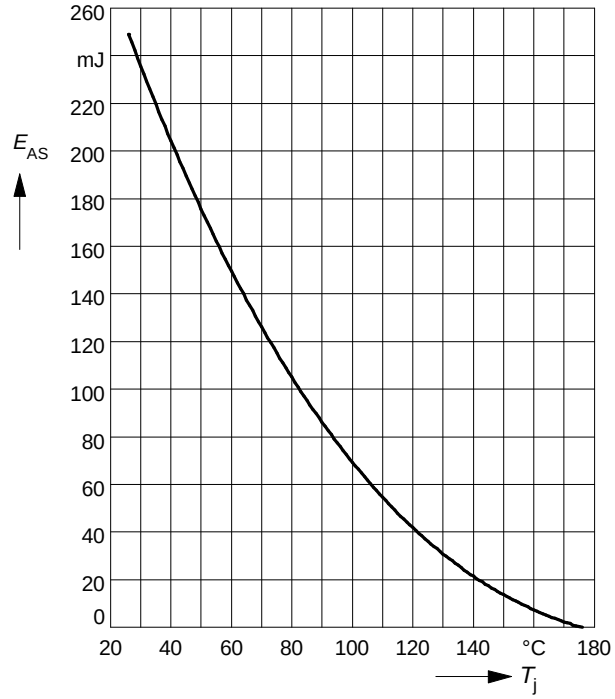

Typ. gate charge
$V_{GS} = f(Q_{Gate})$
parameter: $I_{D\ puls}$ = 90 A

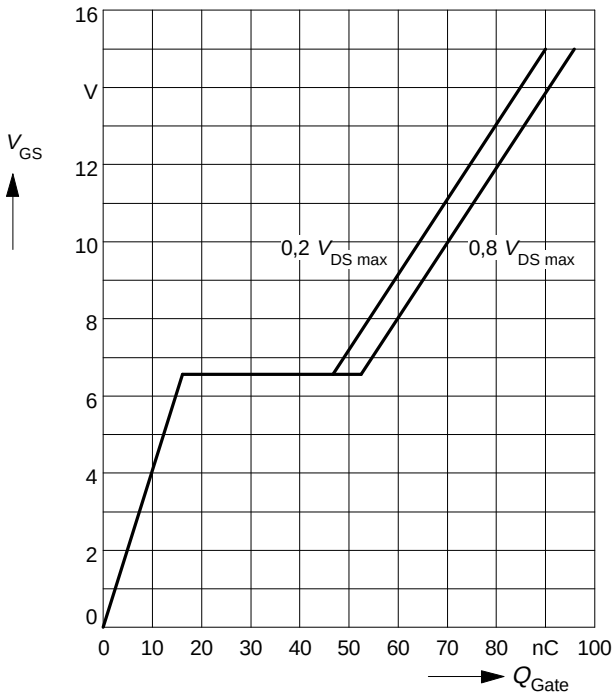

Drain-source breakdown voltage
$V_{(BR)DSS} = f(T_j)$

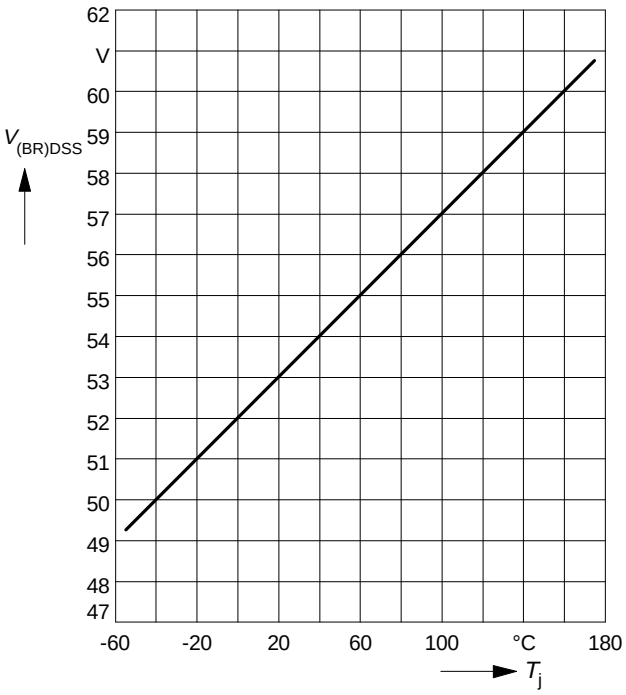

Package Outlines

TO-220 AB

Dimension in mm

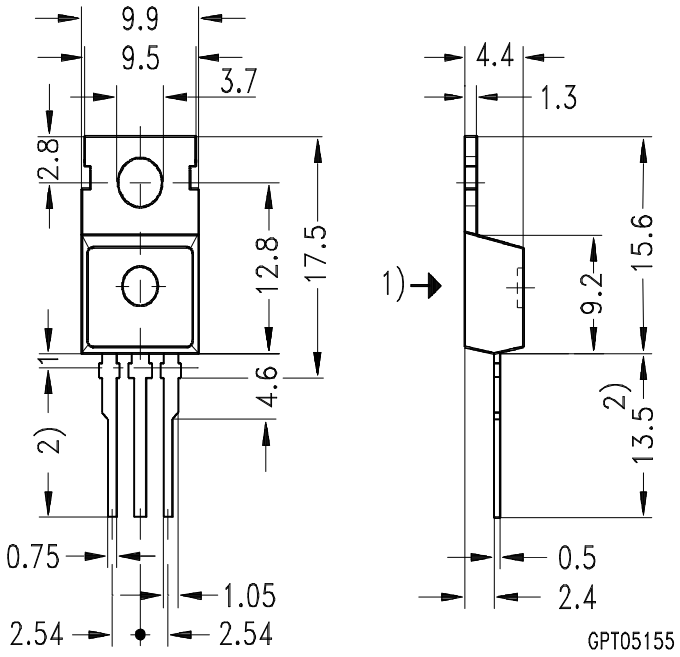

1) punch direction, burr max. 0.04

2) dip tinning

3) max. 14.5 by dip tinning press burr max. 0.05