



FAST RECOVER RECTIFIER

BY296 THRU BY299

VOLTAGE RANGE
CURRENT


100 to 800 Volts
2 .0Ampere

FEATURES

- Low coat construction
- Fast switching for high efficiency.
- Low reverse leakage
- High forward surge current capability
- High temperature soldering guaranteed:
260°C/10 secods/.375”(9.5mm)lead length at 5 lbs(2.3kg) tension

MECHANICAL DATA

- Case: Transfer molded plastic
- Epoxy: UL94V-O rate flame retardant
- Polarity: Color band denotes cathode end
- Lead: Plated axial lead, solderable per MIL-STD-202E method 208C
- Mounting position: Any
- Weight: 0.014 ounce, 0.39 grams



Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

- Ratings at 25°C ambient temperature unless otherwise specified
- Single Phase, half wave, 60Hz, resistive or inductive load
- For capacitive load derate current by 20%

		SYMBOLS	BY296	BY297	BY298	BY299	UNITS
Maximum Repetitive Peak Reverse Voltage		V _{RRM}	100	200	400	800	Volts
Maximum RMS Voltage		V _{RMS}	70	140	280	560	Volts
Maximum DC Blocking Voltage		V _{DC}	100	200	400	800	Volts
Maximum Average Forward Rectified Current 0.375”(9.5mm) lead length at T _A = 75°C		I _(AV)	2.0				Amp
Peak Forward Surge Current 8.3mS single half sine wave superimposed on rated load (JEDEC method)		I _{FSM}	70				Amps
Maximum Instantaneous Forward Voltage @ 2.0A		V _F	1.3				Volts
Maximum DC Reverse Current at Rated DC Blocking Voltage	T _A = 25°C	I _R	5.0				μA
	T _A = 100°C		200				
Maximum Reverse Recovery Time (Note 3) T _J =25°C		t _{rr}	500				ns
Typical Junction Capacitance (Note 1)		C _J	25				pF
Typical Thermal Resistance (Note 2)		R _{0JA}	40				°C/W
Operating Junction Temperature Range		T _J	(-55 to +150)				°C
Storage Temperature Range		T _{STG}	(-55 to +150)				°C

Notes:

- 1.Measured at 1.0MHz and Applied Reverse Voltage of 4.0Volts.
- 2 Thermal Resistance from junction to Ambient at .375”(9.5mm)lead length, P.C.board mounted.
- 3.Reverse Recovery Test Conditions: $I_f = 10\text{mA}$, $I_r = 10\text{mA}$, $I_{rr} = 1\text{A}$



FAST RECOVER RECTIFIER

BY296 THRU BY299

VOLTAGE RANGE
CURRENT

100 to 800 Volts
2.0 Ampere

RATING AND CHARACTERISTIC CURVES BY296 THRU BY299





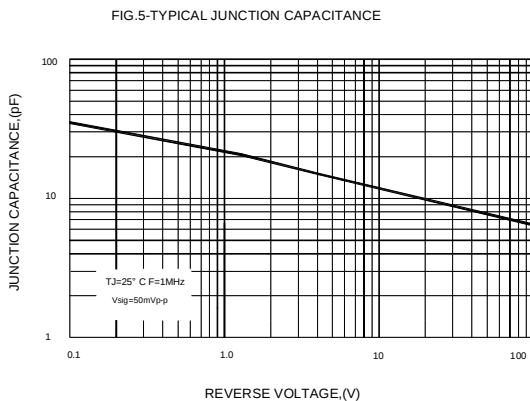


FIG.6-TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

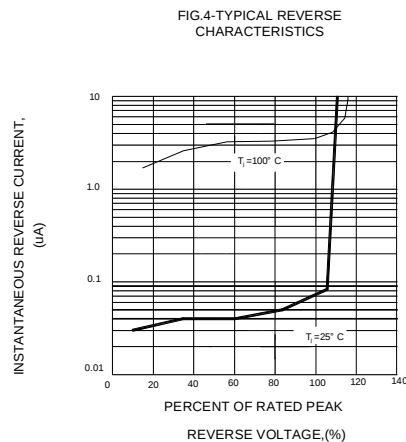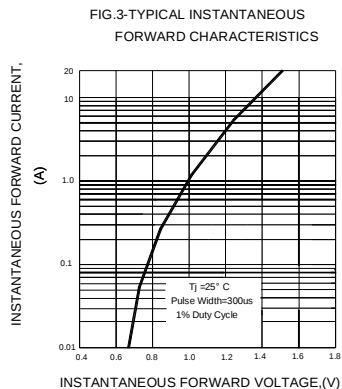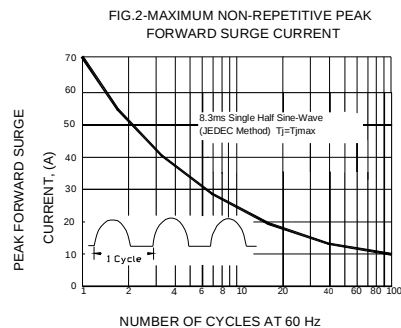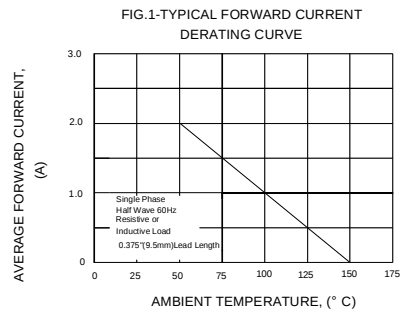