

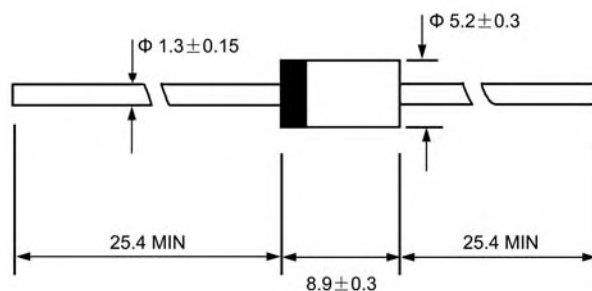
DO - 27

Features

- ◇ Low cost
- ◇ Diffused junction
- ◇ Low leakage
- ◇ Low forward voltage drop
- ◇ High current capability
- ◇ Easily cleaned with Freon, Alcohol, Isopropanol and similar solvents
- ◇ The plastic material carries U/L recognition 94V-0

Mechanical Data

- ◇ Case: JEDEC DO-27, molded plastic
- ◇ Polarity: Color band denotes cathode
- ◇ Weight: 0.041 ounces, 1.15 grams
- ◇ Mounting position: Any



Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

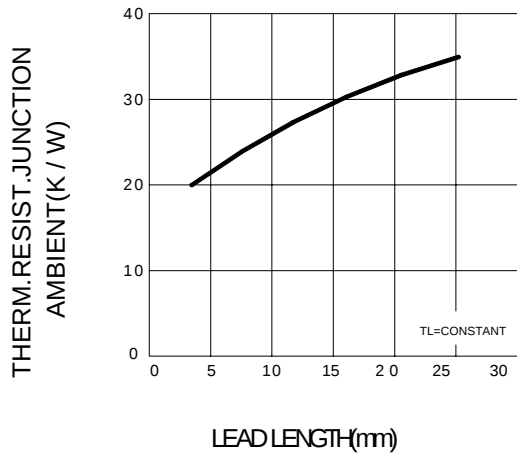
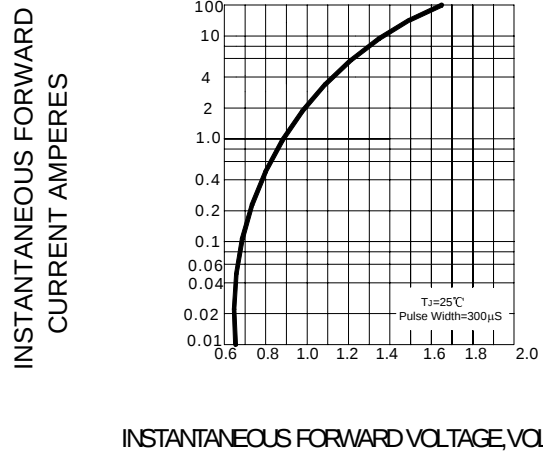
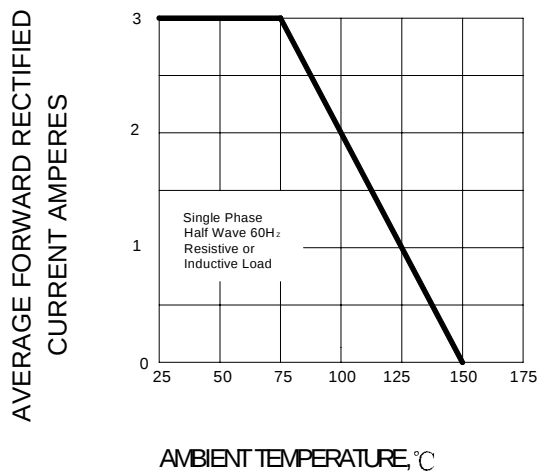
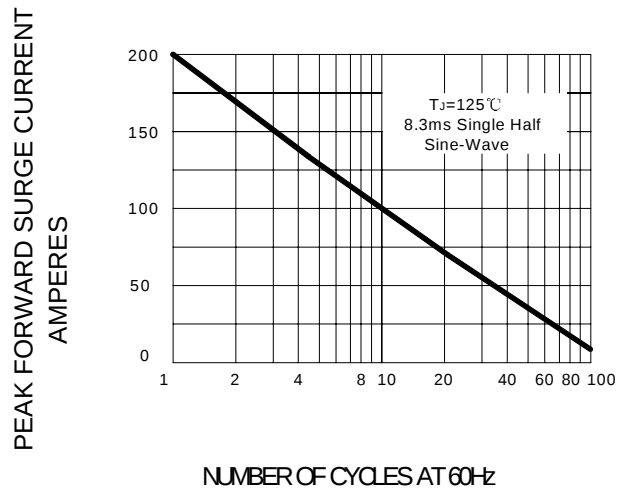
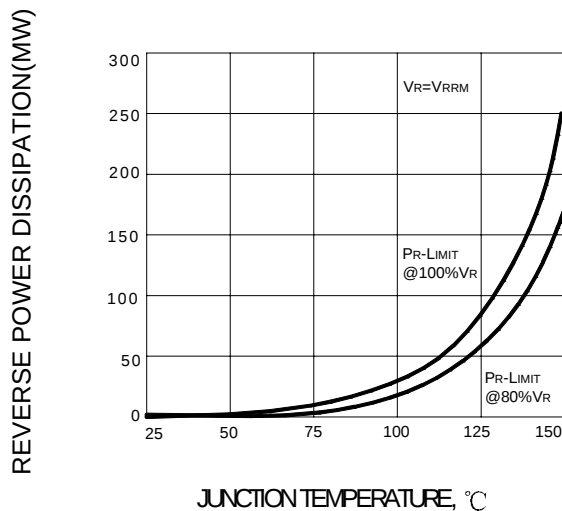
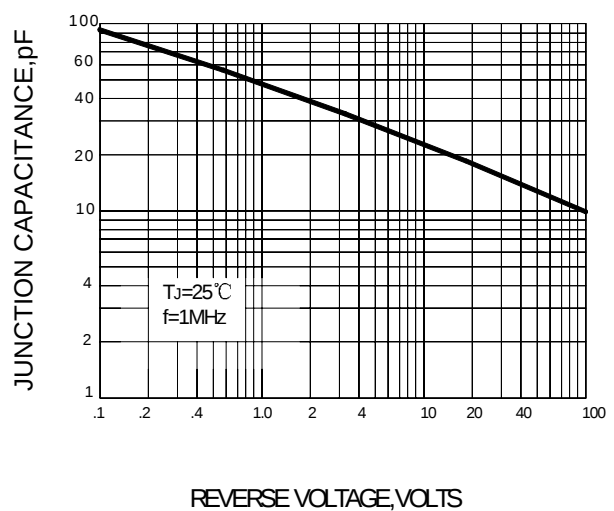
		BYW72	BYW73	BYW74	BYW75	BYW76	UNITS
Maximum recurrent peak reverse voltage	V_{RRM}	200	300	400	500	600	V
Maximum RMS voltage	V_{RMS}	140	210	280	350	420	V
Maximum DC blocking voltage	V_{DC}	200	300	400	500	600	V
Maximum average forward rectified current 9.5mm lead length, @ $T_A = 75^\circ\text{C}$	$I_{F(AV)}$	3.0					A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load @ $T_J = 125^\circ\text{C}$	I_{FSM}	200.0					A
Maximum instantaneous forward voltage @ 3.0 A	V_F	1.1					V
Maximum reverse current @ $T_A = 25^\circ\text{C}$ at rated DC blocking voltage @ $T_A = 100^\circ\text{C}$	I_R	10.0 100.0					μA
Maximum reverse recovery time (Note1)	t_{rr}	200					ns
Typical junction capacitance (Note2)	C_J	32					pF
Typical thermal resistance (Note3)	$R_{\theta JA}$	22					$^\circ\text{C/W}$
Operating junction temperature range	T_J	- 55 --- +150					$^\circ\text{C}$
Storage temperature range	T_{STG}	- 55 --- +150					$^\circ\text{C}$

NOTE: 1. Measured with $I_F = 0.5\text{A}$, $I_R = 1\text{A}$, $t_{rr} = 0.25\text{A}$.

2. Measured at 1.0MHz and applied reverse voltage of 4.0V DC.

3. Thermal resistance from junction to ambient.

Ratings AND Characteristic Curves

FIG.1 -MAX.THERMAL RESISTANCE VS.LEAD LENGTH

FIG.2 -TYPICAL FORWARD CHARACTERISTIC

FIG.3 -FORWARD DERATING CURVE

FIG.4-PEAK FORWARD SURGE CURRENT

FIG.5- MAX.REVERSE POWER DISSIPATION VS. JUNCTION TEMPERATURE

FIG.6-TYPICAL JUNCTION CAPACITANCE


Ratings AND Characteristic Curves

FIG.8 -THERMAL RESPONSE

